



BETTER SHIPS, BLUE OCEANS

Sea Shipping Emissions 2023: Netherlands Continental Shelf, 12-Mile Zone and Port Areas

Final Report

Report No. : 35761-1-MO-rev.2
Date : 18 February 2025
Version : 1
Final

Sea Shipping Emissions 2023: Netherlands Continental Shelf, 12-Mile Zone and Port Areas

Final Report

Ordered by : RIVM / Emissieregistratie
P.O. Box 1
3720 BA BILTHOVEN
The Netherlands

Gerapporteerd door : K.F. Kauffman, J. Hulskotte, R. Koch

Paraaf management :



Version	Date	Version description	Checked by
Rev.0	12 December	Draft	Y. Koldenhof
Rev.1	23 January	Draft	M. Bolech, R. Koch
Rev.2	18 February	Final	R. te Molder

CONTENTS	Page
TABLE OF TABLES.....	iii
TABLE OF FIGURES.....	iv
GLOSSARY OF DEFINITIONS AND ABBREVIATIONS	vi
1 INTRODUCTION.....	1
1.1 Objective.....	1
1.2 Report structure	1
2 EMISSION DATABASES.....	2
2.1 General information	2
2.2 Netherlands sea area and Dutch port areas	2
3 PROCEDURE FOR EMISSION CALCULATION	7
4 COMPLETENESS OF AIS DATA.....	9
4.1 Missing AIS minute files	9
4.2 AIS coverage	9
5 ACTIVITIES FOR THE DUTCH PORT AREAS AND THE NETHERLANDS SEA AREA	11
5.1 Introduction	11
5.2 Activities of seagoing vessels in the Dutch port areas	11
5.3 Activities of seagoing vessels in the Netherlands sea area (NCS and 12-mile zone)	19
5.4 Overview of ships in the port areas and in the Netherlands sea area	21
6 EMISSIONS FOR THE DUTCH PORT AREAS AND THE NETHERLANDS SEA AREA.....	22
6.1 Introduction	22
6.2 Emissions in port areas	22
6.3 Emissions in the Netherlands sea area (NCS and 12-mile zone).....	26
6.4 Spatial distribution of the emissions	27
7 EMISSIONS FOR THE FISHING ACTIVITIES IN THE DUTCH PORT AREAS, THE WADDEN SEA AND THE NETHERLANDS SEA AREA.....	39
7.1 Introduction	39
7.2 Emissions of fishing vessels (EMS type 11).....	39
8 SUMMARY AND CONCLUSIONS	48
REFERENCES	49
APPENDIX A: EMISSION FACTORS	A1
A1 SAILING AND MANOEUVRING.....	A1
A1.1 Main Engines.....	A1
A1.2 Multiple propulsion engines.....	A3
A1.3 Auxiliary Engines and Equipment.....	A8
A1.4 Engine Emission Factors.....	A8
A1.5 Fuel allocation	A12
A1.6 Correction factors of engine Emission Factors	A13
A2 EMISSIONS OF SHIPS AT BERTH	A16

A3	FISHERIES	A18
	A3.1 Activity data	A18
	A3.2 Emission factors	A18

TABLE OF TABLES

Table 3-1	Link between AIS data (MMSI number) and IHS data (IMO number).....	7
Table 3-2	MMSI distribution in port of Rotterdam, Ems and Harlingen 2023	8
Table 5-1	Cargo handling x 1000 tons extracted from websites of the ports	11
Table 5-2	Shipping activities per EMS type for the Dutch part of the Western Scheldt	13
Table 5-3	Shipping activities per EMS ships size classes for the Dutch part of the Western Scheldt	13
Table 5-4	Shipping activities per EMS type for the Rotterdam port area	14
Table 5-5	Shipping activities per EMS ships size class for the Rotterdam port area	14
Table 5-6	Shipping activities per EMS type for the Amsterdam port area	15
Table 5-7	Shipping activities per EMS ships size classes for the Amsterdam port area	15
Table 5-8	Shipping activities per EMS type for the Dutch part of the Ems area	16
Table 5-9	Shipping activities per EMS ships size classes for the Dutch part of the Ems area	16
Table 5-10	Shipping activities per EMS type for the port area of Den Helder	17
Table 5-11	Shipping activities per EMS ships size classes for the port area of Den Helder.....	17
Table 5-12	Shipping activities per EMS type for the port area of Harlingen.....	18
Table 5-13	Shipping activities per EMS ships size classes for the port area of Harlingen	18
Table 5-14	Shipping activities per EMS type for the Netherlands Continental Shelf and 12-mile zone	20
Table 5-15	Shipping activities per ship size class for the Netherlands Continental Shelf and 12-mile zone.....	20
Table 5-16	Average number of ships per day, in distinguished areas, excluding fishing vessels.	21
Table 6-1	Total emissions in ton in each port area for 2023, excluding fishing vessels (EMS-type 11)	24
Table 6-2	Emissions in each port area for 2023 as percentage of the emissions in 2022, excluding fishing vessels (EMS-type 11).	25
Table 6-3	Emissions of ships in ton in the Netherlands sea area for 2023 compared with 2022, excluding fishing vessels (EMS-type 11).	26
Table 7-1	Total emissions in ton in each port area for 2023, fishing vessels including trawlers.....	40
Table 7-2	Emissions in each port area for 2023 as percentage of the emissions in 2022, fishing vessels including trawlers	41
Table 7-3	Total emissions in ton in the 12 mile zone and the NCP for 2023, fishing vessels including trawlers.....	42
Table 7-4	Emissions in 12 miles and NCP for 2023 as percentage of the emissions in 2022, fishing vessels including trawlers	43

TABLE OF FIGURES

Figure 2-1	Grid points for The Netherlands Continental Shelf, 12-mile zone, The Wadden Sea and six port areas	3
Figure 2-2	Rotterdam and the Western Scheldt: The points indicate the centres of grid cells for which emissions are calculated.....	4
Figure 2-3	Amsterdam and Den Helder: The points indicate the centres of grid cells for which emissions are calculated.....	5
Figure 2-4	Harlingen, the Wadden Sea and Ems: The points indicate the centres of grid cells for which emissions are calculated.....	6
Figure 4-1	AIS base stations delivering data to the Netherlands Coastguard. Due to security reasons, this map is no longer completely up to date.	10
Figure 4-2	June 2023, relative number of signals lost with respect to signals received per grid cell.	10
Figure 5-1	Average number of not moving and moving ships per day for 2017 up to 2023, excluding fishing vessels.....	21
Figure 6-1	CO ₂ emissions in ton in each port area for 2017-2023, excluding fishing vessels.	22
Figure 6-2	NO _x emissions in ton in each port area for 2017-2023, excluding fishing vessels.	23
Figure 6-3	SO ₂ emissions in ton in each port area for 2017-2023, excluding fishing vessels.....	23
Figure 6-4	CO ₂ , NO _x and SO ₂ emissions in ton in the Netherlands sea area for 2010-2023, excluding fishing vessels.	26
Figure 6-5	NO _x emission in 2023 in the Dutch part of the Western Scheldt by ships with AIS.	28
Figure 6-6	Absolute change in NO _x emission from 2022 to 2023 in the Dutch part of the Western Scheldt by ships with AIS.....	28
Figure 6-7	Relative change in NO _x emission from 2022 to 2023 in the Dutch part of the Western Scheldt by ships with AIS.....	29
Figure 6-8	NO _x emission in 2023 in the port area of Rotterdam by ships with AIS.	29
Figure 6-9	Absolute change in NO _x emission from 2022 to 2023 in the port area of Rotterdam by ships with AIS.	30
Figure 6-10	Relative change in NO _x emission from 2022 to 2023 in the port area of Rotterdam by ships with AIS.	30
Figure 6-11	NO _x emission in 2023 in the port area of Amsterdam by ships with AIS.....	31
Figure 6-12	Absolute change in NO _x emission from 2022 to 2023 in the port area of Amsterdam by ships with AIS.	31
Figure 6-13	Relative change in NO _x emission from 2022 to 2023 in the port area of Amsterdam by ships with AIS.	32
Figure 6-14	NO _x emission in 2023 in the Ems area by ships with AIS.	32
Figure 6-15	Absolute change in NO _x emission from 2022 to 2023 in the Ems area by ships with AIS.	33
Figure 6-16	Relative change in NO _x emission from 2022 to 2023 in the Ems area by ships with AIS.	33
Figure 6-17	NO _x emission in 2023 in the port area of Den Helder by ships with AIS.....	34
Figure 6-18	Absolute change in NO _x emission from 2022 to 2023 in the port area of Den Helder by ships with AIS.	34
Figure 6-19	Relative change in NO _x emission from 2022 to 2023 in the port area of Den Helder by ships with AIS.	35
Figure 6-20	NO _x emission in 2023 in the port area of Harlingen by ships with AIS.....	35
Figure 6-21	Absolute change in NO _x emission from 2022 to 2023 in the port area of Harlingen by ships with AIS.	36
Figure 6-22	Relative change in NO _x emission from 2022 to 2023 in the port area of Harlingen by ships with AIS.	36
Figure 6-23	NO _x emission in 2023 in the NCS, the 12-mile zone and the Dutch port areas by ships with AIS.....	37
Figure 6-24	Absolute change in NO _x emission from 2022 to 2023 in the NCS, the 12-mile zone and in the Dutch port areas by ships with AIS.....	37

Figure 6-25	Relative change in NO _x emission from 2022 to 2023 in the NCS, the 12-mile zone and in the Dutch port areas by ships with AIS.....	38
Figure 7-1	CO ₂ emission observed in the NCS, fishing vessels including trawlers, based on AIS data of 2023	44
Figure 7-2	Absolute change in CO ₂ emission from 2022 to 2023 observed in the NCS, fishing vessels including trawlers.....	44
Figure 7-3	Relative change in CO ₂ emission from 2022 to 2023 observed in the NCS, fishing vessels including trawlers.....	45
Figure 7-4	CO ₂ emission observed in the Dutch Wadden Sea, fishing vessels including trawlers, based on AIS data of 2023	45
Figure 7-5	Absolute change in CO ₂ emission from 2022 to 2023 in the Dutch Wadden Sea, fishing vessels including trawlers.	46
Figure 7-6	Relative change in CO ₂ emission from 2022 to 2023 in the Dutch Wadden Sea, fishing vessels including trawlers.	46
Figure 7-7	Relative change of traffic intensity fishing vessels from 2022 to 2023 on the NCS (source “Netwerkanalyse Noordzee 2023”)	47

GLOSSARY OF DEFINITIONS AND ABBREVIATIONS

Definitions:

Ship characteristics database IHS-database (Lloyds Register of ships) contains vessel characteristics of over 120,000 seagoing merchant vessels larger than 100 GT operating worldwide. The information includes year of built, vessel type, vessel size, service speed, installed power of main and auxiliary engine.

Netherlands sea area NCS and 12-mile zone

Abbreviations/Substances:

Methane (CH₄) Gas formed from the combustion of LNG. Substance number **1011**

VOC Volatile Organic Compounds. Substance number **1237**

Sulphur dioxide (SO₂) Gas formed from the combustion of fuels that contain sulphur. Substance number **4001**

Nitrogen oxides (NO_x) The gases nitrogen monoxide (NO) and nitrogen dioxide (NO₂). NO is predominantly formed in high temperature combustion processes and can subsequently be converted to NO₂ in the atmosphere. Substance number **4013**

Carbon Monoxide (CO) A highly toxic colourless gas, formed from the combustion of fuel. Particularly harmful to humans. Substance number **4031**

Carbon Dioxide (CO₂) Gas formed from the combustion of fuel. Substance number **4032**

PM Particulates from marine diesel engines irrespective of fuel type. Substance number **6598**

PM-MDO Particulates from marine diesel engines operated with distillate fuel oil. Substance number **6601**

PM-HFO Particulates from marine diesel engines operated with residual fuel oil. Substance number **6602**

Abbreviations/Other:

<i>AIS</i>	Automatic Identification System
<i>EMS</i>	Emissieregistratie en Monitoring Scheepvaart (Emission inventory and Monitoring for the shipping sector)
<i>GT</i>	Gross Tonnage
<i>IHS</i>	IHS Maritime World Register of Ships
<i>IMO</i>	International Maritime Organization
<i>LLI</i>	Lloyd's List Intelligence (previously LLG and LMIU)
<i>m</i>	meter
<i>MMSI</i>	Maritime Mobile Service Identity is a unique number to call a ship. The number is added to each AIS message.
<i>NCS</i>	Netherlands Continental Shelf
<i>nm</i>	nautical mile or sea mile is 1852m
<i>SAMSON</i>	Safety Assessment Model for Shipping and Offshore on the North Sea
<i>TSS</i>	Traffic Separation Scheme

1 INTRODUCTION

1.1 Objective

This study aims to determine the emissions to air of seagoing vessels and fishing vessels for 2023. The results of both the seagoing vessels and the fishing vessels are included in the current document. The totals and the spatial distribution for the Netherlands Continental Shelf, the 12-mile zone, the Wadden Sea and the port areas Rotterdam, Amsterdam, the Ems, the Western Scheldt, Den Helder and Harlingen are all based on AIS data. The emissions for 2023 are determined for CH₄, VOC, SO₂, NO_x, CO, CO₂ and Particulate Matter (PM).

The grid size for the port area emissions, the Wadden Sea and the 12-mile zone is 500 x 500 m, for the Netherlands Continental Shelf area a grid size of 5000 x 5000 m has been used.

1.2 Report structure

Chapter 2 describes the emission databases that were compiled for 2023.

Chapter 3 describes the procedure used for the emission calculation based on AIS data.

Chapter 4 describes the completeness of the AIS data with respect to missing files and to spots that are not fully covered by base stations.

Chapter 5 contains the level of shipping activity in the Dutch port areas and the Netherlands sea area.

Chapter 6 summarises the emissions for 2023 for the Dutch port areas and the Netherlands sea area and makes a comparison with 2022.

Chapter 7 contains the emissions results for 2023 for the fishing activities.

Chapter 8 presents conclusions and recommendations.

2 EMISSION DATABASES

2.1 General information

A set of comma-separated databases with the calculated emissions to air from sea shipping have been delivered for:

- the Netherlands sea area (NCS and 12-mile zone);
- the six Dutch port areas Rotterdam, Amsterdam, the Ems, the Western Scheldt, Den Helder Harlingen and the Wadden Sea.

For the information on what can be found in the databases, refer to [1].

2.2 Netherlands sea area and Dutch port areas

The emissions in the Netherlands sea area and the six Dutch port areas have been delivered in MARIN nextCloud (<https://nextcloud.marin.nl>):

- db_emissionsresults_12Miles500.txt
- db_emissionsresults_OutOf12.txt
- db_emissionresults_portareas.txt

The emissions have been calculated on a 5000 x 5000 m grid for the NCS and on a 500 x 500 m grid in the 12-mile zone and in the port areas.

The Netherlands sea area and the port areas are presented in Figure 2-1. The different areas are indicated by plotting the centre points of the grid cells with different colours.

The six port areas are illustrated in more detail in Figure 2-2 to Figure 2-4. At some places, there are grid points on land. There are several reasons for this. In general, the detail of the charts presented here is such that not all existing waterways and/or quays are visible, though they do exist. In addition, we noticed that container cranes disturb the determination of the GPS position and therefore the AIS-message is not containing the correct position. When, for whatever reason, AIS signals are disturbed or lost positions are extrapolated and this is done before MARIN receives the data.

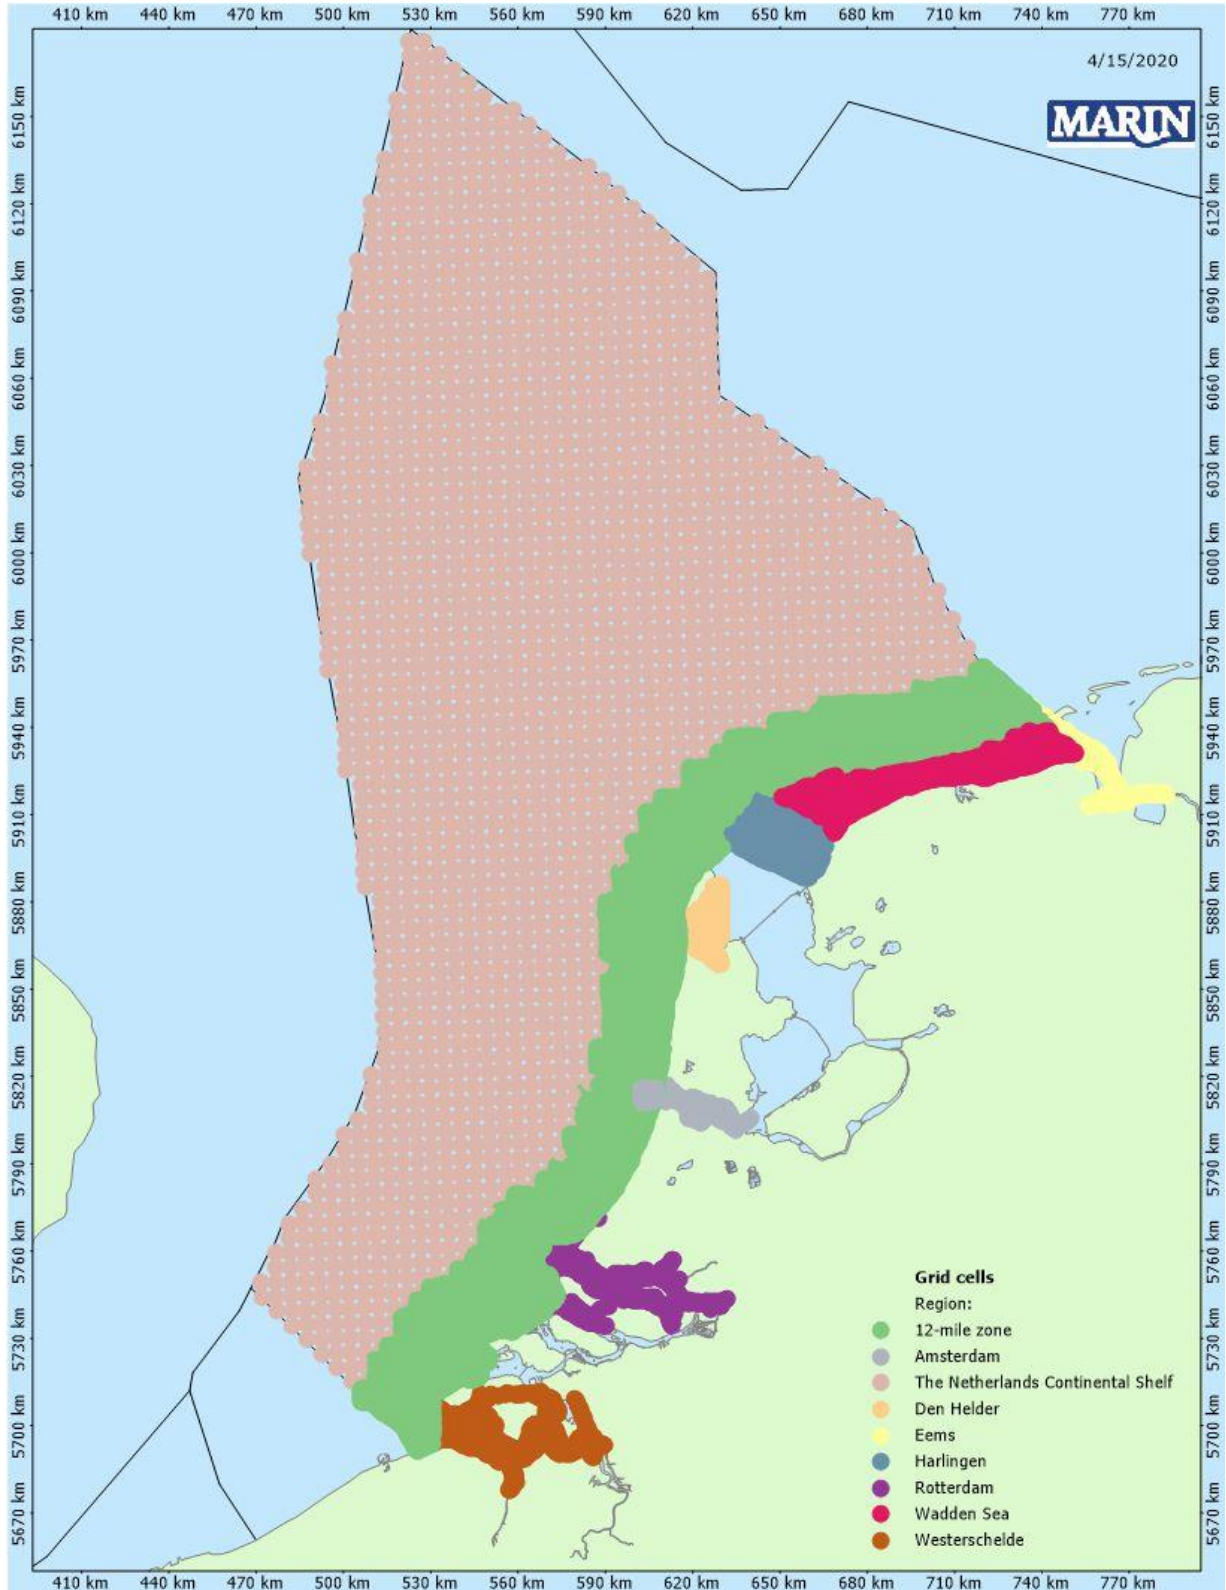


Figure 2-1 Grid points for The Netherlands Continental Shelf, 12-mile zone, The Wadden Sea and six port areas

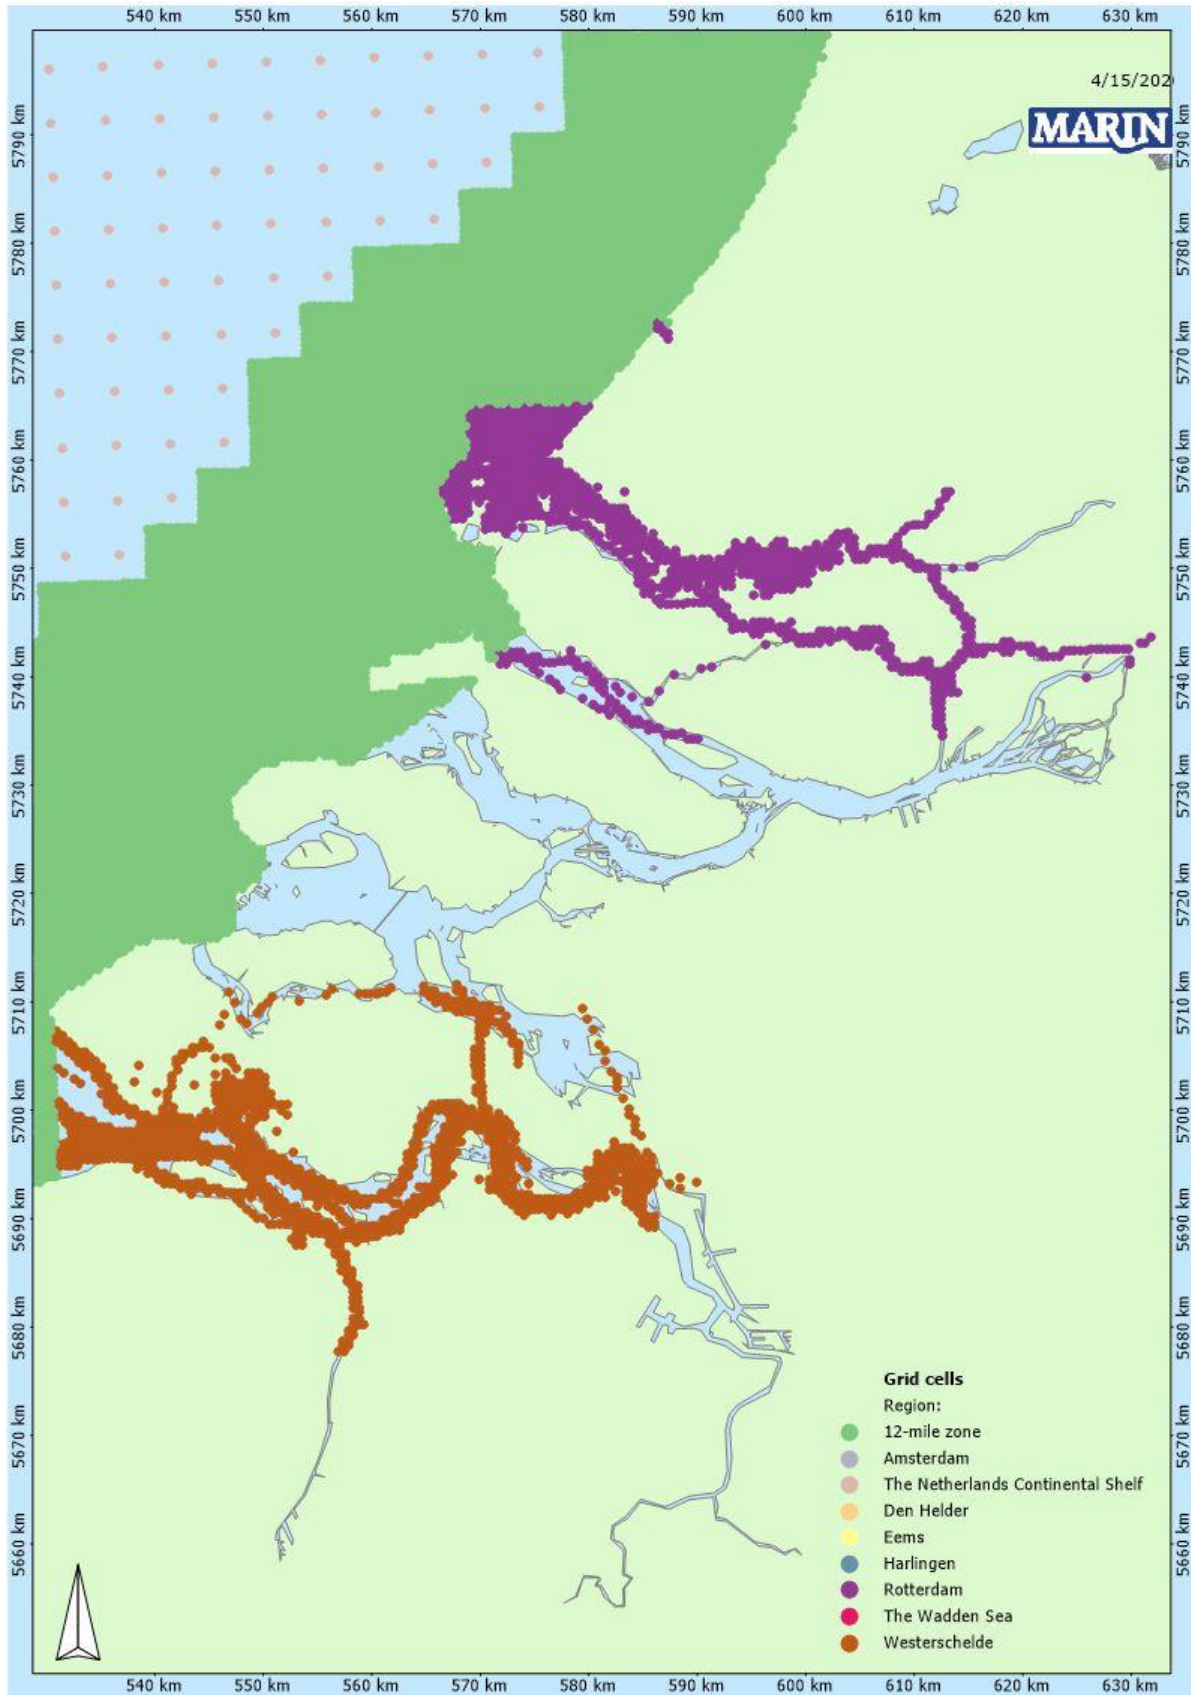


Figure 2-2 Rotterdam and the Western Scheldt: The points indicate the centres of grid cells for which emissions are calculated

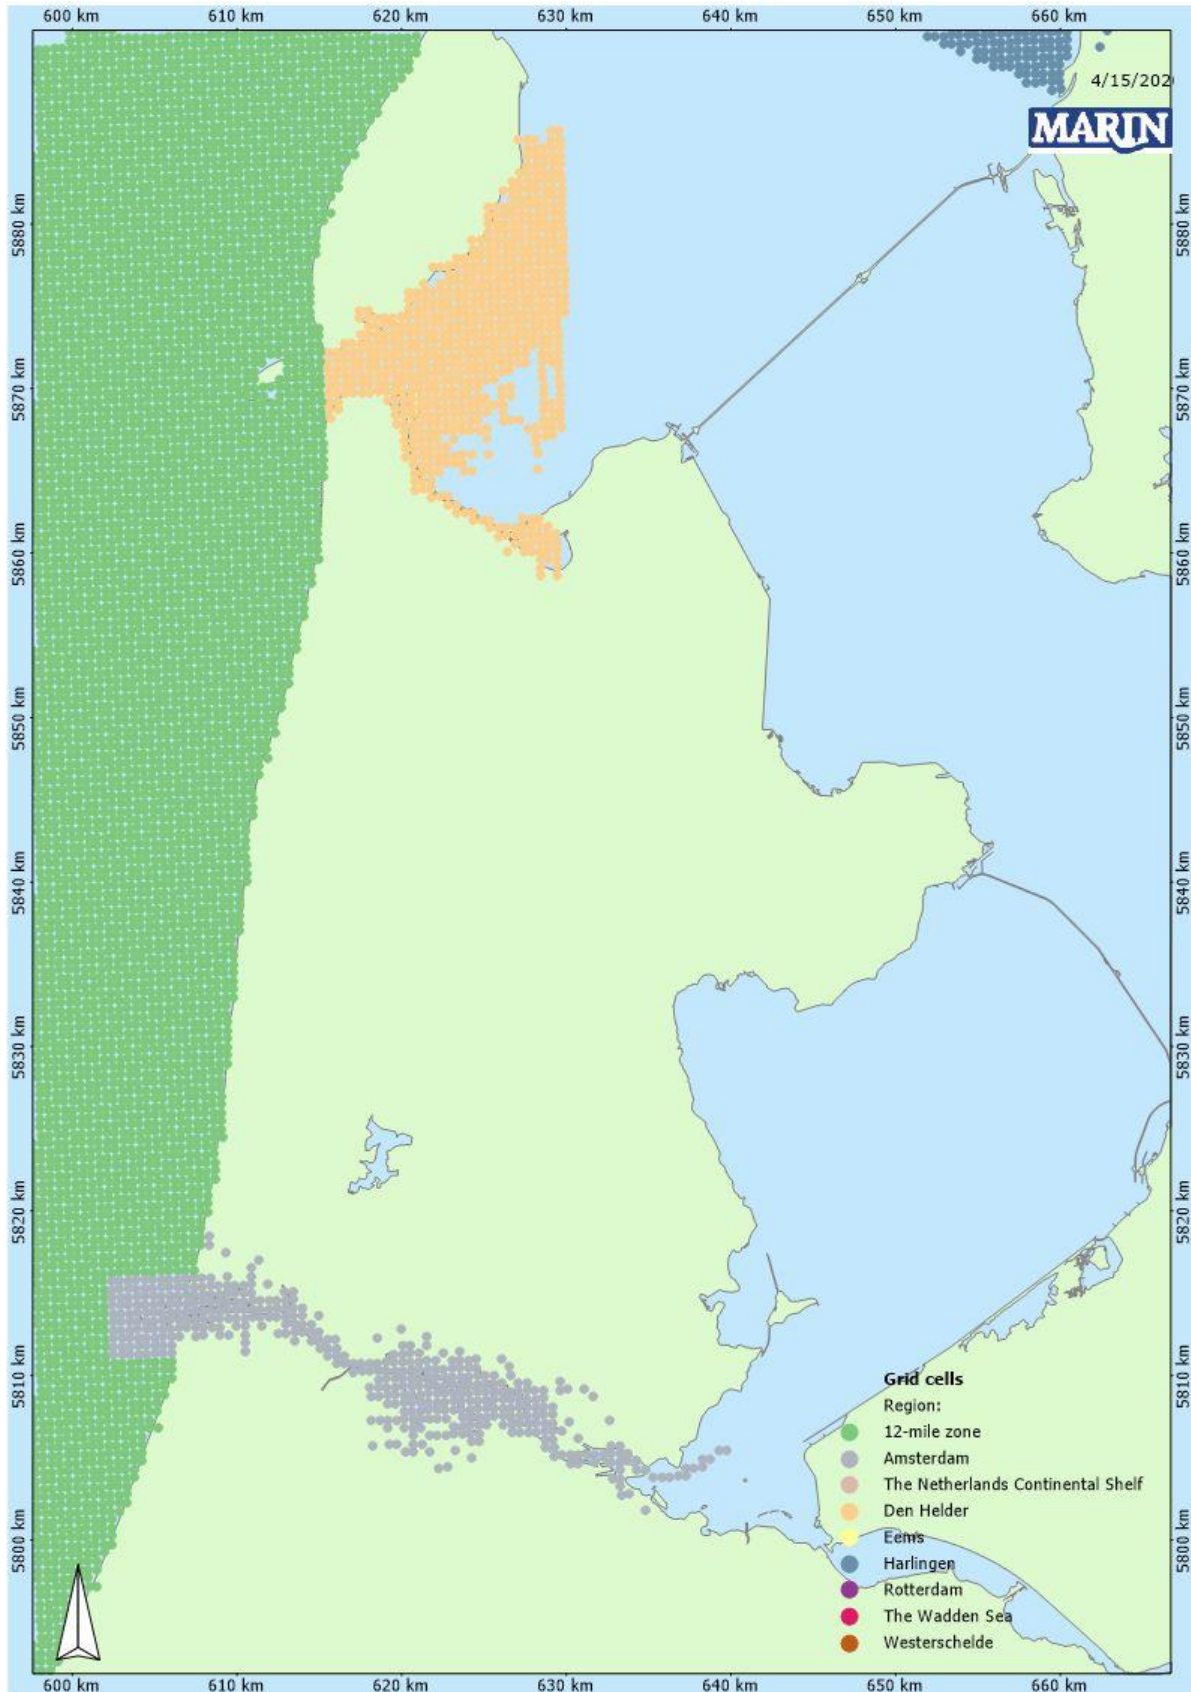


Figure 2-3 Amsterdam and Den Helder: The points indicate the centres of grid cells for which emissions are calculated

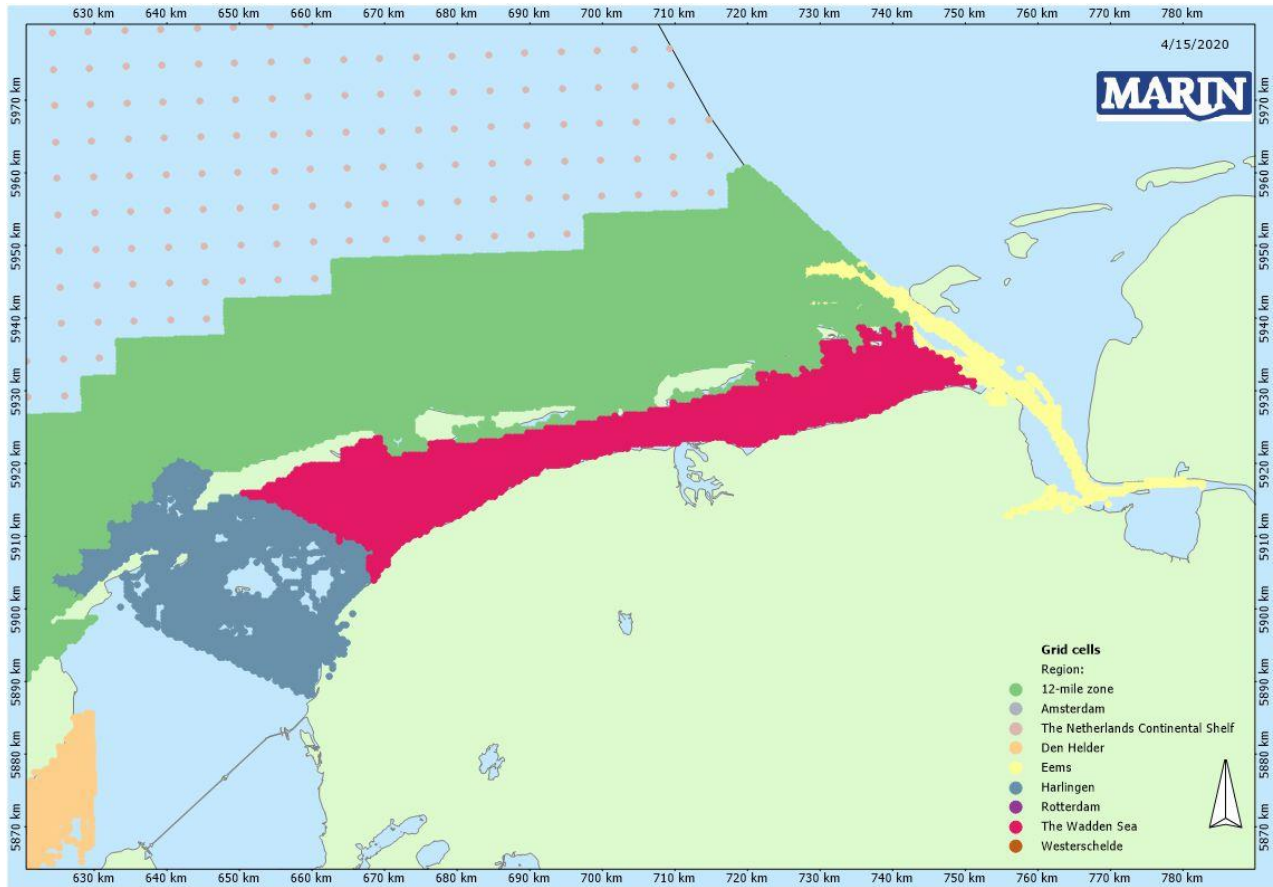


Figure 2-4 Harlingen, the Wadden Sea and Ems: The points indicate the centres of grid cells for which emissions are calculated

3 PROCEDURE FOR EMISSION CALCULATION

This chapter describes the procedures for the emission calculation, which is based on AIS data. The AIS data has been used to calculate the emissions for both NCS, the 12-mile zone, the Wadden Sea area and the six Dutch port areas. In the appendix, TNO provides more information about the current calculation method.

AIS data

In this study, AIS data of 2023 received by the Netherlands Coastguard has been used to calculate the emissions. Refer to [1] for background information about the AIS data.

IHS and the Port of Rotterdam

Just like in the previous study, the emission calculation of 2022, TNO has calculated emission factors for the Port of Rotterdam, using ship characteristics provided by IHS Maritime World Register of Ships to the Port of Rotterdam. Since the IHS database was available to TNO, the emissions factors for all ships seen in the areas of interest of this study were based on this database.

In the AIS data the identifier for the ship is the MMSI number, not the IMO-number. The identifier for the emission factor based on the ship database of IHS is the IMO-number of a vessel. Therefore, a link is necessary between the MMSI-numbers in the AIS messages and the emission factors based on the ship database of IHS, identified by IMO-number.

The available AIS-data for the study area in 2023 comprised 49,467 valid MMSI numbers. Based on these MMSI-numbers, 15,615 commercial seagoing vessels could be identified (see Table 3-1). About 43% of all messages obtained, were sent by the 15,615 commercial vessels for which emission factors were calculated.

Table 3-1 Link between AIS data (MMSI number) and IHS data (IMO number)

	Total individual valid mmsi	Total valid mmsi emission factors included	Total valid messages obtained	Total valid messages obtained emission factors included	Valid messages obtained emission factors included [%]
2017	33,612	12,952	733,405,583	328,970,302	45%
2018	36,167	12,797	865,399,825	375,120,674	43%
2019	37,970	13,238	910,441,140	386,801,288	42%
2020	37,321	13,914	946,587,638	442,001,668	47%
2021	39,159	14,376	914,653,016	418,725,035	46%
2022	44,670	15,709	962,616,821	447,947,568	47%
2023	49,467	15,615	979,950,539	423,192,212	43%

Samples taken of unidentified MMSI - thus without IMO number and emission factor - learned that far most of these MMSI could be attributed to non-commercial small vessels and fixed objects (like aid to navigation, wind turbines and oil and gas installations).

Also inland or recreational vessels are not relevant with respect to sea shipping emissions. Based on experience from earlier studies it is estimated roughly that at maximum 250 commercial seagoing vessels could not be identified, representing about 2% of shipping emissions.

As an example the table below shows the distribution of the number of MMSI numbers in port of Rotterdam, Ems and Harlingen in 2023.

Table 3-2 MMSI distribution in port of Rotterdam, Ems and Harlingen 2023

	Rdam	Ems	Harl
Total valid MMSI	16,881	4,591	7,207
MMSI emission factors included	40%	31%	9%
Inland vessels without emissions factors	21%	20%	10%
Recreational vessel without emissions factors	32%	38%	71%
Unidentified MMSI without emissions factors	7%	11%	10%

4 COMPLETENESS OF AIS DATA

This chapter describes the completeness of the AIS data. In 4.1 the missing minute files are described and in 4.2 the coverage of the AIS data.

4.1 Missing AIS minute files

The sample frequency of the AIS runs is exactly 2 minutes. In case the gap between the signals is less than 10 minutes, this has no effect on the results, because each ship is kept in the system until no AIS message has been received during 10 minutes. The sum of missing periods, which are larger than 10 minutes is negligible for 2023. The AIS data is practically complete, so there is no need to compensate for this.

4.2 AIS coverage

In the previous section, the number of files received from the Netherlands Coastguard describes the completeness of the data. This does not necessarily mean that the available minute files cover the total area all the time. This is illustrated in Figure 4-1, in which some base stations that deliver data to the Netherlands Coastguard are plotted. The circle with a radius of 20 nautical miles around each base station illustrates the area covered by that base station. Due to security reasons, this map is no longer completely up to date.

In reality, the covered area varies with the atmospheric conditions. Figure 4-1 shows that some areas are covered by several base stations, while other areas are covered by only one base station and some areas are only covered with favourable atmospheric conditions, when the base stations reach further than 20 nautical miles. This means that there are a few weak spots in the Netherlands sea area and in the Dutch port areas:

- the area in the northern part of the NCS, which is not covered at all. This is not a large shortcoming because the shipping density is very low in this area;
- the Western Scheldt close to the border with Belgium,
- the spot close to the border with the United Kingdom Continental Shelf, southwest of Rotterdam.

For the Netherlands sea area, the weak spots in the collection of the AIS data are identified by the locations where ships lose contact. After 10 minutes without receiving a new AIS message of a ship, the ship is removed from the system. Figure 4-2 show in each cell of 5x5km the number of ships that lose AIS contact with Dutch AIS base stations relative to the total number of observations of ships in this grid cell. Sometimes the data reception of AIS messages is recovered after some time, which is the case in the center area of the Netherlands sea area. However, on most locations near the border of the Netherlands sea area it means that the ship has left the system until its next journey through the Netherlands sea area. Thus, the figure shows more or less the locations where ships are removed from the system. The ideal situation would be if the ships that leave the system were located outside the Netherlands sea area, which is the case on a large part of the west side of the NCS.

The figure show the coverage for June 2023. This month is chosen so that the data can be compared with previous registrations. The overall coverage of AIS data of 2023 seems in most places of the same order of magnitude compared to the AIS coverage of 2022. However, fluctuations in coverage are expected due to the dependency on atmospheric conditions.

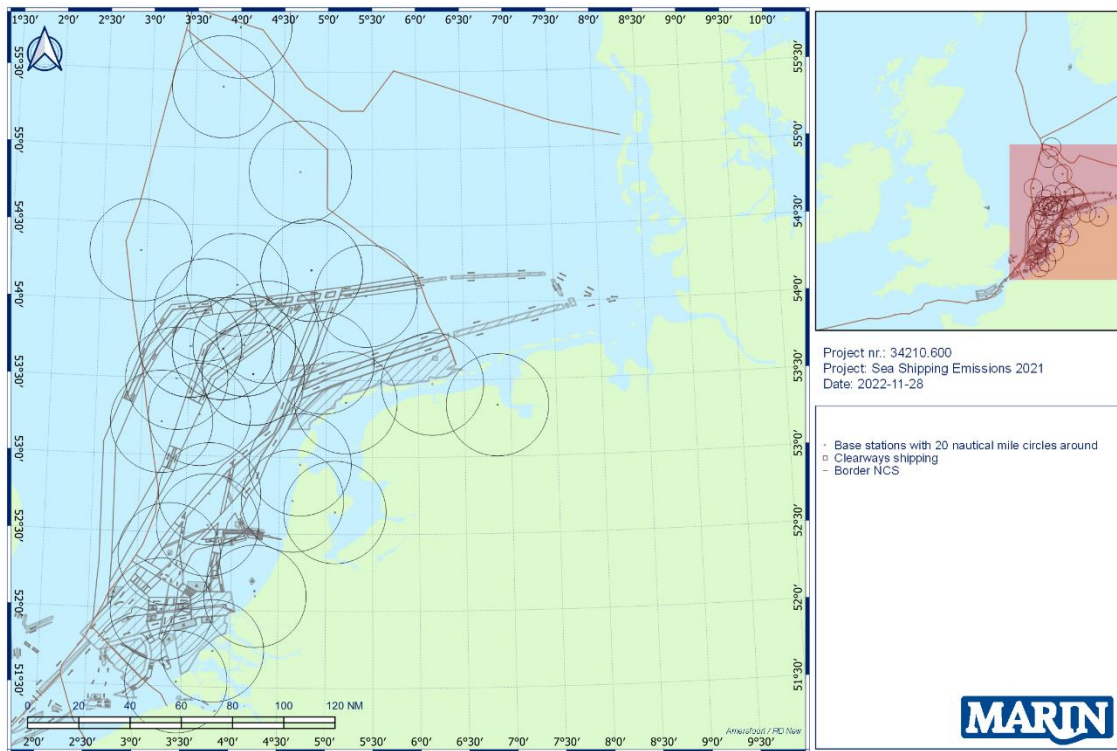


Figure 4-1 AIS base stations delivering data to the Netherlands Coastguard. Due to security reasons, this map is no longer completely up to date.

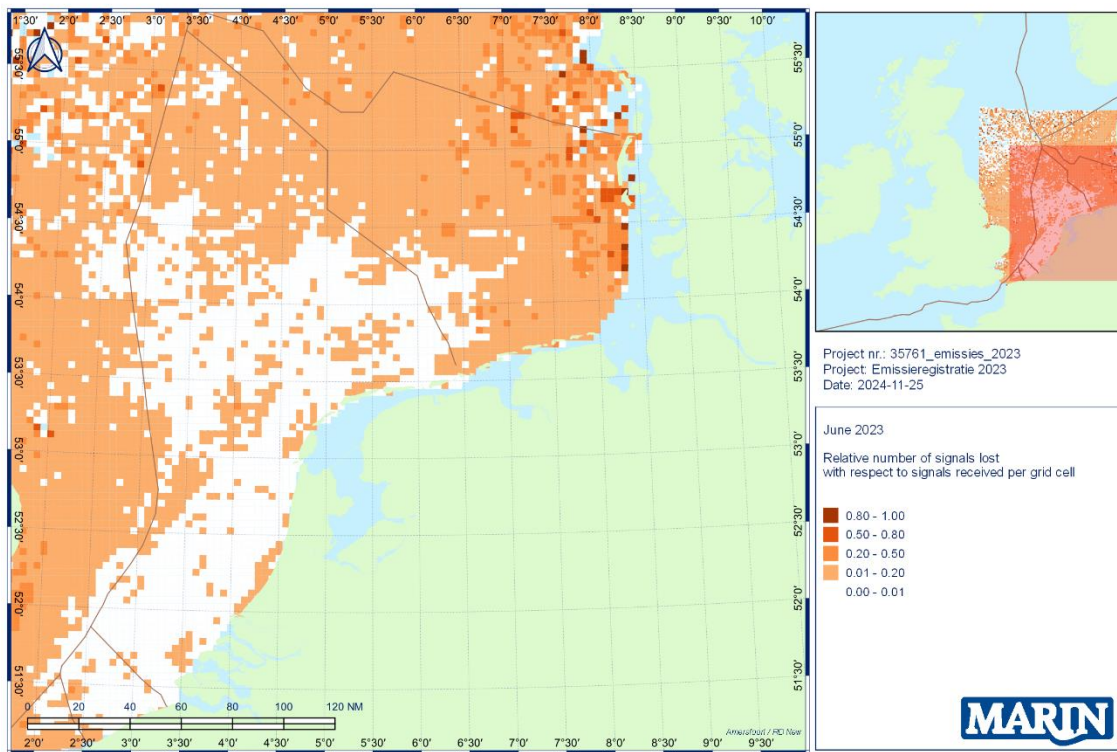


Figure 4-2 June 2023, relative number of signals lost with respect to signals received per grid cell.

5 ACTIVITIES FOR THE DUTCH PORT AREAS AND THE NETHERLANDS SEA AREA

5.1 Introduction

This chapter presents the activities of seagoing vessels for 2023 in the Dutch port areas and in the Netherlands sea area. The activities of 2023 are compared to those of 2022. Section 5.2 describes the activities in the port areas, Section 5.3 the activity in the Netherlands sea area and Section 5.4 the number of ships in these areas.

5.2 Activities of seagoing vessels in the Dutch port areas

Shipping activities in the six Dutch port areas are determined to calculate the emissions in these areas. The activities extracted from AIS are important explanatory parameters for the total emissions. The other parameter is the emission factor, which has been discussed in [1].

Table 5-1 presents activity numbers that could be extracted from the websites of the ports areas [10]. These numbers can be used to check the information on activity as derived from the AIS data. The table contains the cargo handling for the main ports areas.

Table 5-1 *Cargo handling x 1000 tons extracted from websites of the ports*

Port area	Ports	2021	2022	2023
Amsterdam	Amsterdam	71,3	78,6	63,0
Eems	Eems	13,3	13,0	14,1
Rotterdam	Rijn- / Maasmond area	468,7	467,4	438,8
Western Scheldt	Antwerp-Bruges	288,949	286.960	271.400

The shipping activities of 2023 are presented for each port area in a table per ship type and a table per ship size class and compared with the activities observed in 2022. Take into account that some percentages can vary a lot due to the low absolute numbers or that a MMSI number is not linked to an emission factor. Another cause of variation may be due to the AIS responder being turned off or not by the responsible officer upon arrival in the port. Therefore, the (AIS-) methodology for investigating berthed ships may have to be revised.

Western Scheldt

The activity tables, Table 5-2 and Table 5-3, show that the moving hours decreased with 3.0% and the GT.nm (gross tonnage time's nautical miles) increased with 7%. For berthed ships the hours decreased by 1% and GT.hours decreased with 9%. The activity numbers that could be extracted from the port websites show an decrease in cargo handling of 5.5%.

Rotterdam

The activity tables, Table 5-4 and Table 5-5, for Rotterdam show that the moving hours are the same as last year and the GT.nm decreased with 3%. Berthed activities, hours and GT.hours, decreased with 10% and 11% respectively. The decrease in berthed and moving hours is in line with the activity numbers that could be extracted from the port websites, they show an downward trend in cargo handling. For example, container throughput in tonnes was 6.8% lower in 2023 at 130.1 million tonnes.

Amsterdam

The activity tables, Table 5-6 and Table 5-7, for Amsterdam show that the moving hours are the same as last year and the GT.nm decreased by 9%. The berthed hours increased with 12% and the berthed GT.hours decreased with 14%. This is in line with the activity numbers that could be extracted from the port websites.

Ems

The activity tables, Table 5-8 and Table 5-9, for the Ems show that the moving hours increased with 3% and the GT.nm increased with 15%. The berthed hours increased with 41% and the berthed GT.hours increased with 24%. The activity numbers that could be extracted from the port websites show also an increase in cargo handling of 8.5%.

Den Helder

The activity tables, Table 5-10 and Table 5-11, for Den Helder show that the moving hours decreased with 9% and the GT.nm decreased with 16%. The berthed hours decreased with 12% and the berthed GT.hours decreased with 11%.

Harlingen

The activity tables, Table 5-12 and Table 5-13, for Harlingen show that the moving hours and GT.nm increased with 3% and 4% respectively. The berthed hours decreased with 1% and the berthed GT.hours decreased with 39%.

Table 5-2 Shipping activities per EMS type for the Dutch part of the Western Scheldt

Ship type	Totals for Western Scheldt in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
Oil tanker	8,664	308,764,004	4,103	1,461,195,532	9.9	119%	125%	96%	103%	99%
Chem.+ Gas tanker	66,685	812,973,500	42,124	5,305,101,180	10.2	96%	94%	96%	95%	99%
Bulk carrier	41,673	1,221,721,236	9,680	2,434,392,596	8.4	75%	68%	88%	84%	100%
Container ship	6,232	176,100,153	27,304	20,952,173,048	12.5	105%	119%	109%	116%	98%
General Dry Cargo	120,183	840,366,901	35,747	1,782,701,642	9.7	103%	99%	94%	98%	101%
RoRo Cargo / Vehicle	16,908	493,746,546	10,022	6,096,154,343	12.2	110%	112%	103%	104%	108%
Reefer	12,715	169,979,205	863	117,317,970	9.2	89%	81%	101%	96%	95%
Passenger	23,066	32,800,571	5,257	101,856,386	10.9	84%	72%	97%	106%	108%
Miscellaneous	282,655	528,687,114	32,620	550,775,408	8.2	111%	143%	103%	121%	97%
Tug/Supply	186,646	581,695,903	22,191	81,476,556	7.2	90%	86%	87%	89%	105%
Total / Average	765,427	5,166,835,133	189,911	38,883,144,661	9.8	99%	91%	97%	107%	101%

Table 5-3 Shipping activities per EMS ships size classes for the Dutch part of the Western Scheldt

Ship size in GT	Totals for Western Scheldt in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
100-1,600	311,846	153,858,833	35,820	134,549,135	7.7	101%	110%	88%	83%	104%
1,600-3,000	107,854	257,959,643	28,789	620,169,738	8.2	105%	107%	93%	93%	98%
3,000-5,000	81,689	320,628,499	19,977	770,953,111	10.0	106%	107%	91%	91%	108%
5,000-10,000	50,223	338,722,273	25,151	1,773,121,498	10.2	105%	104%	112%	106%	101%
10,000-30,000	107,042	2,079,971,793	34,434	7,504,397,914	11.2	92%	95%	98%	97%	99%
30,000-60,000	36,621	1,506,988,849	19,526	9,690,758,031	10.7	77%	79%	101%	104%	99%
60,000-100,000	6,365	481,006,584	9,470	8,820,749,779	11.6	109%	106%	103%	105%	102%
>100,000	152	23,708,211	2,501	4,641,186,149	9.5	18%	24%	61%	60%	87%
Total / Average	765,430	5,166,835,133	187,709	33,964,833,089	9.6	99%	91%	96%	93%	102%

Table 5-4 Shipping activities per EMS type for the Rotterdam port area

Ship type	Totals for Rotterdam in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
Oil tanker	14,919	1,354,817,676	3,345	1,622,781,234	7.9	62%	74%	92%	91%	99%
Chem.+ Gas tanker	16,698	567,360,993	13,806	1,765,266,827	8.5	59%	57%	104%	100%	100%
Bulk carrier	58,278	3,515,105,824	2,116	613,442,985	7.7	92%	92%	86%	79%	101%
Container ship	143,615	10,968,946,169	17,783	5,112,354,720	8.6	89%	90%	95%	103%	100%
General Dry Cargo	28,347	142,004,481	8,671	355,775,723	9.6	101%	78%	111%	92%	97%
RoRo Cargo / Vehicle	20,077	813,126,498	6,562	2,703,582,608	10.9	101%	102%	97%	98%	105%
Reefer	61	863,568	57	5,132,705	10.2	3050%	7073%	158%	197%	90%
Passenger	436	24,011,406	283	284,504,094	9.3	14%	86%	122%	137%	97%
Miscellaneous	56,588	242,672,535	13,109	397,535,255	7.6	84%	157%	87%	86%	99%
Tug/Supply	174,586	1,926,534,215	37,911	995,753,136	7.2	100%	96%	106%	83%	104%
Total / Average	513,605	19,555,443,365	103,643	13,856,129,287	8.1	90%	89%	100%	97%	101%

Table 5-5 Shipping activities per EMS ships size class for the Rotterdam port area

Ship size in GT	Totals for Rotterdam in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average Speed	Hours	GT.hours	Hours	GT.nm	Average speed
100-1,600	195,244	80,806,744	43,156	101,549,427	7.1	96%	101%	104%	104%	103%
1,600-3,000	19,181	45,945,883	6,802	152,608,139	9.3	109%	109%	116%	119%	101%
3,000-5,000	11,882	47,957,098	9,397	344,674,925	9.6	110%	114%	96%	98%	102%
5,000-10,000	39,116	321,769,571	12,109	891,882,161	9.6	89%	90%	102%	107%	99%
10,000-30,000	72,904	1,219,286,071	15,146	2,442,721,877	9.4	81%	79%	90%	90%	96%
30,000-60,000	54,141	2,361,555,911	6,357	2,334,269,108	8.6	85%	85%	92%	88%	95%
60,000-100,000	46,241	3,833,617,023	4,817	2,788,549,643	7.7	80%	80%	96%	97%	104%
>100,000	65,024	11,644,078,396	4,324	4,799,559,902	6.5	90%	94%	105%	103%	99%
Total / Average	513,605	19,555,443,366	103,644	13,856,129,288	8.2	90%	89%	100%	97%	100%

Table 5-6 Shipping activities per EMS type for the Amsterdam port area

Ship type	Totals for Amsterdam in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
Oil tanker	16,907	725,202,979	781	159,164,774	5.9	68%	71%	74%	81%	105%
Chem.+ Gas tanker	145,015	2,674,493,943	11,513	1,123,551,276	6.3	102%	94%	106%	104%	102%
Bulk carrier	89,579	4,316,883,842	3,761	874,822,942	5.2	74%	73%	68%	67%	95%
Container ship	9,093	58,122,123	1,133	67,950,873	8.5	71%	60%	50%	36%	127%
General Dry Cargo	123,707	580,462,743	8,424	288,821,258	6.8	111%	118%	112%	169%	110%
RoRo Cargo / Vehicle	29,825	1,283,568,918	2,620	594,824,692	6.2	138%	148%	103%	106%	107%
Reefer	16,404	97,311,165	304	8,885,194	5.7	73%	72%	79%	83%	100%
Passenger	19,418	233,582,537	1,391	348,991,448	6.4	79%	73%	100%	118%	107%
Miscellaneous	153,395	225,882,765	8,585	71,783,467	5.7	115%	116%	112%	84%	91%
Tug/Supply	307,345	348,122,407	19,476	57,750,600	6.5	158%	117%	103%	125%	108%
Total / Average	910,688	10,543,633,422	57,988	3,596,546,524	6.3	112%	86%	100%	91%	104%

Table 5-7 Shipping activities per EMS ships size classes for the Amsterdam port area

Ship size in GT	Totals for Amsterdam in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
100-1,600	332,949	118,544,061	22,752	46,119,886	5.9	137%	122%	102%	107%	100%
1,600-3,000	100,611	249,597,477	5,677	94,560,383	6.5	108%	111%	107%	108%	103%
3,000-5,000	68,263	274,780,620	4,830	113,081,914	6.2	120%	123%	96%	94%	103%
5,000-10,000	71,770	520,316,183	4,640	254,875,157	6.8	101%	101%	101%	83%	102%
10,000-30,000	135,701	2,898,399,994	9,055	1,159,978,273	6.3	95%	91%	105%	108%	105%
30,000-60,000	97,767	4,038,851,908	5,509	1,234,686,300	6.1	81%	84%	78%	81%	111%
60,000-100,000	27,653	2,326,149,517	1,242	533,455,142	5.3	77%	76%	75%	79%	104%
>100,000	916	112,728,458	213	158,205,410	4.6	99%	104%	118%	130%	98%
Total / Average	910,687	10,543,633,423	57,990	3,596,546,523	6.2	112%	86%	100%	91%	104%

Table 5-8 Shipping activities per EMS type for the Dutch part of the Ems area

Ship type	Totals for Ems in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
Oil tanker										
Chem.+ Gas tanker	6,624	17,027,554	2,485	386,326,055	9.4	158%	139%	106%	191%	91%
Bulk carrier	2,692	56,530,376	711	113,308,054	9.3	78%	66%	65%	53%	98%
Container ship	1,692	15,063,583	415	60,153,093	11.1	118%	69%	340%	398%	106%
General Dry Cargo	43,920	226,188,703	6,179	277,296,643	9.9	165%	194%	101%	96%	99%
RoRo Cargo / Vehicle	13,957	492,405,862	6,486	1,700,808,092	11.6	173%	272%	89%	115%	98%
Reefer	2,651	7,995,599	108	3,726,895	9.4	194%	132%	113%	139%	101%
Passenger	1,522	159,063,950	1,243	51,629,461	11.9	70%	48%	459%	121%	104%
Miscellaneous	25,263	49,355,410	14,544	272,691,907	8.5	165%	165%	97%	122%	94%
Tug/Supply	109,920	82,298,662	9,824	79,832,536	9.6	129%	79%	115%	85%	109%
Total / Average	208,241	1,105,929,699	41,995	2,945,772,736	9.6	141%	124%	103%	115%	99%

Table 5-9 Shipping activities per EMS ships size classes for the Dutch part of the Ems area

Ship size in GT	Totals for Ems in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
100-1,600	107,052	33,540,876	13,505	54,438,518	10.3	128%	131%	115%	151%	124%
1,600-3,000	41,514	98,749,162	11,437	249,874,954	9.0	156%	156%	82%	89%	100%
3,000-5,000	24,574	98,668,142	8,327	256,233,262	9.3	196%	198%	107%	103%	96%
5,000-10,000	9,620	75,244,122	3,029	256,376,865	10.6	144%	153%	139%	139%	100%
10,000-30,000	7,077	130,543,013	1,976	467,391,866	10.8	95%	95%	84%	86%	98%
30,000-60,000	7,832	388,845,885	1,838	1,064,099,421	9.9	200%	222%	105%	116%	93%
60,000-100,000	2,465	167,750,722	354	287,864,431	8.5	301%	294%	112%	113%	71%
>100,000	620	112,085,410	321	308,555,431	7.1	30%	34%	412%	354%	86%
Total / Average	208,242	1,105,929,699	41,994	2,945,772,735	9.8	141%	124%	103%	115%	105%

Table 5-10 Shipping activities per EMS type for the port area of Den Helder

Ship type	Totals for Den Helder in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
Oil tanker	20	1,334,183	0	107,813	6.0	8%	8%	0%	3%	60%
Chem.+ Gas tanker	741	4,060,174	4	184,313	5.7	124%	108%	100%	109%	121%
Bulk carrier	385	1,720,084	3	1,189,117	33.4	49%	70%	20%	438%	596%
Containership	1	58,249	4	1,652,873	53.6	100%	85%	100%	153%	299%
General Dry Cargo	1,768	1,638,416	82	2,169,967	8.6	68%	32%	35%	36%	109%
RoRo Cargo / Vehicle	6,419	99,086,279	2,045	243,816,639	5.3	100%	100%	85%	80%	65%
Reefer										
Passenger	9,335	92,611,182	1,617	171,205,091	7.3	86%	92%	88%	87%	146%
Miscellaneous	113,430	96,214,573	3,175	18,361,402	6.6	86%	81%	97%	139%	107%
Tug/Supply	116,098	157,624,699	2,979	31,274,247	6.1	91%	96%	94%	90%	95%
Total / Average	248,197	454,347,839	9,909	469,961,462	6.3	88%	89%	91%	84%	97%

Table 5-11 Shipping activities per EMS ships size classes for the port area of Den Helder

Ship size in GT	Totals for Den Helder in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
100-1,600	124,431	50,920,572	2,783	7,540,907	5.6	88%	95%	96%	104%	112%
1,600-3,000	43,506	100,052,276	1,489	22,815,398	7.3	98%	101%	96%	92%	109%
3,000-5,000	19,270	72,906,201	481	10,923,732	5.7	91%	92%	72%	72%	91%
5,000-10,000	2,741	17,690,812	85	4,621,227	20.9	48%	52%	70%	114%	199%
10,000-30,000	14,208	206,967,828	3,584	421,031,840	6.7	94%	92%	86%	84%	92%
30,000-60,000	63	2,705,350	6	1,942,936	23.3	170%	173%	300%	211%	178%
60,000-100,000	21	1,386,435	3	811,121	5.3	10%	10%	30%	20%	93%
>100,000										
Total / Average	248,195	454,322,722	9,911	469,961,462	6.7	88%	89%	91%	84%	103%

Table 5-12 Shipping activities per EMS type for the port area of Harlingen

Ship type	Totals for Harlingen in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.hours	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
Oil tanker										
Chem.+ Gas tanker	3,603	60,365,474	34	1,851,420	6.1	80%	22%	126%	67%	94%
Bulk carrier	184	1,308,016	19	813,423	6.4	57%	56%	56%	70%	102%
Containership	1,447	9,996,918	454	31,258,321	7.3	85%	87%	73%	77%	75%
General Dry Cargo	41,537	111,881,508	1,434	32,518,384	7.9	110%	90%	113%	107%	99%
RoRo Cargo / Vehicle	33,207	93,684,943	10,610	340,455,276	11.5	99%	97%	104%	98%	120%
Reefer	2,696	16,597,097	135	5,743,828	8.0	123%	129%	89%	83%	99%
Passenger	32,914	13,435,133	3,278	39,305,089	11.1	97%	106%	238%	789%	142%
Miscellaneous	76,793	63,868,069	5,337	38,549,850	7.7	103%	105%	72%	98%	106%
Tug/Supply	42,876	29,004,111	1,363	4,791,041	7.3	88%	54%	138%	119%	112%
Total / Average	235,259	400,279,045	22,665	495,932,387	9.9	99%	61%	103%	104%	117%

Table 5-13 Shipping activities per EMS ships size classes for the port area of Harlingen

Ship size in GT	Totals for Harlingen in 2023					2023 as percentage of 2022				
	Berthed		Moving			Berthed		Moving		
	Hours	GT.hours	Hours	GT.hours	Average speed	Hours	GT.hours	Hours	GT.nm	Average speed
100-1,600	138,253	63,452,091	9,372	60,058,737	10.5	106%	101%	106%	167%	144%
1,600-3,000	46,115	111,948,118	5,761	127,022,134	7.6	94%	97%	105%	101%	106%
3,000-5,000	31,529	118,864,637	6,411	258,086,352	8.1	88%	84%	103%	101%	100%
5,000-10,000	8,449	50,679,118	713	42,387,374	8.6	84%	88%	72%	73%	96%
10,000-30,000	271	3,059,266	34	4,005,337	7.8	96%	99%	148%	163%	99%
30,000-60,000										
60,000-100,000										
>100,000	452	51,092,724	4	1,250,944	2.6	19%	19%	44%	55%	113%
Total / Average	235,259	400,276,035	22,665	495,932,387	9.0	99%	61%	103%	104%	118%

5.3 Activities of seagoing vessels in the Netherlands sea area (NCS and 12-mile zone)

The shipping activities in the Netherlands sea area are presented in Table 5-14 and Table 5-15, where the activities of 2023 are compared to the activities of 2022. The tables contain per ship type and size class:

- hours and GT.hours for not moving ships (at anchor), and
- hours, GT.nm and average speed for moving ships.

The average of the total moving hours increased with 3% and GT.nm for moving vessels increased with 5%.

For ships at anchor, there is an decrease for hours by 13% and for GT hours by 42%. In 'Netwerkanalyse Noordzee 2023' [11] where the NCS is monitored annually based on AIS data, a decrease in the number of anchored ships is also observed in most areas.

Table 5-14 Shipping activities per EMS type for the Netherlands Continental Shelf and 12-mile zone

Shiptype	Totals for NCS and 12-mile zone in 2023					2023 as percentage of 2022				
	Not moving / at anchor		Moving			Not moving / at anchor		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average Speed
Oiltanker	93,743	6,280,479,666	84,125	55,342,455,962	9.6	83%	82%	110%	115%	102%
Chem.+Gastanker	418,467	5,792,753,247	317,610	54,122,903,065	10.4	87%	75%	104%	108%	100%
Bulkcarrier	117,871	5,610,468,562	124,235	44,095,513,720	9.7	51%	46%	100%	94%	99%
Containership	61,328	2,979,012,086	193,164	133,513,305,046	12.1	63%	33%	103%	108%	99%
GeneralDryCargo	95,008	574,195,954	392,948	19,044,180,566	10.2	100%	96%	100%	104%	99%
RoRoCargo/Vehicle	16,222	268,527,372	118,779	70,202,285,535	12.1	87%	72%	100%	104%	99%
Reefer	5,547	40,777,131	9,259	1,190,404,403	11.6	127%	154%	97%	116%	101%
Passenger	7,415	2,002,381	11,668	12,569,801,925	11.8	94%	29%	89%	95%	99%
Miscellaneous	72,888	383,813,306	132,908	3,654,595,962	7.8	123%	79%	102%	114%	100%
Tug/Supply	207,892	784,774,692	184,452	2,917,415,976	8.0	130%	103%	116%	88%	107%
Total/Average	1,096,381	22,716,804,397	1,569,148	396,652,862,160	10.1	87%	58%	103%	105%	100%

Table 5-15 Shipping activities per ship size class for the Netherlands Continental Shelf and 12-mile zone

Ship size in GT	Totals for NCS and 12-mile zone in 2023					2023 as percentage of 2022				
	Not moving / at anchor		Moving			Not moving / at anchor		Moving		
	Hours	GT.hours	Hours	GT.nm	Average speed	Hours	GT.hours	Hours	GT.nm	Average Speed
100-1,600	143,558	61,867,113	203,065	744,859,924	7.5	149%	125%	112%	102%	111%
1,600-3,000	119,915	288,244,953	304,288	6,363,558,090	8.6	104%	104%	102%	101%	98%
3,000-5,000	154,002	613,494,194	199,270	7,578,321,029	9.8	91%	90%	95%	94%	98%
5,000-10,000	180,785	1,320,285,036	199,962	16,112,539,091	10.6	112%	113%	102%	100%	100%
10,000-30,000	259,034	4,939,056,028	301,821	67,683,946,363	11.7	83%	81%	105%	103%	98%
30,000-60,000	111,759	4,735,728,046	175,896	91,771,187,027	11.5	56%	55%	105%	106%	101%
60,000-100,000	79,712	6,227,902,961	113,957	100,883,475,893	11.8	60%	58%	102%	103%	105%
>100,000	31,681	4,529,179,529	57,830	105,507,853,885	11.9	44%	40%	110%	112%	102%
Total / Average	1,096,382	22,716,804,398	1,569,151	396,652,862,159	10.2	87%	58%	103%	105%	101%

5.4 Overview of ships in the port areas and in the Netherlands sea area

The average number of ships per day, in the port areas and at sea, are presented in Table 5-16. For the port areas, except for Amsterdam and Ems, most remarkable is the decrease of berthed ships.

For the NCS combined with the 12-miles zone the average number of not moving ships is decreased by 14% and moving ships increased by 3%.

Table 5-16 Average number of ships per day, in distinguished areas, excluding fishing vessels.

Area	In 2023			In 2023 as percentage of 2022		
	Average # ships/day		Speed	Average # ships/day		Speed
	Not moving	Moving	Knots	Not moving	Moving	Knots
Amsterdam	104	7	6	112%	100%	104%
Den Helder	28	1	6	88%	91%	97%
Ems	24	5	10	141%	103%	99%
Harlingen	27	3	10	99%	103%	117%
Rotterdam	58	12	8	90%	100%	101%
Western Scheldt	87	22	10	99%	97%	101%
NCS +12-mile zone	125	179	10	86%	103%	100%

Figure 5-1 shows the average number of ships per day from 2017 up to 2023. The average number of ships per day contains not moving and moving ships excluding fishing vessels. The NCS combined with the 12-miles zone shows a slight increase over time.

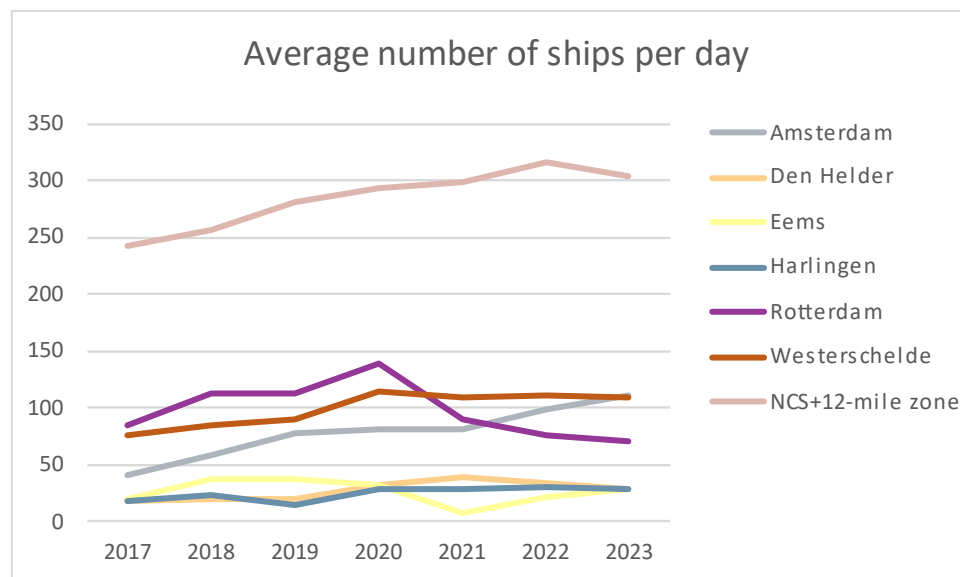


Figure 5-1 Average number of not moving and moving ships per day for 2017 up to 2023, excluding fishing vessels.

6 EMISSIONS FOR THE DUTCH PORT AREAS AND THE NETHERLANDS SEA AREA

6.1 Introduction

This chapter presents the results of emission calculations for 2023 for the Dutch port areas and the Netherlands sea area. To indicate the change in emissions, all values for 2023 are compared with the values of 2022.

The emissions for the port areas are given in Section 6.2, those for the NCS and 12-mile zone in Section 6.3. Section 6.4 presents the spatial distribution of the 2023 NO_x emissions together with the absolute and relative change compared to 2022.

6.2 Emissions in port areas

Table 6-1 contains the emissions for the six Dutch port areas, calculated for ships berthed and sailing within the port areas. Table 6-2 contains the same emissions expressed as a percentage of the corresponding emissions in 2022. The percentages in grey are based on very low absolute numbers and not very reliable. Similar to the procedure in the previous studies, the values for at berth or at anchor include all vessels with speed below 1 knots.

The substance CO₂ has the largest contribution to the total emissions in ton (98%). For all ports together, there is an overall decrease of CO₂ by 15%. This decline is mainly caused by ships at berth as the sailing share in port areas is considerably lower. Ships at berth have a total decrease of CO₂ by 24% and sailing ships increased by 1% (Figure 6-1).

Figure 6-2 and Figure 6-3 show respectively NO_x and SO₂ emissions in ton in each port area from 2017 up to 2023. The emissions in ton contains not moving and moving ships excluding fishing vessels. For all ports together NO_x and SO₂ emissions decreased.

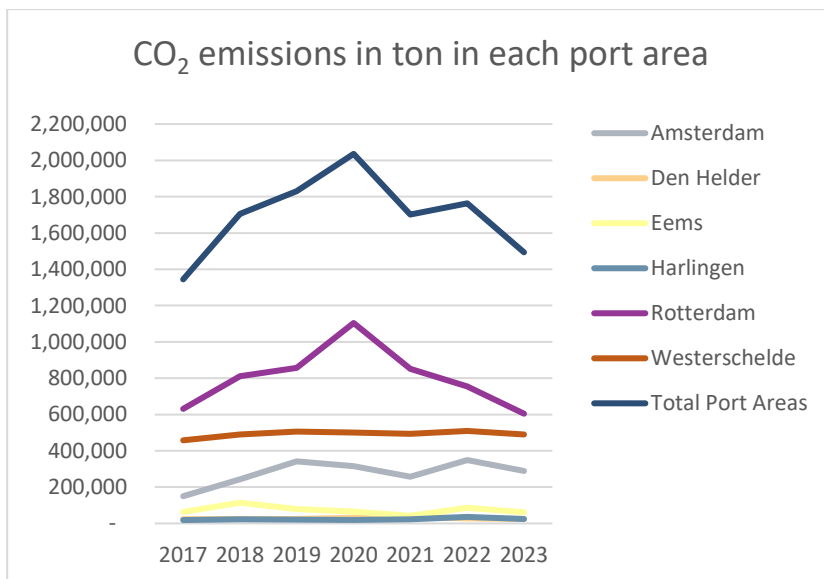


Figure 6-1 CO₂ emissions in ton in each port area for 2017-2023, excluding fishing vessels.

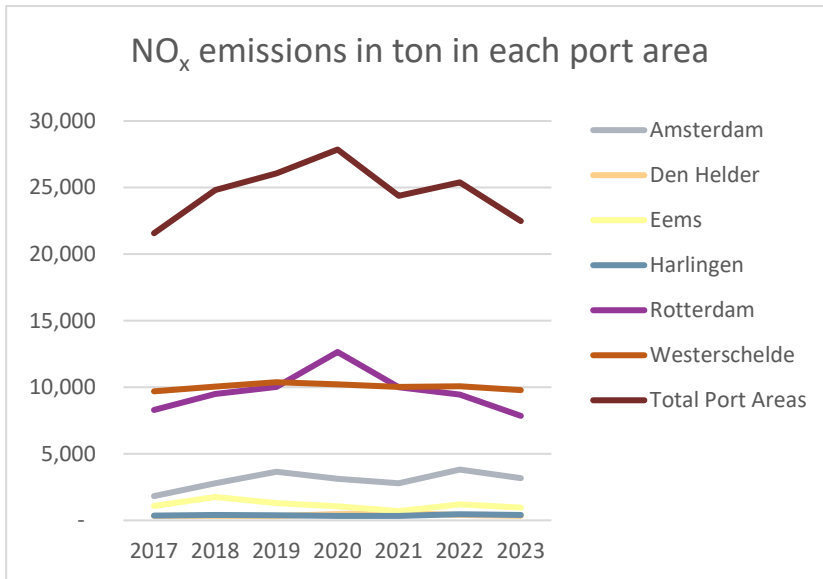


Figure 6-2 NO_x emissions in ton in each port area for 2017-2023, excluding fishing vessels.

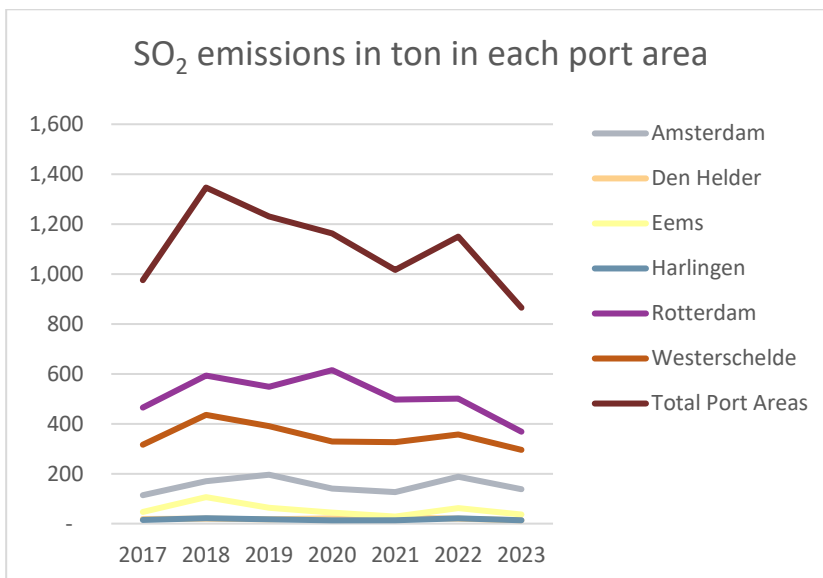


Figure 6-3 SO₂ emissions in ton in each port area for 2017-2023, excluding fishing vessels.

Table 6-1 Total emissions in ton in each port area for 2023, excluding fishing vessels (EMS-type 11)

Substance	Source	Western Scheldt	Rotterdam	Amsterdam	Ems	Den Helder	Harlingen	Total
1011 Methane	Berthed							
	Sailing	58	53	5	34	42	21	213
	Total	58	53	5	34	42	21	213
1237 VOC	Berthed	57	200	100	8	7	4	377
	Sailing	252	109	36	22	4	9	432
	Total	309	309	136	30	11	13	809
4001 SO ₂	Berthed	65	277	111	11	8	5	477
	Sailing	230	91	27	26	5	9	388
	Total	296	368	137	36	14	14	865
4013 NO _x	Berthed	1,474	4,894	2,308	219	202	131	9,228
	Sailing	8,302	2,956	856	735	133	268	13,250
	Total	9,775	7,851	3,165	954	335	399	22,479
4031 CO	Berthed	94	351	174	13	11	7	650
	Sailing	523	249	79	56	20	20	947
	Total	617	600	253	69	31	26	1,597
4032 CO ₂	Berthed	125,419	456,162	245,931	17,110	13,209	8,578	866,409
	Sailing	364,151	148,328	43,079	43,914	11,422	15,950	626,843
	Total	489,570	604,490	289,010	61,024	24,630	24,528	1,493,252
6601 Aerosols MDO	Berthed	27	104	49	4	3	2	189
	Sailing	34	19	8	6	1	5	73
	Total	61	123	56	10	4	7	262
6602 Aerosols HFO	Berthed	1	0	1	0	1	0	2
	Sailing	162	67	16	17	4	2	268
	Total	163	67	17	17	5	2	270

Table 6-2 Emissions in each port area for 2023 as percentage of the emissions in 2022, excluding fishing vessels (EMS-type 11).

Substance	Source	Western Scheldt	Rotterdam	Amsterdam	Ems	Den Helder	Harlingen	Total
1011 Methane	Berthed							
	Sailing	131%	125%	224%	129%	346%	80%	139%
	Total	131%	125%	224%	129%	346%	80%	139%
1237 VOC	Berthed	79%	76%	79%	38%	69%	39%	74%
	Sailing	97%	89%	81%	93%	72%	110%	93%
	Total	93%	80%	80%	67%	70%	70%	83%
4001 SO ₂	Berthed	71%	71%	72%	31%	63%	39%	69%
	Sailing	87%	82%	77%	93%	79%	104%	85%
	Total	83%	74%	73%	58%	68%	64%	75%
4013 NO _x	Berthed	81%	77%	81%	43%	77%	52%	77%
	Sailing	101%	95%	89%	108%	91%	129%	99%
	Total	97%	83%	83%	80%	82%	86%	89%
4031 CO	Berthed	80%	76%	80%	36%	70%	38%	75%
	Sailing	103%	97%	88%	106%	138%	92%	100%
	Total	99%	83%	82%	78%	103%	67%	88%
4032 CO ₂	Berthed	84%	76%	81%	36%	71%	37%	76%
	Sailing	101%	97%	93%	113%	120%	127%	101%
	Total	96%	80%	83%	71%	88%	68%	85%
6601 Aerosols MDO	Berthed	76%	76%	79%	35%	67%	41%	74%
	Sailing	84%	84%	83%	105%	65%	108%	86%
	Total	80%	77%	80%	60%	66%	70%	77%
6602 Aerosols HFO	Berthed	159%	14%	39%	30%	65%	287%	56%
	Sailing	95%	92%	85%	95%	111%	166%	94%
	Total	95%	91%	81%	94%	102%	167%	94%

6.3 Emissions in the Netherlands sea area (NCS and 12-mile zone)

The emissions in the NCS and the 12-mile zone are calculated for moving and non-moving ships. Ships are counted as non-moving when the speed is less than 1 knot, just like in the previous studies. Mostly, this concerns ships at anchor in one of the anchorage areas. However, some ships may have such a low speed for a while when waiting for something (for a pilot, for permission to enter a port or for another reason). Based on the observed speed in AIS, the emission has been calculated for the main engine and for the auxiliary engines.

The calculated emissions for 2023 are summarised in Table 6-3. This table also contains a comparison with 2022. The percentages in grey are based on very low absolute numbers and not very reliable.

The substance CO₂ has the largest contribution to the total emissions in ton (98%). For NCS combined with the 12-miles zone there is a total decrease of CO₂ emission by 1%. This is due to 28% decrease for ships at anchor and 2% increase for sailing ships. For the Netherlands sea area the average number of ships decreased by 4%.

Figure 6-4 shows CO₂, NO_x and SO₂ emissions in ton in the Netherlands sea area from 2010 up to 2023. The total emissions in ton contains not moving and moving ships excluding fishing vessels. SO₂ emissions decreased since the previous registration, but is low in absolute terms. NO_x remains approximately at the same level.

Table 6-3 Emissions of ships in ton in the Netherlands sea area for 2023 compared with 2022, excluding fishing vessels (EMS-type 11).

No	Substance	Emission in ton in 2023			Emission in 2023 as percentage of 2022		
		Not moving	Moving	Total	Not moving	Moving	Total
1011	Methane		1,143	1,143		97%	97%
1237	VOC	101	2,065	2,166	66%	96%	94%
4001	SO ₂	145	2,090	2,235	64%	87%	85%
4013	NO _x	3,159	73,969	77,127	69%	100%	99%
4031	CO	202	4,532	4,734	73%	101%	100%
4032	CO ₂	220,556	3,391,732	3,612,288	72%	102%	99%
6601	Aerosols MDO	79	238	317	66%	88%	81%
6602	Aerosols HFO	7	1,625	1,632	124%	95%	95%
Average number of ships present in the area		125	179	303	86%	103%	96%

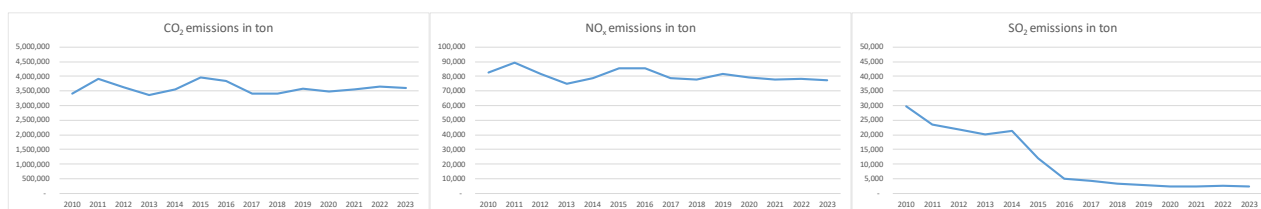


Figure 6-4 CO₂, NO_x and SO₂ emissions in ton in the Netherlands sea area for 2010-2023, excluding fishing vessels.

6.4 Spatial distribution of the emissions

Because of the strong relation between shipping routes and location of the emissions, all substances show more or less the same spatial distribution. Therefore, only the spatial distribution of NO_x is presented for the six Dutch port areas and the Netherlands sea area in Figure 6-5 up to Figure 6-25.

Three figures are presented for each area. The first figure represents the total emission (emissions of auxiliary and main engine of moving and not moving ships together) expressed as NO_x in ton/km². The second one shows the *absolute* change in emission between 2022 and 2023 and the third one shows the *relative* change in emission between 2022 and 2023. To make a comparison between areas easier, the same colour table has been used for all areas. Only for the NCS, a different scale has been used to illustrate the absolute difference. This is necessary because at the NCS differences are more smoothed due to the larger grid cells, these are 25 km² instead of 0.25 km² as used in the port areas.

In the figures, large differences between 2022 and 2023 are visualized by darker colours. Absolute differences are often larger at locations with high traffic intensity, while relative differences are often larger at locations with low traffic intensity. This has to be kept in mind when interpreting the figures.

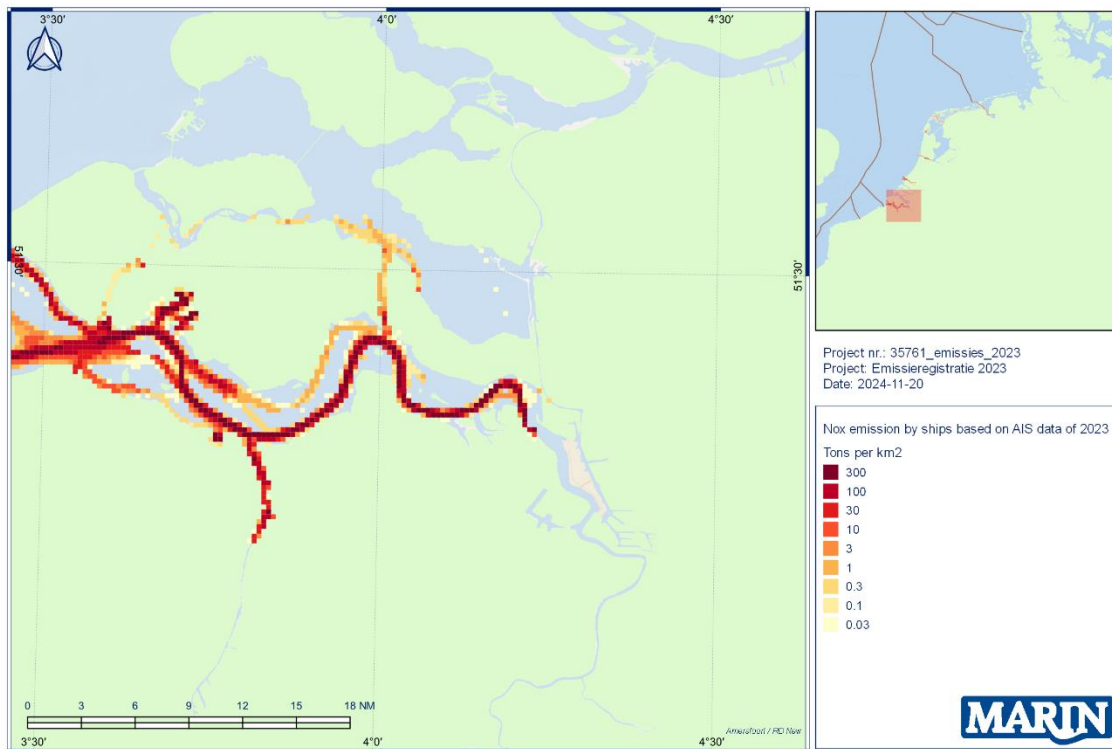


Figure 6-5 *NO_x emission in 2023 in the Dutch part of the Western Scheldt by ships with AIS.*

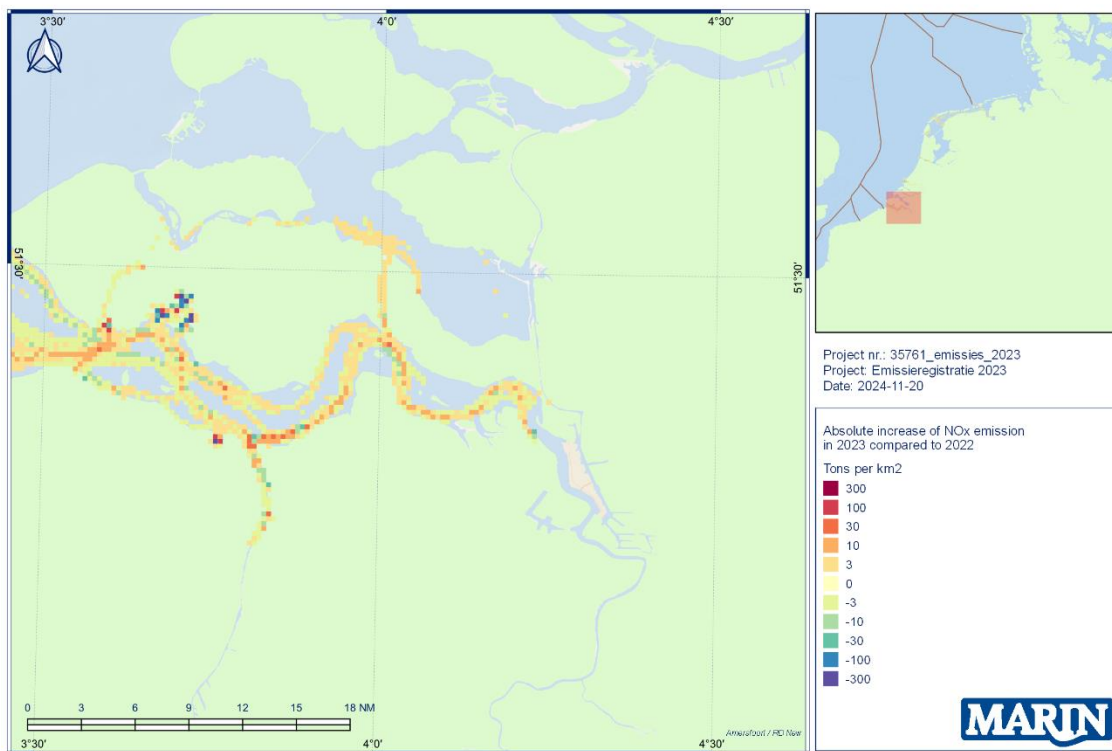


Figure 6-6 *Absolute change in NO_x emission from 2022 to 2023 in the Dutch part of the Western Scheldt by ships with AIS.*

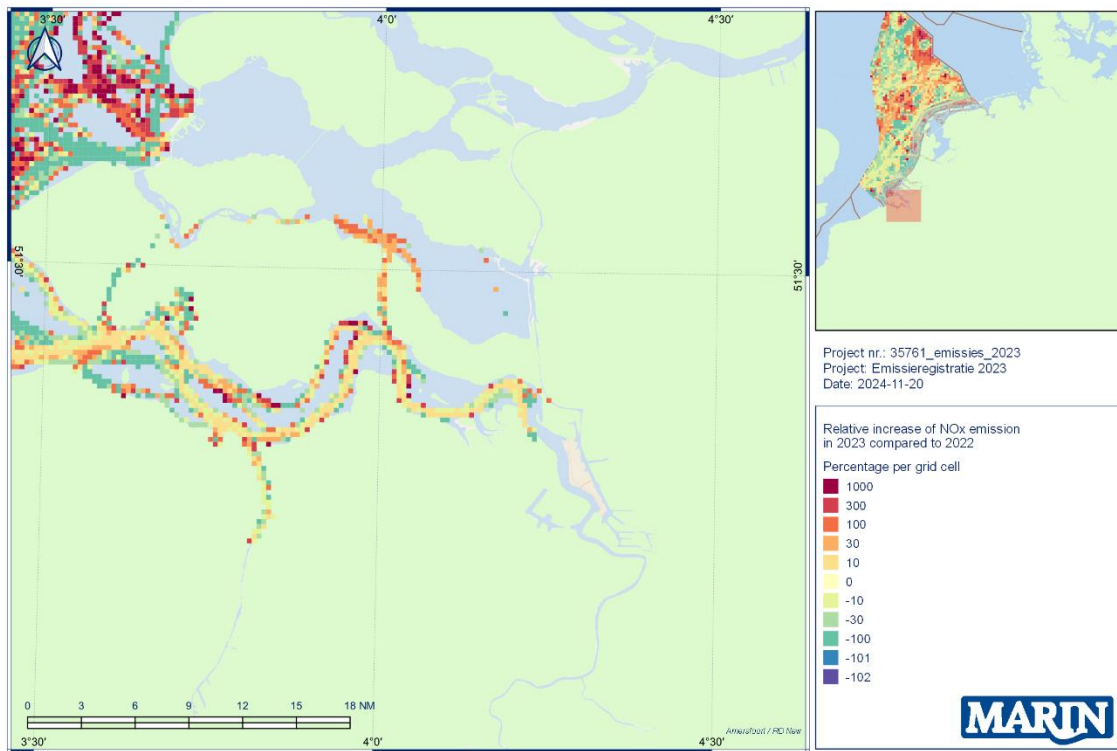


Figure 6-7 Relative change in NO_x emission from 2022 to 2023 in the Dutch part of the Western Scheldt by ships with AIS.

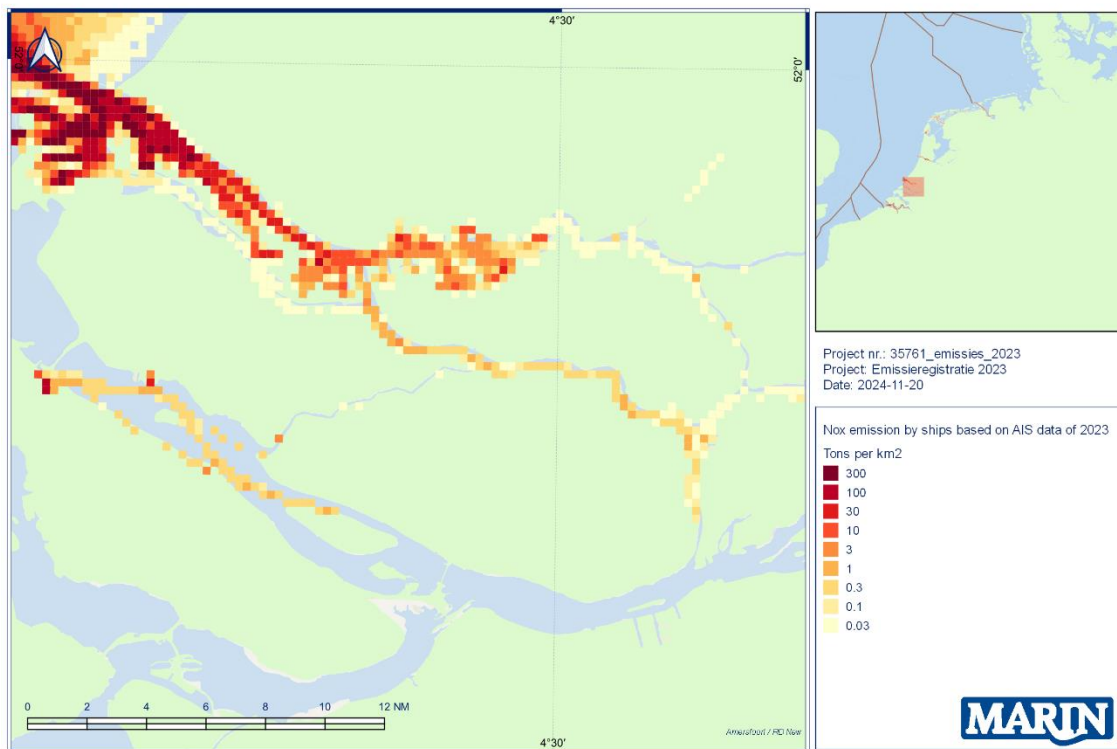


Figure 6-8 NO_x emission in 2023 in the port area of Rotterdam by ships with AIS.

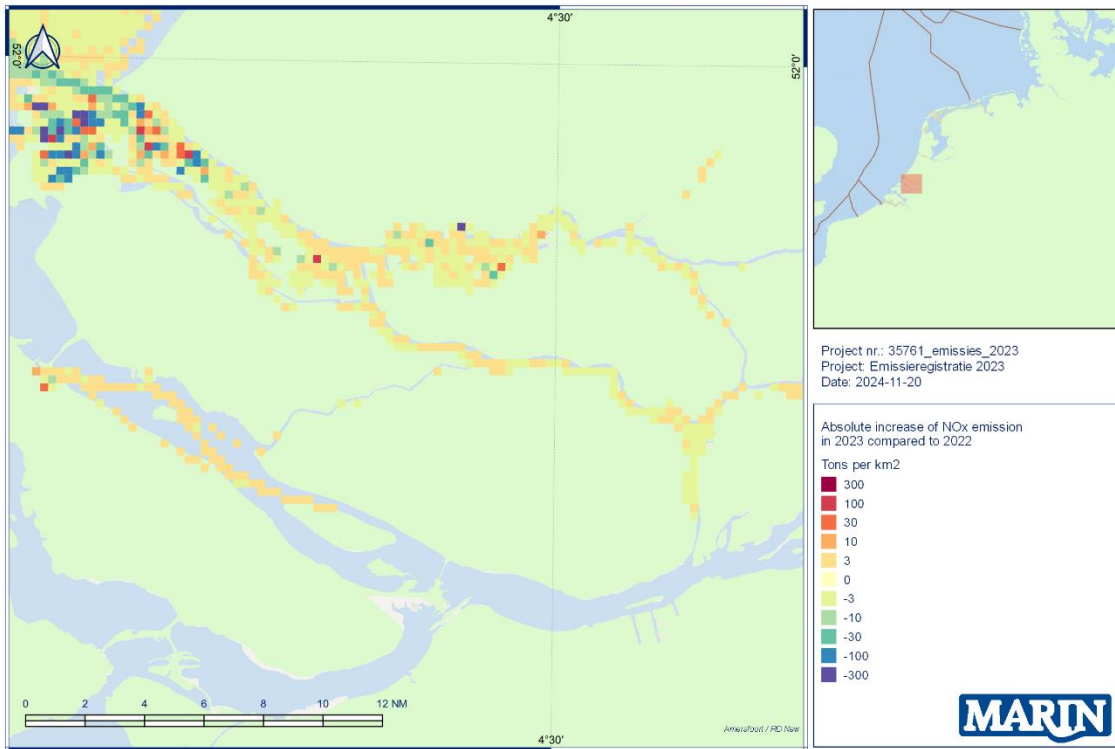


Figure 6-9 Absolute change in NO_x emission from 2022 to 2023 in the port area of Rotterdam by ships with AIS.

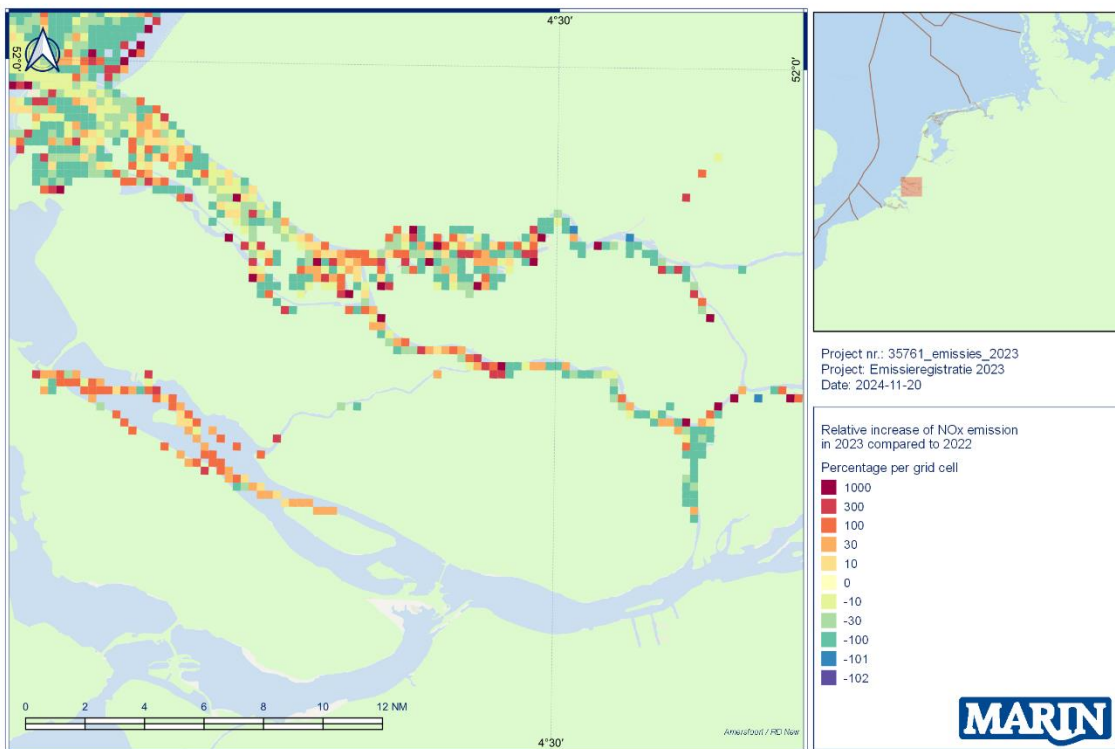


Figure 6-10 Relative change in NO_x emission from 2022 to 2023 in the port area of Rotterdam by ships with AIS.

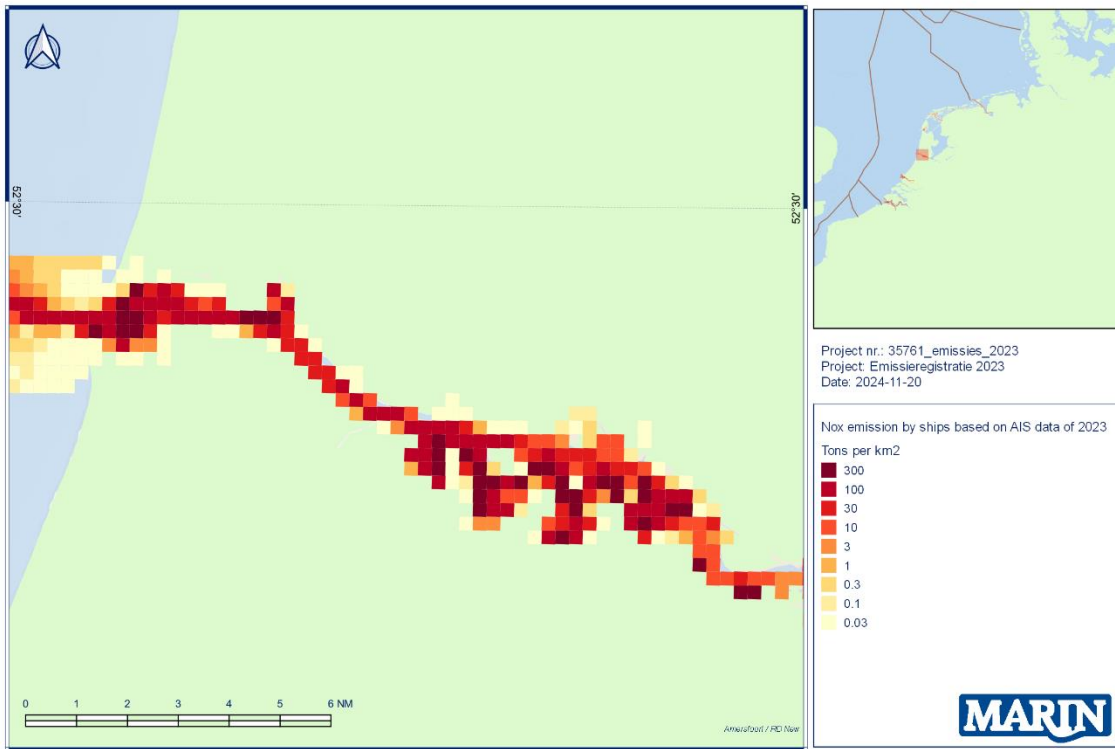


Figure 6-11 NO_x emission in 2023 in the port area of Amsterdam by ships with AIS.

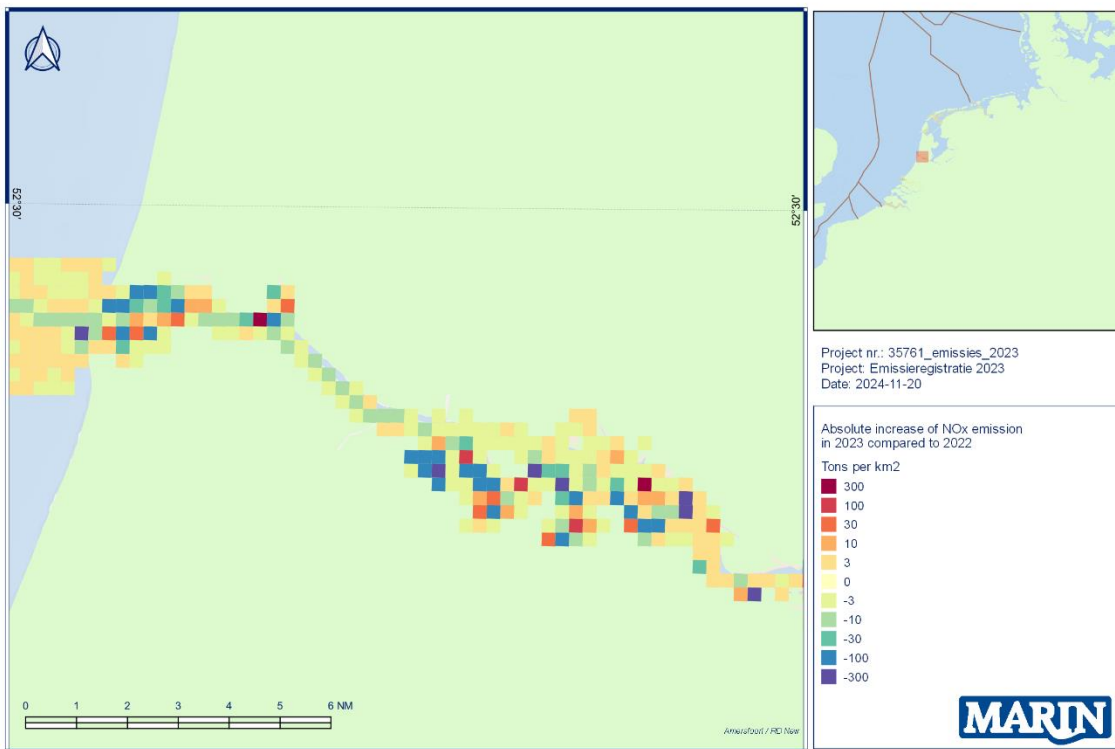


Figure 6-12 Absolute change in NO_x emission from 2022 to 2023 in the port area of Amsterdam by ships with AIS.

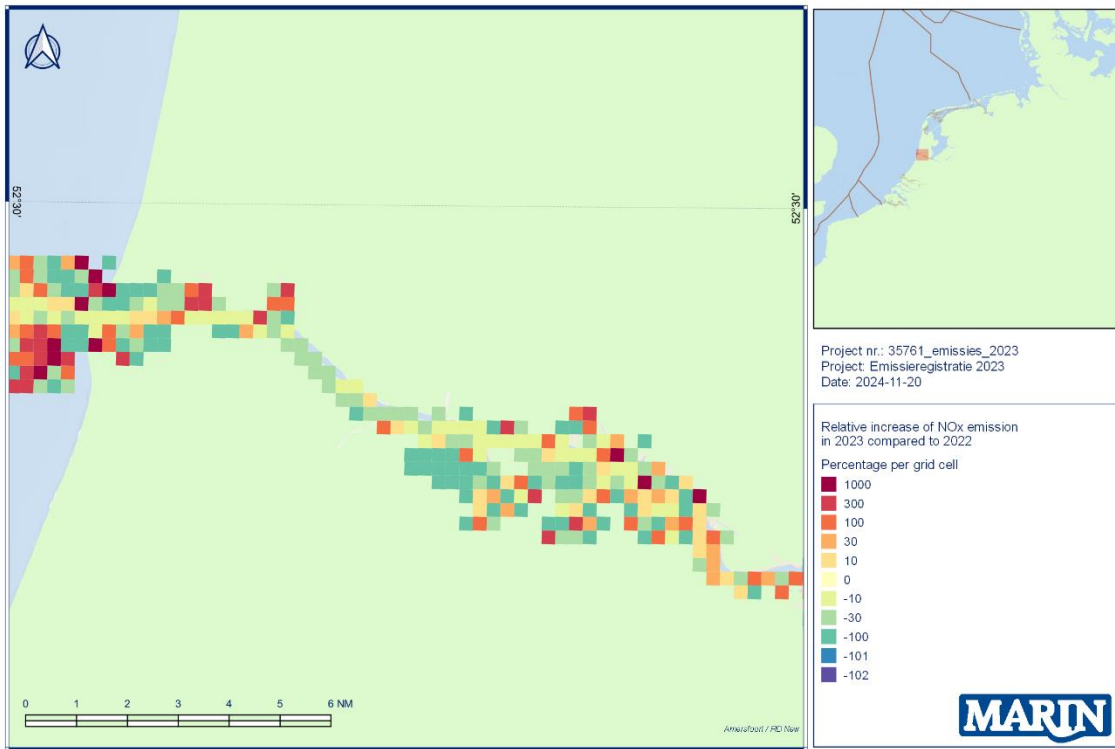


Figure 6-13 Relative change in NO_x emission from 2022 to 2023 in the port area of Amsterdam by ships with AIS.

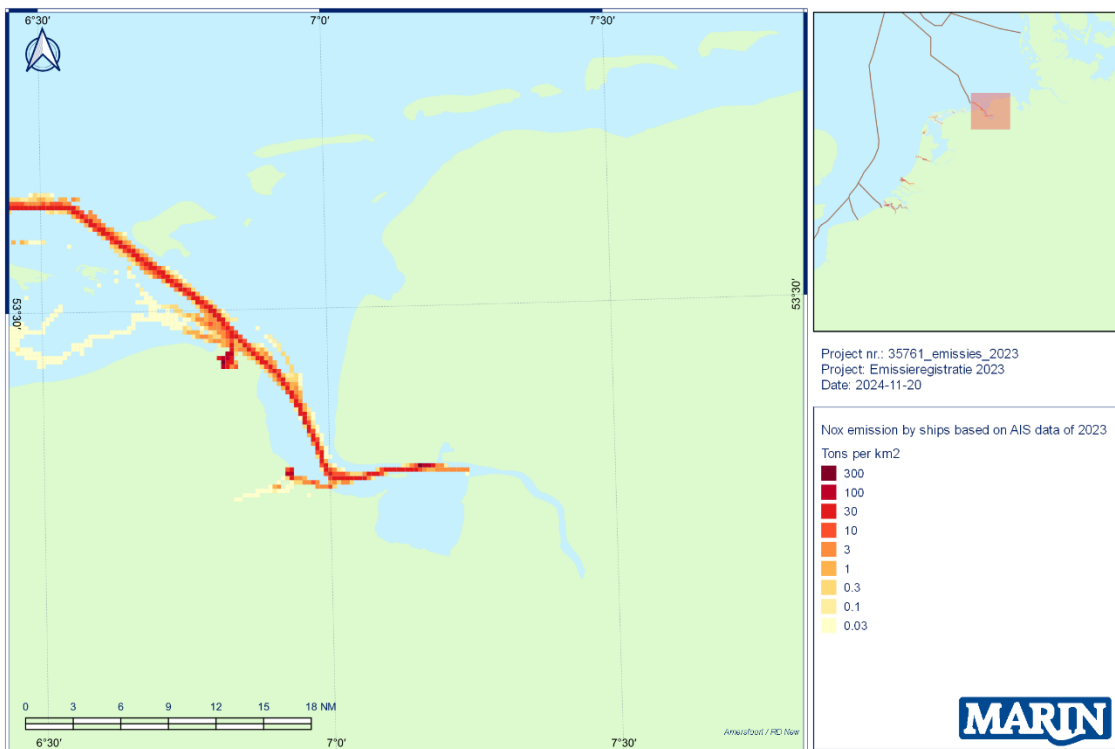


Figure 6-14 NO_x emission in 2023 in the Ems area by ships with AIS.

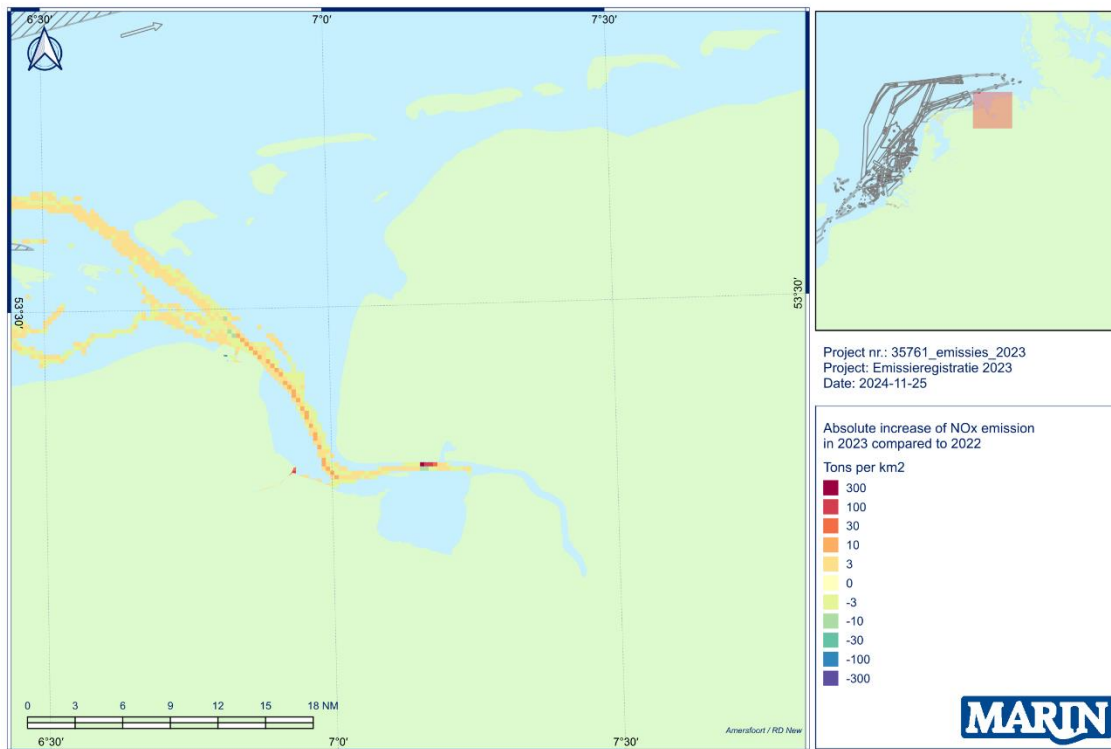


Figure 6-15 Absolute change in NO_x emission from 2022 to 2023 in the Ems area by ships with AIS.

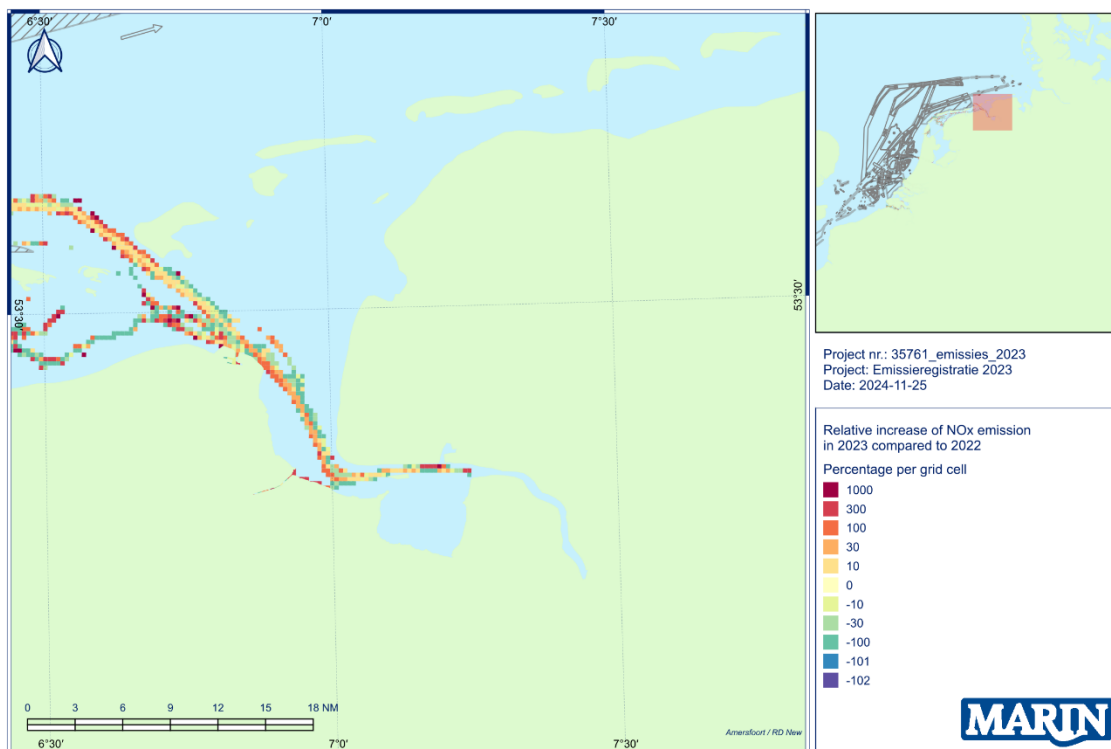


Figure 6-16 Relative change in NO_x emission from 2022 to 2023 in the Ems area by ships with AIS.

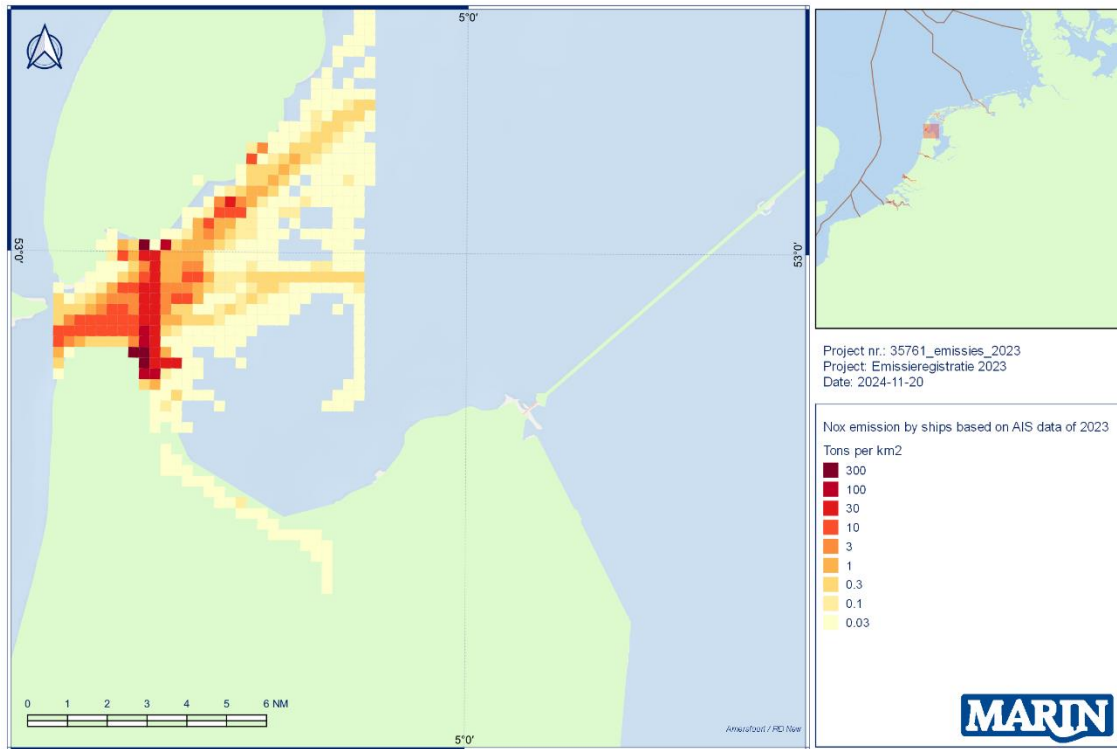


Figure 6-17 NO_x emission in 2023 in the port area of Den Helder by ships with AIS.

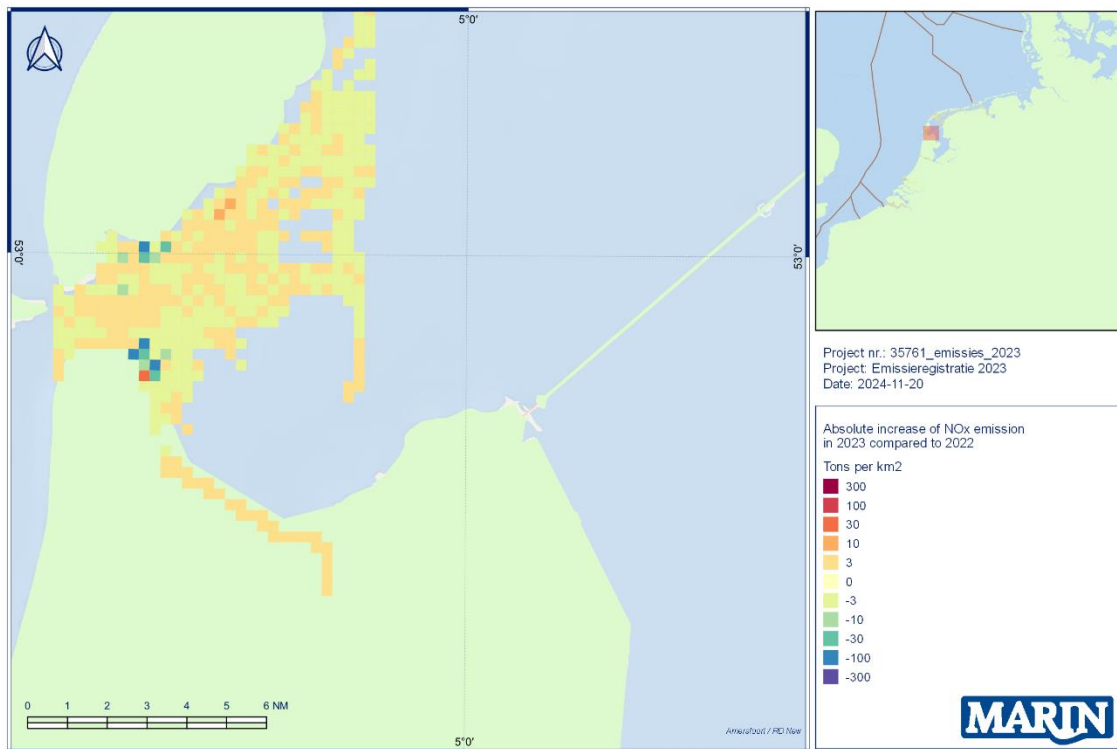


Figure 6-18 Absolute change in NO_x emission from 2022 to 2023 in the port area of Den Helder by ships with AIS.

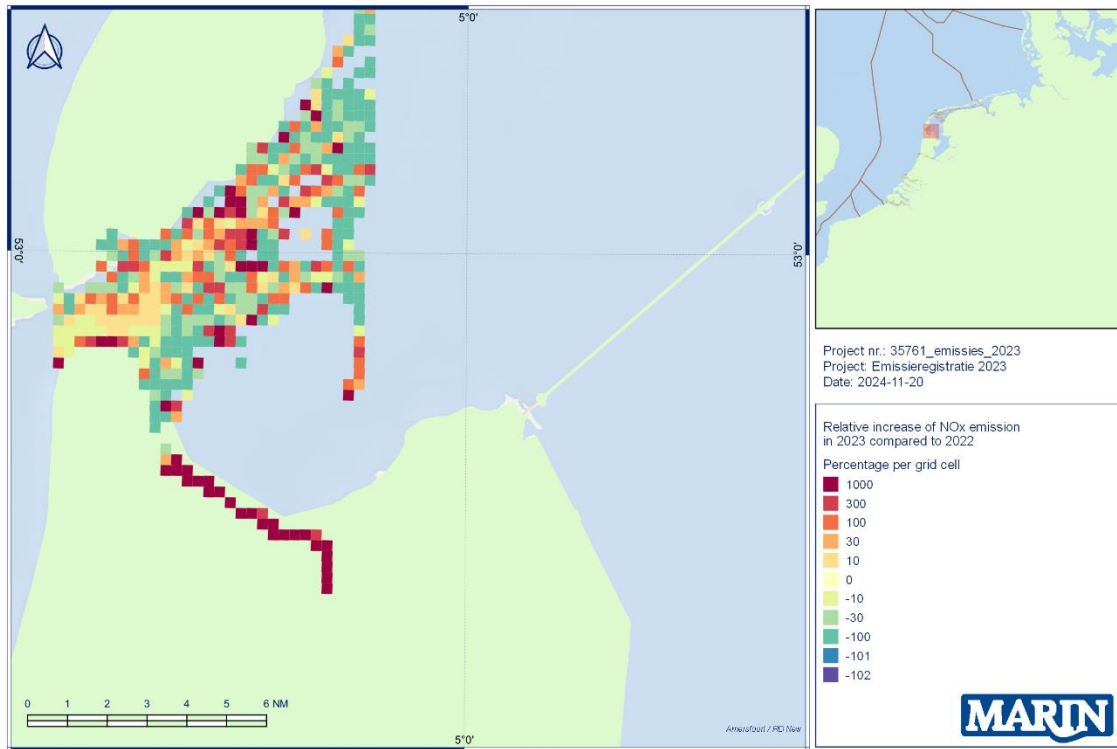


Figure 6-19 Relative change in NO_x emission from 2022 to 2023 in the port area of Den Helder by ships with AIS.

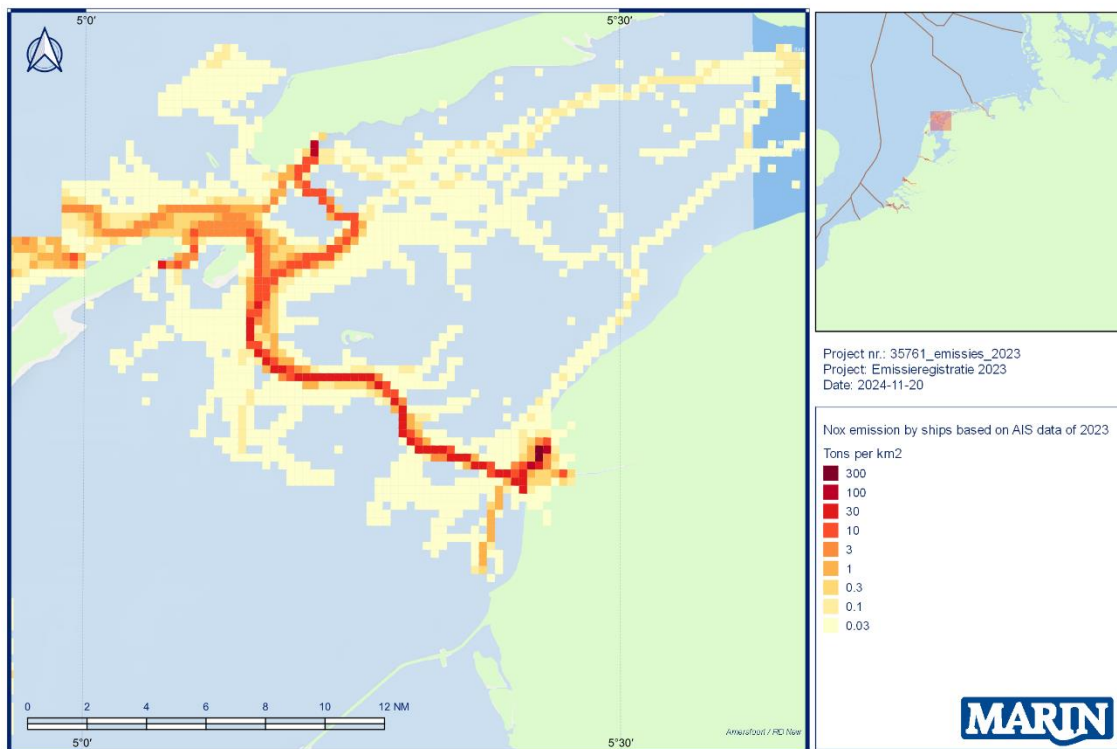


Figure 6-20 NO_x emission in 2023 in the port area of Harlingen by ships with AIS.

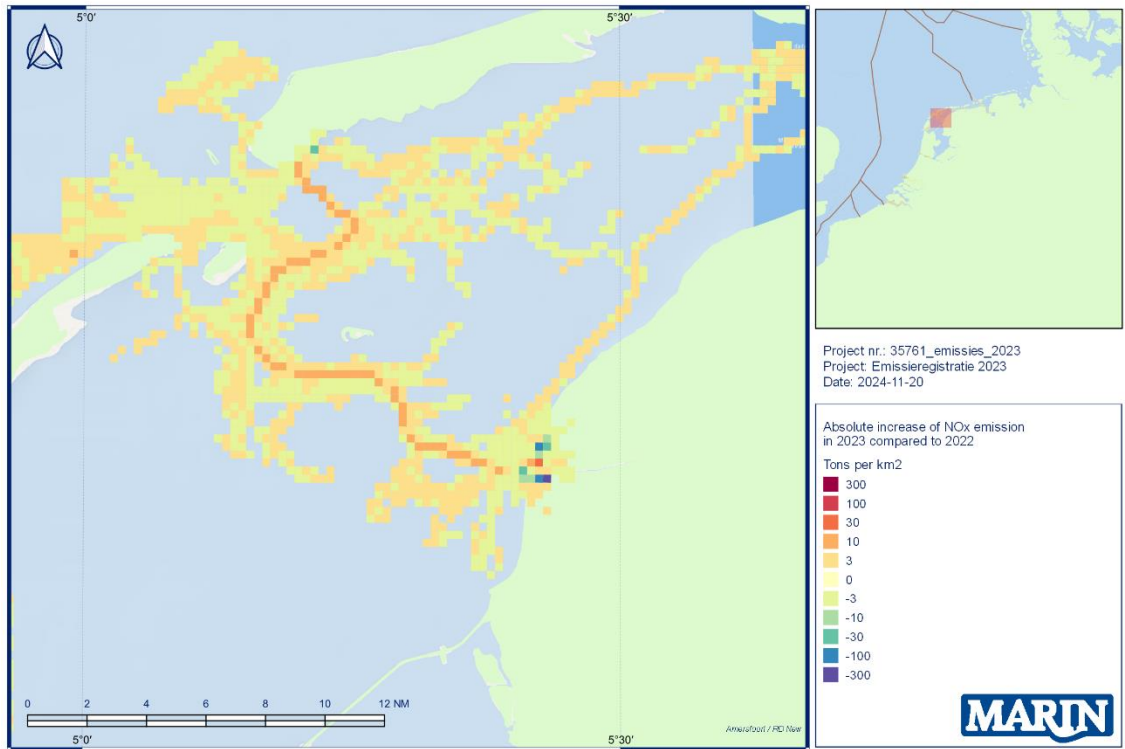


Figure 6-21 Absolute change in NO_x emission from 2022 to 2023 in the port area of Harlingen by ships with AIS.

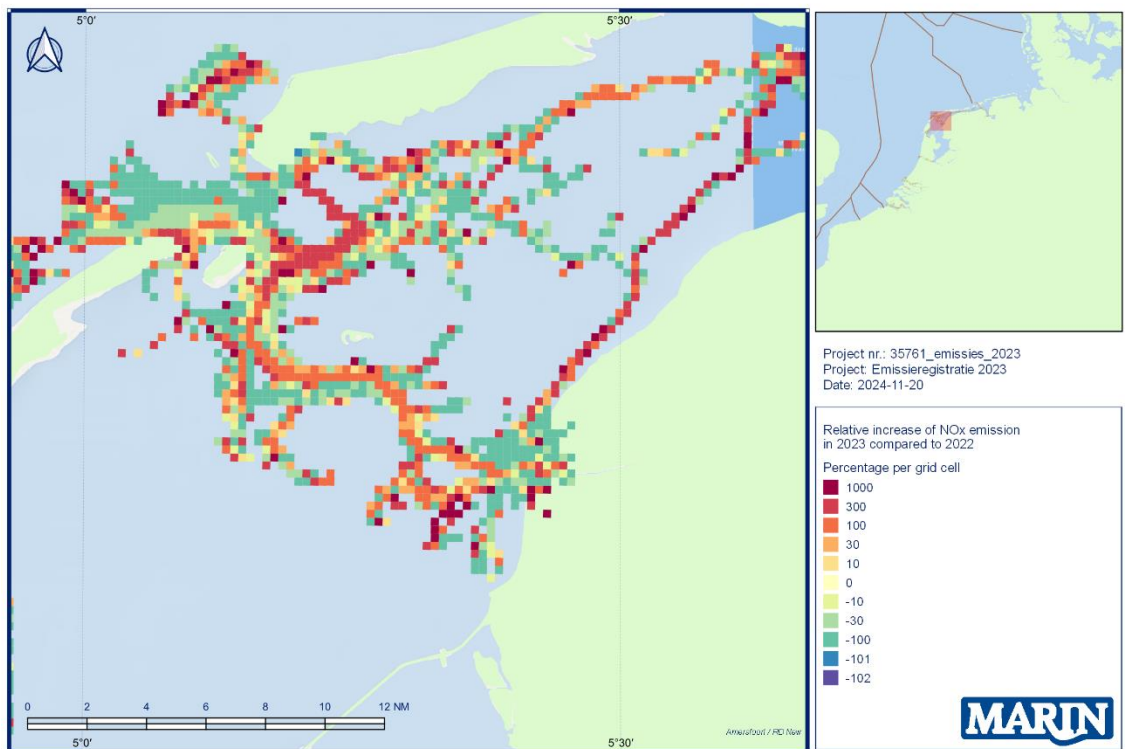


Figure 6-22 Relative change in NO_x emission from 2022 to 2023 in the port area of Harlingen by ships with AIS.

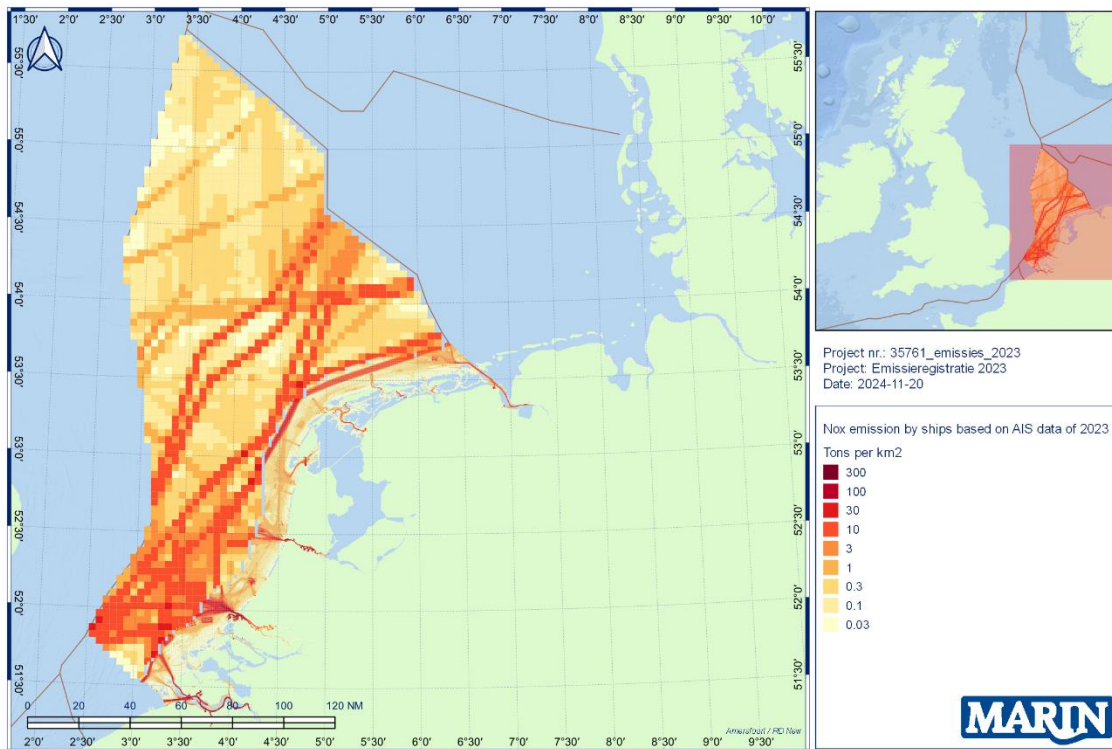


Figure 6-23 *NO_x emission in 2023 in the NCS, the 12-mile zone and the Dutch port areas by ships with AIS.*

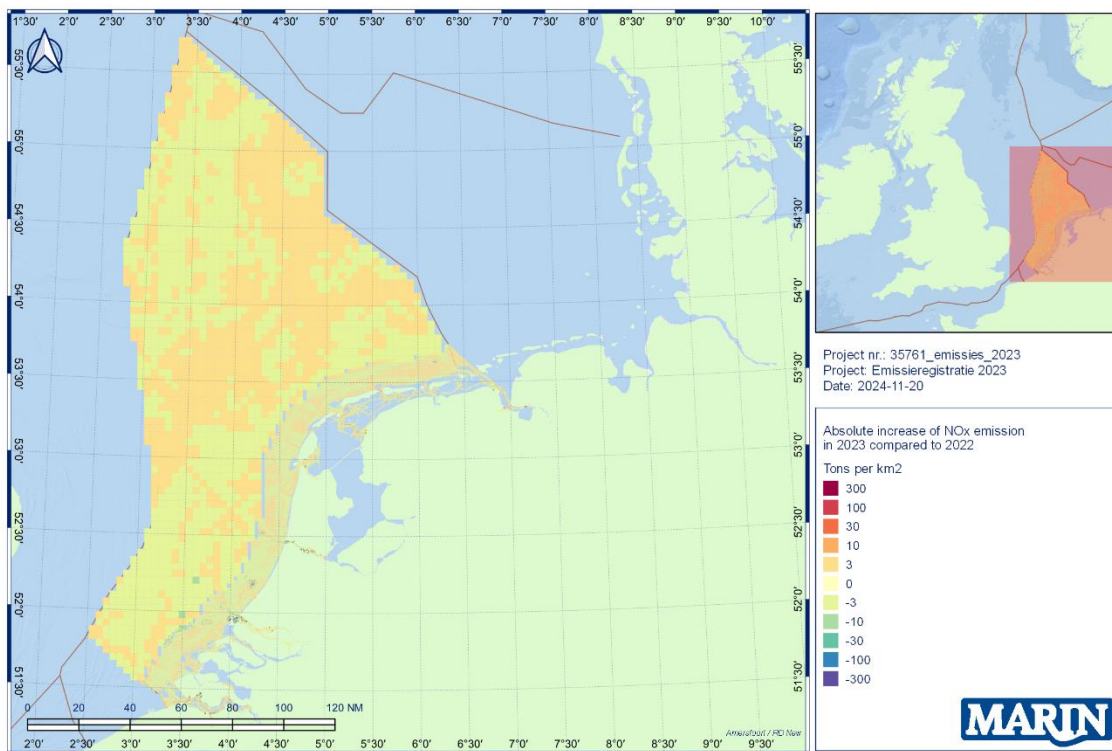


Figure 6-24 *Absolute change in NO_x emission from 2022 to 2023 in the NCS, the 12-mile zone and in the Dutch port areas by ships with AIS.*

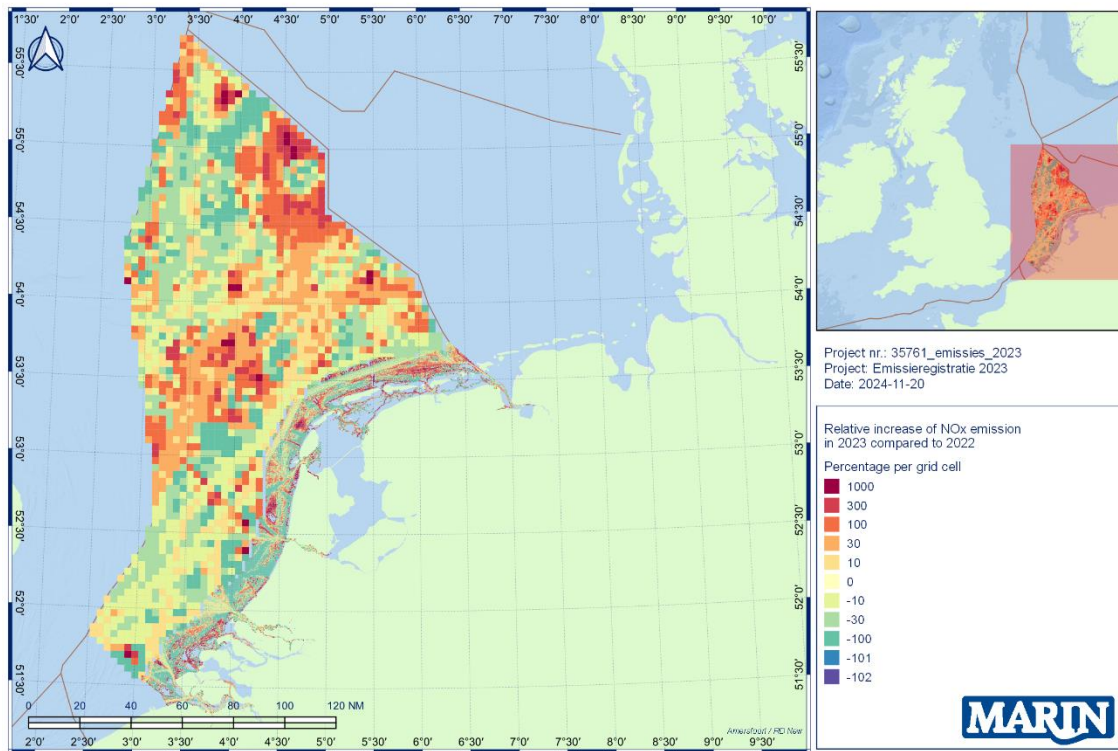


Figure 6-25 Relative change in NO_x emission from 2022 to 2023 in the NCS, the 12-mile zone and in the Dutch port areas by ships with AIS.

7 EMISSIONS FOR THE FISHING ACTIVITIES IN THE DUTCH PORT AREAS, THE WADDEN SEA AND THE NETHERLANDS SEA AREA

7.1 Introduction

This chapter presents the results of the emission calculations for 2023 for the fishing activities in the Dutch port areas, the Wadden Sea and the Netherlands sea area. Its method is explained by TNO in reference [3] and in Appendix A3.

7.2 Emissions of fishing vessels (EMS type 11)

In Table 7-1, the total emissions of fishing vessels are given in ton for each port area and the Wadden Sea. Table 7-2 presents the trend in percentages compared with the results of 2022. Table 7-3 gives the total emissions of fishing vessels for the 12 miles zone and the NCP and Table 7-4 presents the trend in percentages compared with 2022.

The percentages in grey are based on very low absolute numbers and not very reliable.

Figure 7-1 up to Figure 7-6 present the spatial distribution of CO₂ for the NCS and the Dutch Wadden Sea. This substance is most emitted by fishing vessels.

It is clear from both the table and the figures that the absolute contribution of CO₂ emissions by fishing vessels is largest in Harlingen, Western Scheldt and Amsterdam. Compared to the previous year there is a clear increase of CO₂ emissions in the port of Wester Scheldt (9%) and Amsterdam (3%). In Harlingen there is a decrease of CO₂ emissions by 6%. For all ports together the CO₂ emissions have been decreased by 8%.

For the NCP and the 12-miles zone, the CO₂ emissions by fishing vessels remains approximately the same, but there is less fishing activity within the 12 mile zone and an increase in fishing activity outside. In 'Netwerkanalyse Noordzee 2023' [11] where the NCS is monitored annually based on AIS data, this shift is also observed. A decrease in fishing traffic along the coast, but an increase further from the coast (see Figure 7-7).

Table 7-1 Total emissions in ton in each port area for 2023, fishing vessels including trawlers

Substance	Source	Western Scheldt	Rotterdam	Amsterdam	Ems	Den Helder	Harlingen	Wadden	Total
1237 VOC	Berthed	6	2	6	1	1	5	0	20
	Sailing	1	0	1	1	1	4	1	9
	Total	7	2	7	1	2	9	1	29
4001 SO ₂	Berthed	6	2	7	1	1	5	0	22
	Sailing	1	0	1	1	1	4	1	8
	Total	7	2	7	1	2	9	1	31
4013 NO _x	Berthed	153	51	179	19	32	132	4	569
	Sailing	33	2	16	14	21	103	28	218
	Total	186	53	195	33	53	235	32	787
4031 CO	Berthed	7	2	8	1	1	6	0	25
	Sailing	1	0	1	1	1	5	1	10
	Total	8	2	9	1	2	10	2	35
4032 CO ₂	Berthed	10,676	3,823	10,855	1,405	2,360	9,478	297	38,895
	Sailing	2,332	129	1,027	1,037	1,554	7,181	2,054	15,313
	Total	13,008	3,953	11,882	2,441	3,914	16,659	2,350	54,208
6598 Aerosols MDO/HFO	Berthed	4	1	2	0	1	4	0	12
	Sailing	1	0	0	0	1	3	1	6
	Total	5	1	2	1	1	7	1	18

Table 7-2 Emissions in each port area for 2023 as percentage of the emissions in 2022, fishing vessels including trawlers

Substance	Source	Western Scheldt	Rotterdam	Amsterdam	Ems	Den Helder	Harlingen	Wadden	Total
1237 VOC	Berthed	96%	69%	95%	101%	39%	79%	72%	82%
	Sailing	77%	65%	84%	63%	45%	90%	76%	76%
	Total	92%	69%	93%	78%	41%	84%	75%	80%
4001 SO ₂	Berthed	100%	72%	93%	118%	46%	78%	77%	84%
	Sailing	70%	66%	80%	65%	44%	84%	81%	73%
	Total	94%	72%	92%	87%	46%	80%	81%	81%
4013 NO _x	Berthed	110%	81%	107%	128%	49%	89%	86%	95%
	Sailing	88%	75%	95%	72%	51%	102%	85%	86%
	Total	105%	81%	106%	95%	50%	94%	85%	92%
4031 CO	Berthed	97%	70%	96%	102%	39%	76%	72%	82%
	Sailing	72%	66%	86%	58%	42%	84%	74%	72%
	Total	91%	70%	95%	76%	40%	80%	74%	79%
4032 CO ₂	Berthed	114%	82%	104%	131%	51%	89%	84%	95%
	Sailing	92%	77%	96%	72%	55%	100%	88%	87%
	Total	109%	81%	103%	97%	53%	94%	88%	92%
6598 Aerosols MDO/HFO	Berthed	91%	66%	65%	99%	38%	71%	62%	71%
	Sailing	84%	66%	79%	60%	52%	89%	83%	79%
	Total	90%	66%	66%	76%	43%	78%	80%	73%

Table 7-3 Total emissions in ton in the 12 mile zone and the NCP for 2023, fishing vessels including trawlers

Substance	Source	12 Miles	NCP	Total
1237 VOC	Berthed	2	1	2
	Sailing	12	50	62
	Total	14	51	65
4001 SO ₂	Berthed	2	1	2
	Sailing	13	47	60
	Total	14	48	62
4013 NO _x	Berthed	45	19	63
	Sailing	311	1,294	1,604
	Total	355	1,312	1,667
4031 CO	Berthed	2	1	3
	Sailing	15	64	79
	Total	17	64	81
4032 CO ₂	Berthed	2,482	1,103	3,585
	Sailing	21,643	85,436	107,079
	Total	24,125	86,539	110,664
6598 Aerosols MDO/HFO	Berthed	0	0	1
	Sailing	8	31	39
	Total	9	31	40

Table 7-4 Emissions in 12 miles and NCP for 2023 as percentage of the emissions in 2022, fishing vessels including trawlers

Substance	Source	12 Miles	NCP	Total
1237 VOC	Berthed	53%	135%	67%
	Sailing	65%	107%	95%
	Total	63%	107%	93%
4001 SO ₂	Berthed	53%	103%	61%
	Sailing	65%	96%	87%
	Total	63%	96%	86%
4013 NO _x	Berthed	59%	126%	70%
	Sailing	71%	115%	102%
	Total	69%	115%	101%
4031 CO	Berthed	50%	123%	62%
	Sailing	65%	110%	97%
	Total	63%	110%	95%
4032 CO ₂	Berthed	59%	124%	70%
	Sailing	71%	112%	100%
	Total	70%	112%	99%
6598 Aerosols MDO/HFO	Berthed	51%	155%	79%
	Sailing	61%	97%	86%
	Total	60%	97%	86%

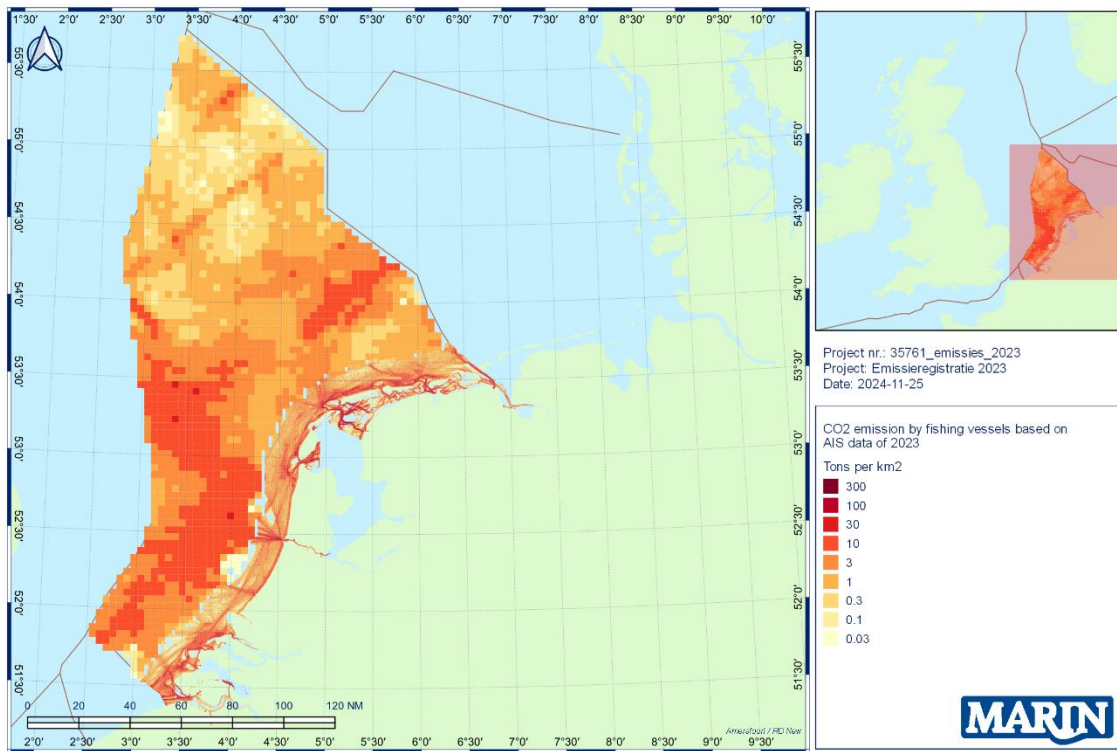


Figure 7-1 CO₂ emission observed in the NCS, fishing vessels including trawlers, based on AIS data of 2023

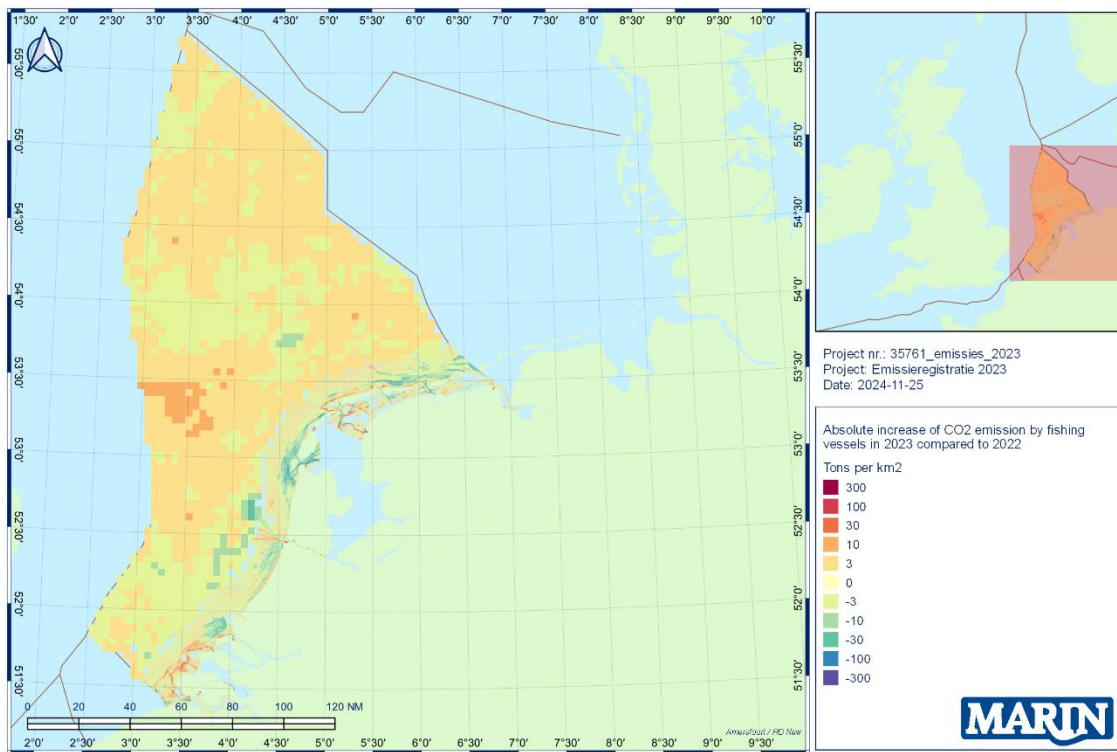


Figure 7-2 Absolute change in CO₂ emission from 2022 to 2023 observed in the NCS, fishing vessels including trawlers.

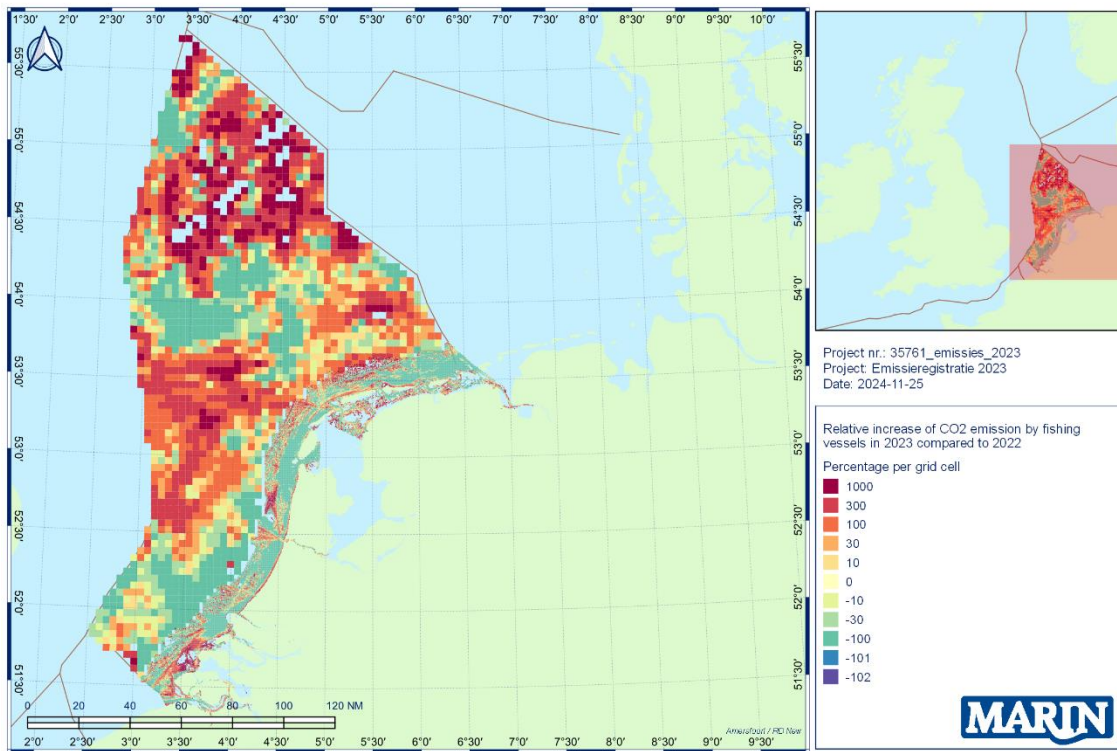


Figure 7-3 Relative change in CO2 emission from 2022 to 2023 observed in the NCS, fishing vessels including trawlers.

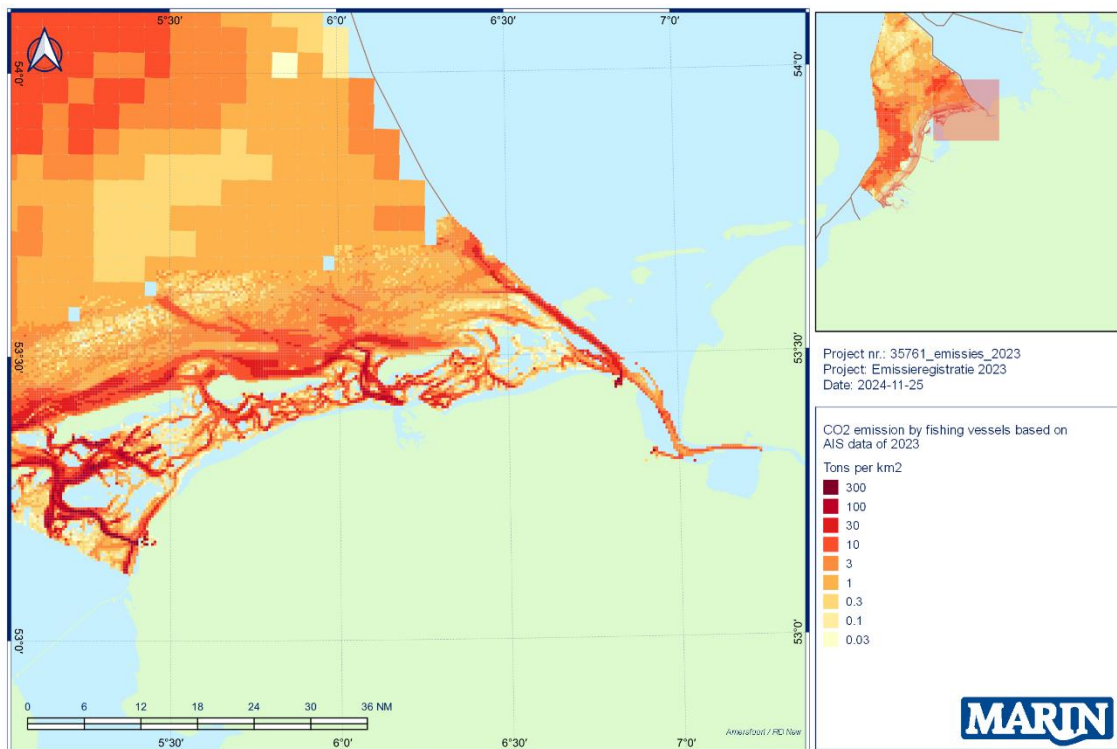


Figure 7-4 CO₂ emission observed in the Dutch Wadden Sea, fishing vessels including trawlers, based on AIS data of 2023

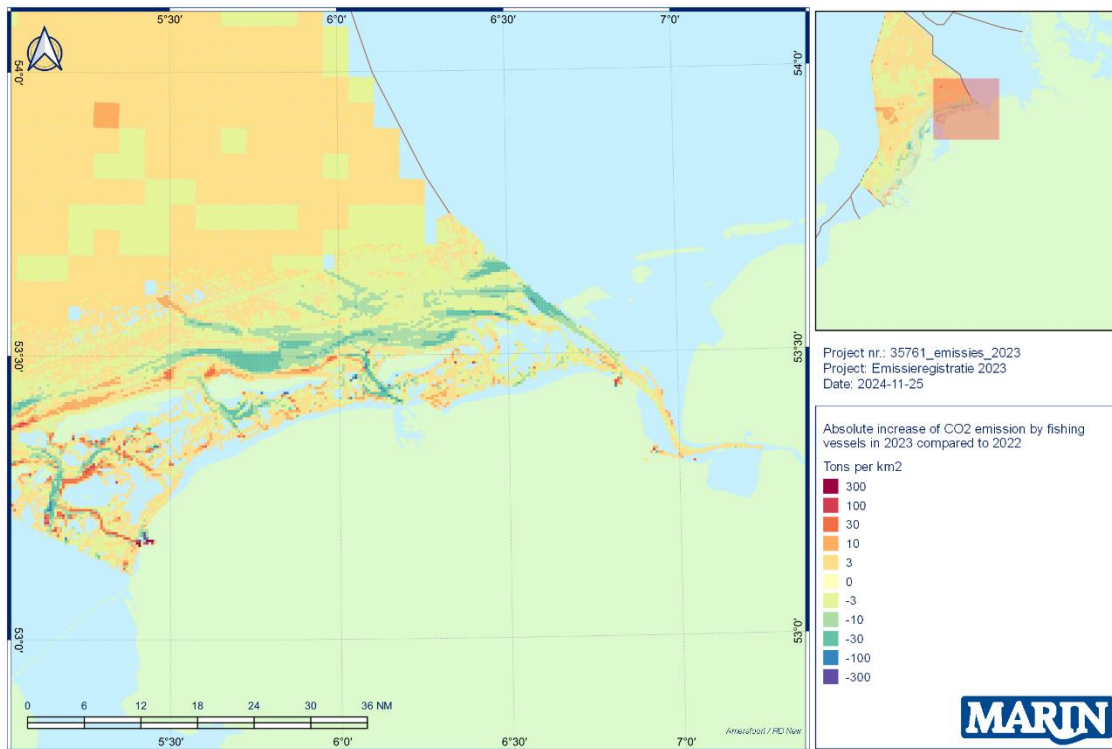


Figure 7-5 Absolute change in CO2 emission from 2022 to 2023 in the Dutch Wadden Sea, fishing vessels including trawlers.

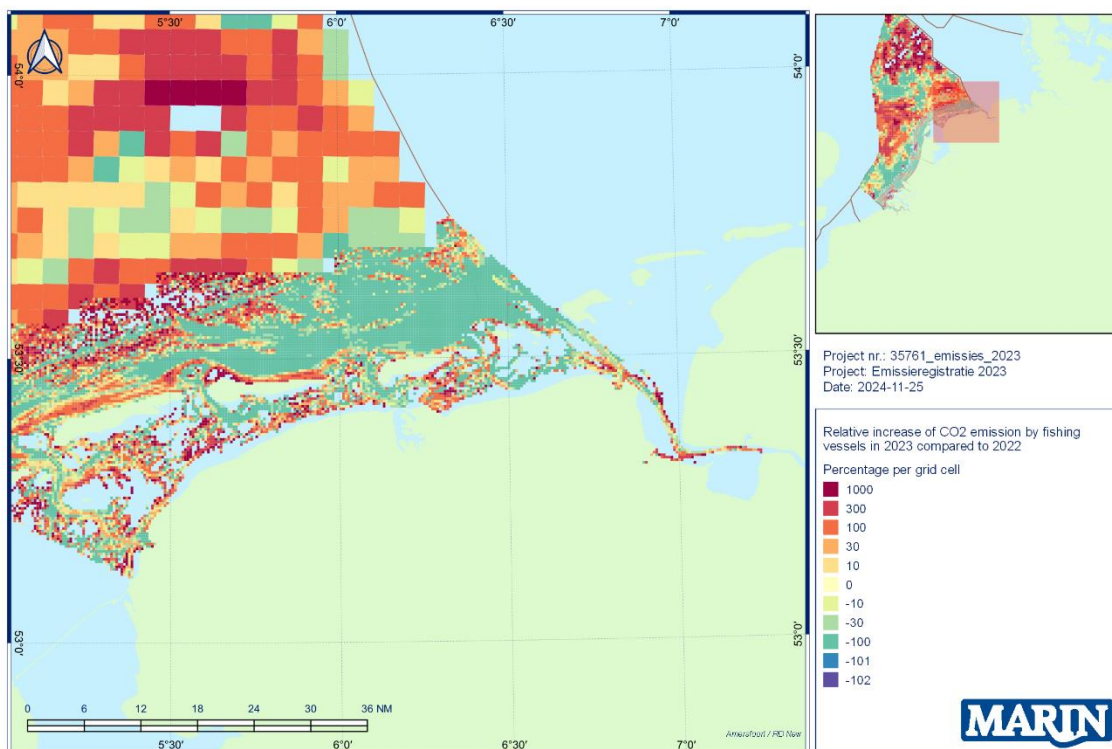


Figure 7-6 Relative change in CO2 emission from 2022 to 2023 in the Dutch Wadden Sea, fishing vessels including trawlers.

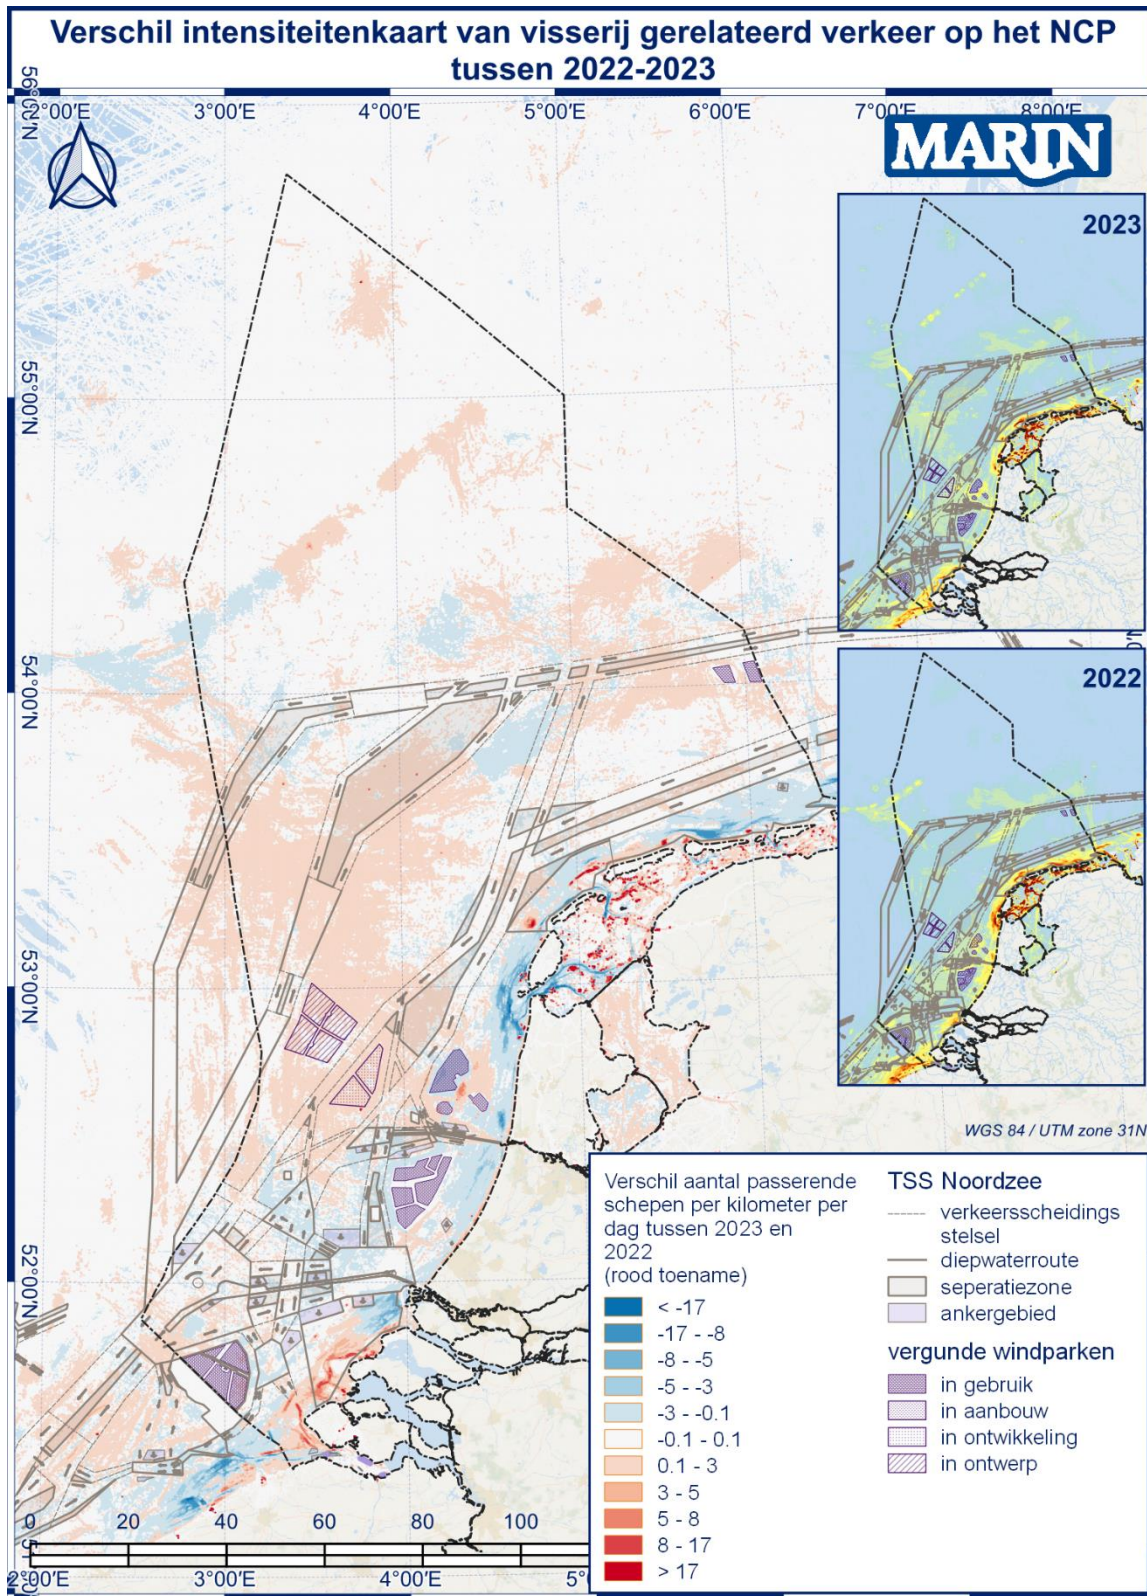


Figure 7-7 Relative change of traffic intensity fishing vessels from 2022 to 2023 on the NCS (source "Netwerkanalyse Noordzee 2023")

8 SUMMARY AND CONCLUSIONS

- **Deliveries**

The main delivery of this study is a set of databases containing gridded emissions of seagoing ships, including fishing vessels, both at sea and in the Dutch port areas. These emissions are distinguished into ship type and size. Where applicable, the emissions are also distinguished into moving / not moving. These databases can be used in studies for which a detailed spatial distribution of the emissions is required.

- **Completeness of AIS data**

The sum of missing periods, which are larger than 10 minutes, is negligible for 2023. The AIS data is practically complete, so there is no need to compensate for this.

- **Activity data**

Compared to 2022 there is an decrease of activities in the Dutch port areas except for the port of Ems. For the NCS combined with 12-miles zone the hours for ships at anchor decreased by 13%. Sailing hours increased with 3%. This can also be seen in the average number of ships per day.

- **Emission results**

The substance CO₂ has the largest contribution to the total emissions in ton (98%). For all ports together, there is an overall decrease of CO₂ by 15%. This decline is mainly caused by ships at berth as the sailing share in port areas is considerably lower. Ships at berth have a total decrease of CO₂ by 24% and sailing ships increased by 1%. For all ports together NO_x and SO₂ emissions decreased.

For NCS combined with the 12-miles zone there is a total decrease of CO₂ emission by 1%. This is due to 28% decrease for ships at anchor and 2% increase for sailing ships. For the Netherlands sea area the average number of ships decreased by 4%, mainly caused by ships at anchor. SO₂ emissions decreased since the previous registration, but is low in absolute terms. NO_x remains approximately at the same level.

- **Emission results fishery**

The absolute contribution of CO₂ emissions by fishing vessels is largest in Harlingen, Western Scheldt and Amsterdam. Compared to the previous year there is a clear increase of CO₂ emissions in the port of Wester Scheldt (9%) and Amsterdam (3%). In Harlingen there is a decrease of CO₂ emissions by 6%. For all ports together the CO₂ emissions have been decreased by 8%.

For the NCP and the 12-miles zone, the CO₂ emissions by fishing vessels remains approximately the same, but there is less fishing activity within the 12 mile zone and an increase in fishing activity outside. In 'Netwerkanalyse Noordzee 2023' [11] where the NCS is monitored annually based on AIS data, this shift is also observed. A decrease in fishing traffic along the coast, but an increase further from the coast.

REFERENCES

- [1] C. van der Tak
Sea Shipping emission 2011: Netherlands Continental Shelf, Port areas and OSPAR region II
MARIN, no: 26437-1-MSCN-rev. 2, July 24, 2013
- [2] M.C. ter Brake & J. Hulskotte
Sea Shipping emissions 2016: Netherlands Continental Shelf and Port areas
MARIN, no: 29555-1-MSCN-rev.2, June 10, 2017
- [3] ir. J. Hulskotte & dr. M.C. ter Brake
Revised calculation of emissions of fisheries on the Netherlands territory
TNO R10784, 29 June 2017
- [4] D.R. Schouten & T.W.F. Hasselaar
Ship emission model validation with noon reports
MARIN, no: 30799-1-TM, 24 August 2018
- [5] M.C. ter Brake, K.F. Kauffman, J. Hulskotte
Sea Shipping emissions 2017: Netherlands Continental Shelf, 12 Mile Zone and Port areas
MARIN, no: 31270-1-MSCN-rev.1, 6 May 2019
- [6] K.F. Kauffman, J. Hulskotte
Sea Shipping emissions 2018: Netherlands Continental Shelf, 12 Mile Zone and Port areas
MARIN, no: 32410-1-MSCN-rev.2, 2 June 2020
- [7] K.F. Kauffman, J. Hulskotte
Sea Shipping emissions 2019: Netherlands Continental Shelf, 12 Mile Zone and Port areas
MARIN, no: 33052-1-MO-rev.1, 9 March 2021
- [8] K.F. Kauffman, J. Hulskotte
Sea Shipping emissions 2020: Netherlands Continental Shelf, 12 Mile Zone and Port areas
MARIN, no: 33641-1-MO-rev.1, 25 January 2022
- [9] K.F. Kauffman, J. Hulskotte
Sea Shipping emissions 2021: Netherlands Continental Shelf, 12 Mile Zone and Port areas
MARIN, no: 34210-1-MO-rev.3, 1 February 2023
- [10] Websites:

<https://www.portofrotterdam.com>

<https://jaarverslag.portofamsterdam.com>

<https://www.portofantwerp.com>

<https://www.groningen-seaports.com>
- [11] K. Kauffman, M. Hermans, T. de Jong, A. Nap
Netwerkanalyse Noordzee 2023
MARIN, no: 34243-3-MO-rev.1, June 2024.

APPENDIX A: EMISSION FACTORS

Written by Jan Hulskotte & René Koch of TNO

A1 SAILING AND MANOEUVRING

A1.1 Main Engines

During sailing and manoeuvring, the main engine(s) are used to propel/manoeuvre the ship. Their emission factors per ship, in g per kWh, were determined by TNO according to the EMS protocols [1, 2] (an English report covering the emission calculations in accordance with the EMS protocols is also available [5]). In the emission factor calculation, the nominal engine power and speed are used. For this study, these parameters were taken from the using ship characteristics provided by IHS Maritime World Register of Ships to The Port of Rotterdam. In the case, that only one single main engine is present, it is assumed that a vessel requires 85% of its maximum continuous rating power (MCR) to attain the design speed (its service speed). When multiple main engines are present, some more assumptions have to be made in order to calculate the required power of the main engines. This is described in the next paragraph 0.

The following formula is used to calculate the emission factor per nautical mile.

Formula 1:

$$EF' = EF * CEF * \frac{P * fMCR}{V}$$

where:

- EF' Actual emission factor expressed as kg per nautical mile.
- EF Basic engine emission factor expressed as kg per kWh (Table A-4/Table A-11).
- CEF Correction factors of basic engine emission factors (Table A-14/Table A-16).
- P Engine power [KiloWatts].
- fMCR Actual fraction of the MCR.
- V Actual vessel speed [knots].

The correction factors of basic engine emission factors (CEF) reflect the phenomena that cause the emission factors to change when engines are active in sub-optimal power ranges.

Besides this change in emission factors, ships do not always sail at their designed speed. As such, the actual power use has to be corrected for the actual speed. The power requirements are approximately proportional to the ship's speed to the power of three. For very low speeds, this approximation would underestimate the required power, since manoeuvring in restricted waters increases the required power. Furthermore, engines are not capable of running below a certain load (minimal fuel consumption of 10% compared to full load). To account for this, the cubed relationship between speed and power is adjusted slightly to:

Formula 2:

$$fMCR = CRScor * (1-Sea\ margin) = \left(\left[\left(\frac{V_{actual}}{V_{design}} \right)^n + c \right] / (1+c) \right) * (1-Sea\ margin)$$

Following values are used in calculations that are reported:

Sea margin = 15%.

n = 3.2 (value was 3.0 in previous reports).

c = 0.1 (value was 0.2 in previous reports).

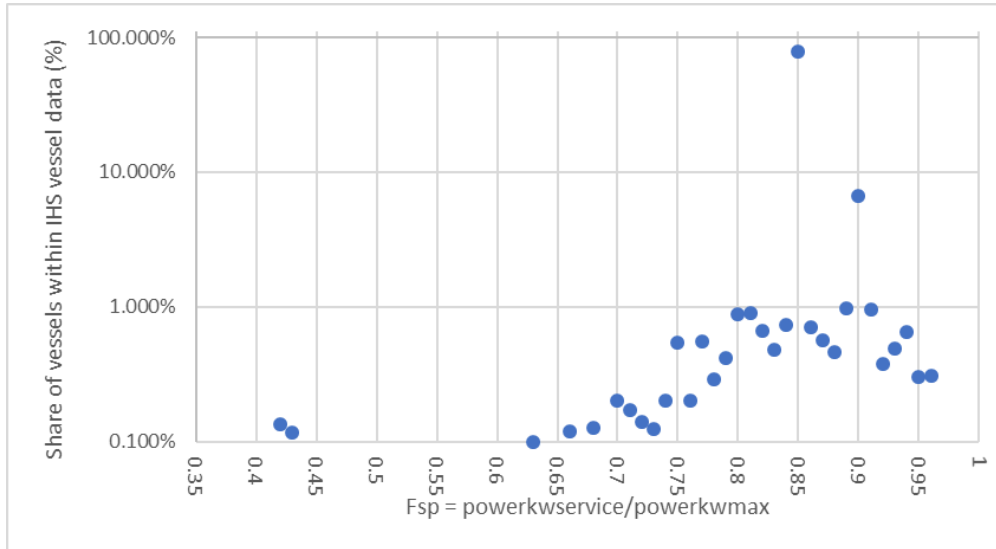


Figure A-1 Statistics of the Sea-margin.

Figure A-1 shows that of the majority of the IHS vessels (about 80%) the power of reaching the service speed is exact 85% of the maximum rated power (Sea Margin = 15%) and for about 7% of the vessels the power of reaching the service speed is exact 90% of the maximum rated power (Sea margin = 10%). These data justify the application of 15% Sea margin within Formula 2.

Using data of sea trials MARIN (D.R. Schouten & T.W.F. Hasselaar [4]) has advised a value of 3.2 for n in Formula 2. Concerning the choice of a proper value of c no clear data were found in the literature. However, it is obvious that the value of zero (used in many studies) will deliver far too low emission data in the low speed range. In a MAN service letter concerning “low load operation” MAN diesel (Jensen and Jacobsen, 2009) show fuel usage of just below 20% of maximum usage around 55% of the service speed. The result of the parameters chosen in formula 2 confirm this number for the fuel usage around 55% of the service speed.

Note that the Correction Reduced Speed factor CRS_{cor} has to be capped at a maximum of 1.176, since this is the value for which 100% engine power is reached. In Figure A-2, the relationship is shown between the speed relative to the service speed and the power relative to the rated power of the ships single propulsion engine as implied in formula 2.

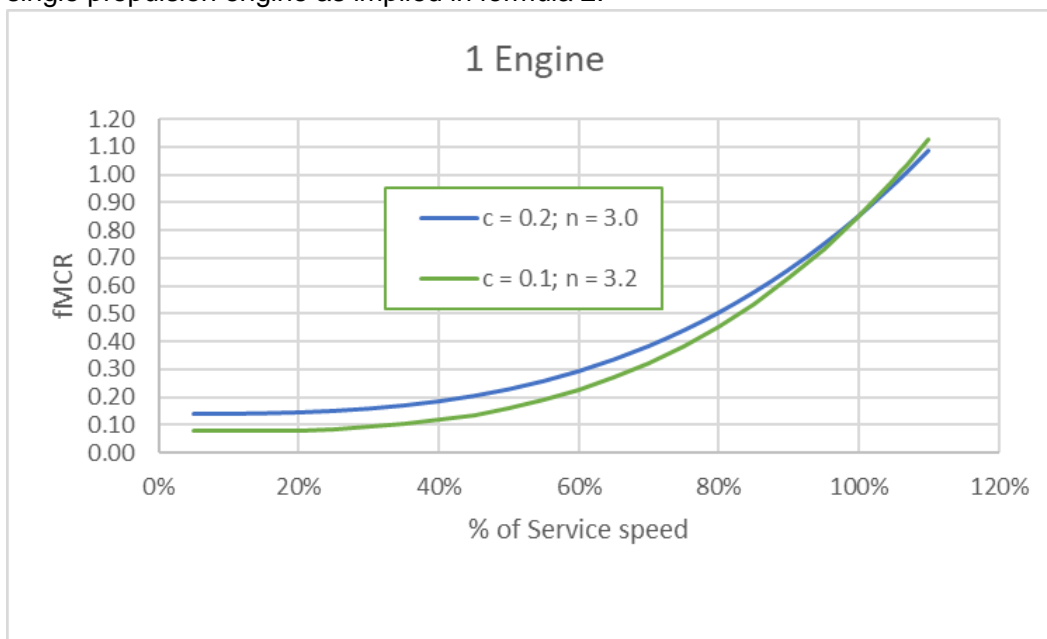


Figure A-2 The relationship between service speed and fMCR at ships with one single propulsion engine used in emission calculations.

A1.2 Multiple propulsion engines

When a ship has multiple main propulsion engines, probably not all of these engines will be used in all situations. For instance, many specialised ships have specialised installations that are only used when these ships are performing their specialised tasks (dredgers, supply ships, icebreakers, tugs, etc.). Other ships may have redundant engine capacity for safety and other reasons (passenger ships, roro-ships). It is rather difficult to account for the usage of multiple engines within emission calculations, since many differences exist between individual ship designs. All kinds of possible situations, which are not known from the AIS-data, may have different influence on emissions from different ships types. Nevertheless, ignoring the existence of multiple engines is not realistic. The presence of multiple engines on some ship types (i.e. passenger and roro-ships) could lead to serious underestimation of total emissions because only the power of the largest engine was taken into account until the emission calculation for 2010.

Before going into an analysis of the usage of main engines when multiple engines are present, it is interesting to analyse which number of engines occurs so often that it has a significant influence on total emissions. In table A-1 it is shown that at ships with multiple engines, only ships with 2 and 4 engines contribute significantly to the total installed power of the whole seagoing fleet. The same conclusion will probably hold with respect to the contribution to total emissions. Therefore, it can be justified to concentrate the analysis on ships with 2 and 4 propulsion engines.

Table A-1 World seagoing fleet with number of installed main engines and their total installed power and average installed power per ship.

Main Engine count	Ships count	Total power installed MW	Average power installed per ship MW	% of total power installed
1	76,135	445,834	5.9	735%
2	40,709	139,118	3.4	22.9%
3	1,866	10,100	5.4	1.7%
4	1,256	8,211	6.5	1.4%
5	56	265	4.7	0.04%
6	84	3,099	36.9	0.5%
8	3	149	49.8	0.02%
	120,109	606,777	5.1	100.0%

As a data source for daily fuel usage the ship characteristic database-item FUEL_CONSUMPTION of the LLI database was analysed. Daily fuel consumption is given for only about 10.000 ships. By far, most of these 10.000 ships are ships with a single main engine. In order to perform a check on the emission calculation, a check on the fuel consumption serves as a very good proxy. When fuel consumption is modelled properly, emission calculation probably will give results with comparable accuracy.

To estimate the daily fuel consumption of a ship (ton/day) we applied a very simple formula:

$$FC = \text{Active_Engines} * \text{MCRss} * \text{Power} * \text{SFOC} * 24/1000.$$

FC : Daily fuel oil consumption (ton/day).

Active_Engines : number of active engines involved in normal propulsion (-).

MCRss : fraction of power to reach service speed (0.85 for single engine ships, for more engines see table A-2).

Power : power of a single engine (MW).

SFOC : specific fuel oil consumption (kg/MWh).

24/1000 : 24 hours/day; 1000 kg/ton.

Note that the calculation of fuel consumption is completely parallel to the calculation of emissions. Instead of EF, approximate values of the SFOC are used. Because (in the LLI database) the service speed is assumed, the values of CEF in the calculation can be ignored because the values will be very close to 1.

The SFOC (specific fuel oil consumption) applied is 0.175 (kg/kWh) for engines above 3 MW and 0.200 (kg/kWh) for engines equal to and below 3 MW. As a reference for these values, see for instance the tables A-4 to A-7.

As a reference for ships with multiple engines, the fuel consumption of ships with 1 main engine is shown. So far, a power setting of 85% MCR is assumed in modelling ship's emissions. It can be seen in Figure A2 that this assumption gives rather accurate results for the majority of ships (but not all ships) with one main engine. The 7918 ships of which data on fuel consumption was available had an average *calculated* fuel consumption of 24.8 ton/day by the main engine while the average *specified* fuel consumption was 26.1 ton/day. This implies that calculated fuel consumption (on average) on the service speed seems to be 5% lower than the specified fuel consumption. Given the number of possible uncertainties, this does not seem to be a major difference.

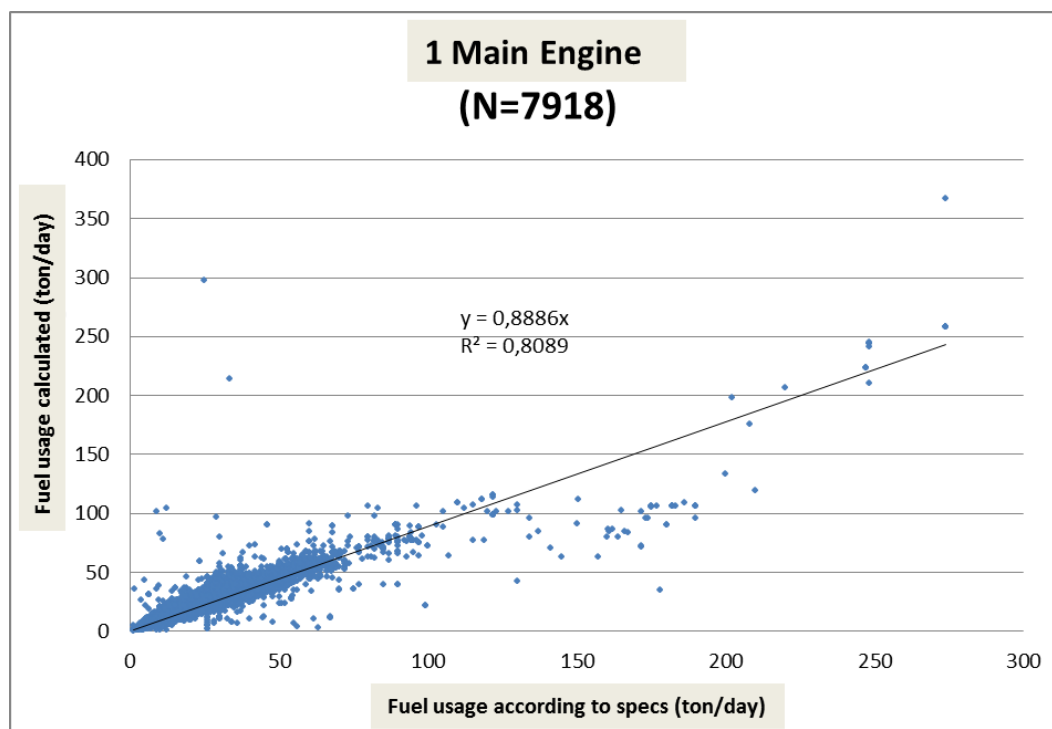


Figure A- 3 Calculated daily fuel usage of one-engine ships compared with specifications.

For ships with two main engines two active engines were assumed and 75% MCR (instead of the standard of 85% [13]) to reach the service speed. It can be seen in Figure A-3 that these assumptions give rather accurate results for the majority of ships with two main engines. The 546 ships of which data on fuel consumption are available show an average calculated fuel consumption of 35.7 ton/day while the average specified fuel consumption is 35.6 ton/day.

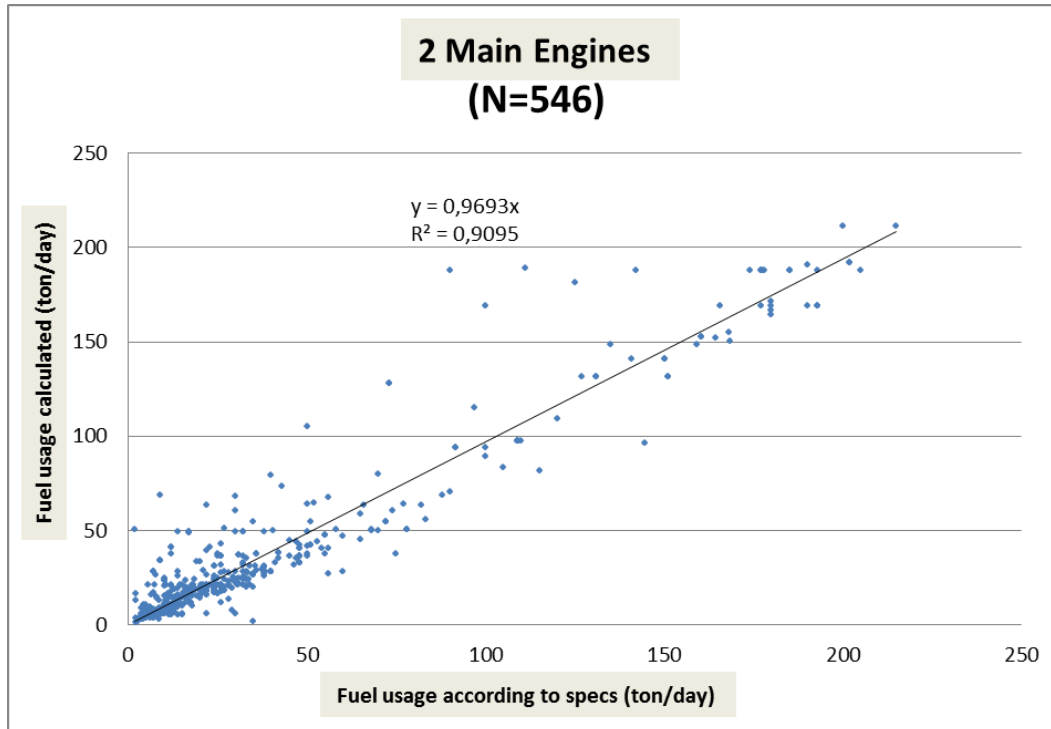


Figure A-4 Calculated daily fuel usage of two engine ships compared with specifications.

For ships with four main engines, four active engines were assumed and also 75% MCR (instead of the standard of 85%) to reach the service speed. As can be seen in Figure A-5 much less data is available for four engine ships, which causes more scatter in the data. The 29 ships of which data are available show an average *calculated* fuel consumption of 39.2 ton/day while the average *specified* fuel consumption is 32.8 ton/day.

It has to be mentioned that some data filtering was applied to four engine ships. Excluded in the analysis are special cases such as high-speed ferries, supply and service vessels, tugs and fishing ships and one ship mainly propelled by LNG.

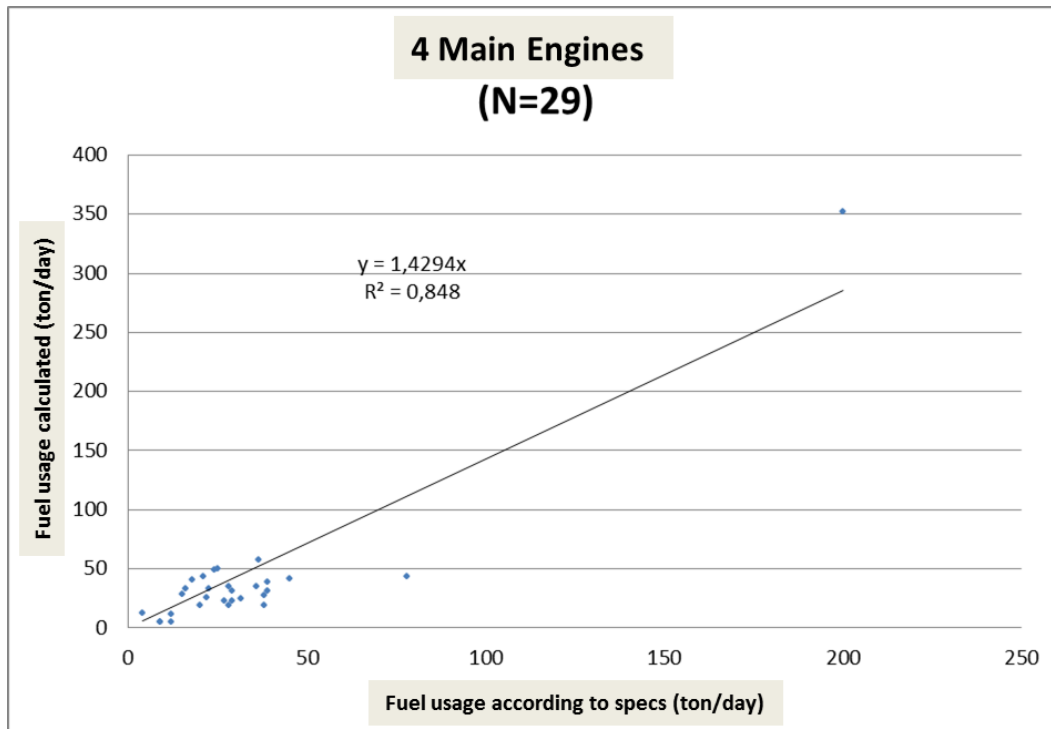


Figure A- 5 Calculated daily fuel usage of four engine ships compared with specifications.

It can be argued that energy consumption of four engined ships seems to be overestimated by the assumptions that are applied, but with such a small dataset it is hard to determine whether the assumptions on ships with four main engines are correct or not. Even if there is an overestimation, this will probably not lead to big differences in total emissions, since the contribution of four engine ships in total installed power is below 4% (Table A- 1).

For ships with other numbers of main engines, the available data did not allow any check of possible assumptions on the fuel consumption.

Apart from the check of fuel consumption of two and four engined ships as presented above, for ships with three or five to twelve engines additional assumptions had to be made in order to enable calculation of emissions of these ships. These assumptions are shown in Table A-2 and are rather uncertain. However, the total installed power is only 2% and therefore, the influence on total emissions will be minimal.

Table A-2 Maximum number of engines assumed to be operational for propulsion with multiple engines present and the fraction of MCR assumed (MCR_{ss}) to attain the service speed.

Ship type	Engines Present →	2	3	4	5	6	7	8	9	10	12
	Engines Operational ↓										
Oil tanker	2	0.75	0.85								
	4			0.75							
Chemical/LNG/LPG tanker	2	0.75	0.85								
	4			0.75		0.75					
	6								0.75		
Bulk carrier	2	0.75	0.85								
	4			0.75	0.75	0.75					
Container ship	2	0.75	0.85								
	4			0.75	0.75	0.75	0.75	0.75			
	6								0.75	0.75	
General Dry Cargo	2	0.75	0.85								
	4			0.75	0.75	0.75		0.75			
RoRo Cargo / Vehicle	2	0.75	0.85								
	4			0.75	0.75	0.75		0.75			
Reefer	2	0.75	0.85								
	4			0.75	0.75						
Passenger	2	0.75	0.85	0.75		0.75			0.75		
Miscellaneous	2	0.75									
	4			0.75							
Tug/Supply	2	0.65	0.85	0.8	0.75	0.85	0.75	0.75	0.75		0.75
Fishing	2	0.75	0.85								
Non Merchant	2	0.5	0.85	0.75	0.75	0.75	0.75	0.75			0.75

The calculation of emissions with multiple engines becomes more complicated because the number of active engines has to be calculated separately. For this reason the calculation of EF' is slightly different from formula 1.

Formula 3:

$$EF' = EF * CEF * \frac{NoEA * P * fMCR}{V}$$

EF' Actual emission factor expressed as kg per nautical mile

EF Basic engine emission factor expressed as kg per kWh (Table A-4/Table A-11)

CEF Correction factors of basic engine emission factors (Table A14/Table A-16)

$NoEA$ Number of active engines (engines that actually are working on a certain moment)

P Engine power of one single engine [Watts]

$fMCR$ Actual fraction the MCR of active engines

V Actual vessel speed [knots]

Formula 4:

$NoEA =$

minimum (Engines Operational, round ($CRS_{cor} * Engines\ Operational * MCR_{ss}$)+1)

(Note that the Number of active engines depends on the level of CRS_{cor} , which depends on the ships speed, and that the maximum number of active engines is equal to Engines Operational).

Formula 5:

$$\text{MCR} = [\text{Engines Operational}] / \text{NoEA} * \text{CRScor} * \text{MCRss}$$

The MCR for individual ship engines is linear inversely related to the Number of active engines (more engines active give lighter work for individual engines). In essence, Formula 3 is the same as Formula 1 except the accounting of Engines Active in the available total Engine power and the application of modified MCR in the selection of the CEF-values (Formula 5).

A1.3 Auxiliary Engines and Equipment

Aside from the main engines, most vessels have auxiliary engines and equipment that provide (electrical) power to the ship's systems. There is limited information available on the use of auxiliary engines. Perhaps the best estimate to date has been made in the *Updated 2000 Study on Greenhouse Gas Emissions from Ships* report (Buhaug et al., 2008, [3]), to which many ship experts contributed. The percentage of the auxiliary power compared to the main engine power as presented in Table 14 of the Buhaug et al report [3] (per ship type) was used in this study. The percentage taken from Buhaug was multiplied with the main power of each individual ship of the same type, of which no details of auxiliary power are included in the LLI-database. For those ships of which the auxiliary power was included in the LLI-database, the loadfactor of auxiliary engines given by Buhaug specified per ship type was applied on the biggest auxiliary engine of the individual ship as inferred from the LLI-database.

A1.4 Engine Emission Factors

Table A-4 to Table A-11 show the engine emission factors [1], [2] per engine type and fuel type expressed in grams per unit of mechanical energy delivered by ships engines (g/kWh). Linear relations exist between SFOC and SO₂ and CO₂ depending on fuel quality. SFOC values as such are not used in emission calculations.

Effect of sulphur in calculation of PM-emission factors

PM-reduction is associated with sulphur reduction because a certain fraction of oxidised sulphur is emitted as sulphuric acid, which easily condenses to sulphuric acid particles (PM) in exhaust gases. Based on the sulphur reductions, additional PM reductions were estimated applying a linear relationship between sulphur and PM as demonstrated in [12].

Partial implementation of the SECA according to the MARPOL Annex VI in 2016 has been assumed. Combined surveillance results of EU competent authorities are shared on a website of [EMSA](#). The results are presented in Table A-3.

Table A- 3 Percentage of fuel samples from ships oils services systems with a sulphur content beyond legal limits.

Region	2015	2016	2017	2018	2019	2020	2021	2022	2023
North sea regions	5.34	6.1	7.23	5.72	3.25	1.60	1.49	2	0.89
Baltic sea	2	3.8	3.46	3.1	2.13	0.59	0.57	0.17	0
Calculated average S% North sea regions	0.15	0.15	0.17	0.15	0.13	0.114	0.113	0.118	0.108

Source: <https://portal.emsa.europa.eu/web/thetis-eu/compliance>

The calculated average S% in North sea regions is calculated by assuming 0.1 %S for compliant fuel samples and 1% S for non-compliant fuel samples. This results in an estimated sulphur percentage of 0.108% for all areas. It can be concluded that compliance of sulphur legislation is slowly improving since 2015. Surveillance by competent authorities seems to be important as numbers of non-compliance show considerable fluctuation over the years and structural differences between areas.

A sulphur% of 0.108% of HFO and MDO was assumed in all areas in 2023 (see table A-3). According to [12] the contribution of PM from sulphur was calculated as 8% of SO₂ (calculated from S%): $0.08 * 0.108 * 20 = 0.1728$ g/kg fuel. For instance having a SFOC value of 210 g/kWh results in PM from sulphur alone in $210/1000 * 0.1728 = 0.036$ g/kWh. The PM emission factors in the tables below (table A4 – A11) are the result of the addition part of PM from sulphur and the part produced by the engines.

Table A- 4 Emission factors and specific fuel oil consumption (SFOC) applied on slow speed engines (SP) operated on heavy fuel oil (HFO), (g/kWh).

Year of build	NO _x	PM-HFO NCP ¹	PM-HFO Other ²	SO ₂ NCP	SO ₂ Other	VOC	CO	CO ₂	SFOC
1900 – 1973	16	0.44	0.44	0.45	0.45	0.6	0.75	666	210
1974 – 1979	18	0.44	0.44	0.43	0.43	0.6	0.75	635	200
1980 – 1984	19	0.44	0.44	0.41	0.41	0.6	0.75	603	190
1985 – 1989	20	0.44	0.44	0.39	0.39	0.6	0.63	571	180
1990 – 1994	18	0.44	0.44	0.38	0.38	0.5	0.5	555	175
1995 – 1999	15	0.34	0.34	0.37	0.37	0.4	0.5	539	170
2000 – 2010	~rpm ³	0.34	0.34	0.36	0.36	0.3	0.5	533	168
2011 –		0.23	0.23	0.36	0.36	0.3	0.5	524	165
Tier III		0.23	0.23	0.33	0.33	0.05	0.7	481	152

¹ NCP: Dutch Continental Shelf.

² Other areas: Include harbours areas.

³ Dependant on revolutions per minute (Table A-8).

Table A-5 Emission factors and specific fuel oil consumption (SFOC) applied on slow speed engines (SP) operated on marine diesel oil (MDO), (g/kWh).

Year of build	NO _x	PM-MDO NCP	PM-MDO Other	SO ₂ NCP	SO ₂ Other	VOC	CO	CO ₂	SFOC
1900 - 1973	16	0.34	0.34	0.45	0.45	0.6	0.75	666	210
1974 - 1979	18	0.34	0.34	0.43	0.43	0.6	0.75	635	200
1980 - 1984	19	0.34	0.34	0.41	0.41	0.6	0.75	603	190
1985 - 1989	20	0.34	0.34	0.39	0.39	0.6	0.63	571	180
1990 - 1994	18	0.34	0.34	0.38	0.38	0.5	0.5	555	175
1995 - 1999	15	0.24	0.24	0.37	0.37	0.4	0.5	539	170
2000 - 2010		0.24	0.24	0.36	0.36	0.3	0.5	533	168
2011 -	~rpm ⁴	0.23	0.23	0.36	0.36	0.3	0.5	524	165
Tier III		0.18	0.18	0.35	0.35	0.05	0.7	478	151

Table A-6 Emission factors and specific fuel oil consumption (SFOC) applied on medium/high speed engines (MS) operated on Heavy fuel oil (HFO), (g/kWh).

Year of build	NO _x	PM-HFO NCP	PM-HFO Other	SO ₂ NCP	SO ₂ Other	VOC	CO	CO ₂	SFOC
1900 - 1973	12	0.65	0.65	0.49	0.49	0.6	0.75	714	225
1974 - 1979	14	0.65	0.65	0.46	0.46	0.6	0.75	682	215
1980 - 1984	15	0.65	0.65	0.44	0.44	0.6	0.75	651	205
1985 - 1989	16	0.65	0.65	0.42	0.42	0.6	0.63	619	195
1990 - 1994	14	0.64	0.64	0.41	0.41	0.5	0.5	603	190
1995 - 1999	11	0.53	0.53	0.4	0.4	0.4	0.5	587	185
2000 - 2010	~rpm ⁴ 9 ⁵	0.53	0.53	0.39	0.39	0.3	0.5	581	183
2011 -	~rpm ⁴ 7 ⁵	0.53	0.53	0.39	0.39	0.3	0.5	571	180
TIER III	~rpm ⁴ 2.2 ⁵	0,38	0,38	0.36	0.36	0.05	0.7	524	165

² applied on auxiliary engines only

Table A-7 Emission factors and specific fuel oil consumption (SFOC) applied on medium/high speed engines (MS) operated on marine diesel oil (MDO), (g/kWh).

Year of build	NO _x	PM-MDO NCP	PM-MDO Other	SO ₂ NCP	SO ₂ Other	VOC	CO	CO ₂	SFOC
1900 - 1973	12	0.35	0.35	0.49	0.49	0.6	0.75	714	225
1974 - 1979	14	0.35	0.35	0.46	0.46	0.6	0.75	682	215
1980 - 1984	15	0.34	0.34	0.44	0.44	0.6	0.75	650	205
1985 - 1989	16	0.34	0.34	0.42	0.42	0.6	0.63	619	195
1990 - 1994	14	0.29	0.29	0.41	0.41	0.5	0.5	603	190
1995 - 1999	11	0.23	0.23	0.4	0.4	0.4	0.5	587	185
2000 - 2010	~rpm ⁴ 9 ⁵	0.23	0.23	0.4	0.4	0.3	0.5	581	183
2011 -	~rpm ⁴ 7 ⁵	0.23	0.23	0.39	0.39	0.3	0.5	571	180
TIER III	~rpm ⁴ 2.1 ⁵	0,18	0,18	0.35	0.35	0.05	0.7	520	164

² applied on auxiliary engines only

⁴ Dependant on revolutions per minute (Table A-8).

⁵ applied on auxiliary engines only.

Emission factors of CO were reduced by a factor of 4 according to [16]. Emission factors of PM and SO₂ at NCP were lowered based on observations of Chalmers University in commission of the Danish Ministry of Environment and Food concerning the enforcement of IMO SECA [17].

Table A- 8 Emission factors of NO_x dependant on engines RPM.

Year of build	RPM range	IMO-limits (g/kWh)	Emission factor NO _x (g/kWh)
2000 – 2010 (Tier I)	< 130 RPM	17.0	0.87 x 17.0
	Between 130 and 2000 RPM	$45 \times n^{-0.2}$	$0.87 \times 45 \times n^{-0.2}$
	> 2000 RPM	9.8	0.87 x 9.8
2011 – 2022 (Tier II)	< 130 RPM	14.4	0.93 x 14.4
	Between 130 and 2000 RPM	$44 \times n^{-0.23}$	$0.93 \times 44 \times n^{-0.23}$
	> 2000 RPM	7.7	0.93 x 7.7
(Tier III)	< 130 RPM	3.4	0.95 x 3.4
	Between 130 and 2000 RPM	$9 \times n^{-0.2}$	$0.95 \times 9 \times n^{-0.2}$
	> 2000 RPM	2.0	0.95 x 2.0

The reduction factors for Tier I engines (0.87), Tier II engines (0.93) and Tier III engines (0.95) are based on IAPP-certificate engine data obtained in a project for the Port of London Authority [24].

Table A- 9 Emission factors and specific fuel oil consumption (SFOC) of gas turbines (TB) operated on marine diesel oil (MDO), (g/kWh).

Fuel	NO _x	PM-MDO NCP	PM-MDO Other	SO ₂ NCP	SO ₂ Other	VOC	CO	CO ₂	SFOC
MDO	5.7	0.07	0.07	0.67	0.67	0.1	0.32	984	310

Emission factors of steam turbines were partially adjusted according to Cooper [9].

Table A- 10 Emission factors and specific fuel oil consumption (SFOC) of steam turbines (ST) operated on LNG, HFO or MDO, (g/kWh).

Fuel	NO _x	PM NCP	PM Other	SO ₂ NCP	SO ₂ Other	CH ₄	VOC	CO	CO ₂	SFOC
LNG	1.94	0.01	0.01	0.0	0.0	0.045		0.06	688	250
HFO	2.0	0.303	0.303	0.66	0.66		0.1	0.15	971	306
MDO	2.0	0.3	0.3	0.63	0.63		0.1	0.15	923	291

Emissions of more modern LNG tanker propelled mostly propelled by medium speed diesel engines fuelled by LNG were calculated by means of emission factors as shown in the table below.

Table A- 11 Emission factors and specific fuel oil consumption (SFOC) of engines operated on LNG, (g/kWh).

Engine type	NO _x	PM	SO ₂	CH ₄	CO	CO ₂	SFOC
MS-DF*	2.0	0.01	0.003	6.90	1.9	450	162
SP-GDI**	12.5	0.01	0.003	0.15	0.2	475	171
SP (TIER III)	3.4	0.02	0.003	0.15	0.2	475	
ST	1.94	0.01	0.004	0.05	0.06	687.8	

*) MS-DF = Medium-Speed – Dual Fuel

**) SP-GDI = Slow Speed – Gasoline Direct Injection

The methane (CH₄) emission factor of MS-DF (medium speed dual fuel engines) was adapted according to [22]. Other emission factors were based on preliminary estimations by TNO.

A1.5 Fuel allocation

Fuel allocation has been based on IHS-data primarily and secondly some assumptions have been applied. Table A-12 shows allocation of fuel to main and auxiliary engines depending on the indication of the IHS vessel data. Sulphur legislation introduced in 2015 may have resulted in the usage of less HFO than indicated in table A-12. As a consequence, PM emission factors are possibly a little too high. Sulphur emissions are calculated according to the best estimate prevalent sulphur content of fuels (table A-3).

Table A- 12 Fuel allocation to main engines (Fuel ME) and auxiliary engines dependent on IHS fuel indication.

Enginetype	Number of vessels	Average ME (kW)	IHS: FuelType1First	IHS: FuelType2Second	Fuel_ME_	Fuel_AE
Slow-speed engines	29619	13515	Distillate Fuel	Residual Fuel	HFO	MDO
	3738	1348	Distillate Fuel	Not Applicable	MDO	MDO
	354	3176	Residual Fuel	Not Applicable	HFO	MDO
	192	28170	LNG	Distillate Fuel	LNG	MDO
	53	955	Distillate Fuel	Yes, But Type Not Known	MDO	MDO
	15	5432	Distillate Fuel	Unknown	MDO	MDO
	9	14868	LNG	Not Applicable	LNG	MDO
	9	9498	Methanol	Distillate Fuel	MDO	MDO
	4	42766	Distillate Fuel	LNG	LNG	MDO
	3	1100	Distillate Fuel	Distillate Fuel	MDO	MDO
	3	2280	Residual Fuel	Unknown	HFO	MDO
	2	1618	Residual Fuel	Distillate Fuel	HFO	MDO
	2	9350	Gas Boil Off	Distillate Fuel	LNG	MDO
	1	2795	Yes, But Type Not Known	Residual Fuel	HFO	MDO
1	970	Residual Fuel	Yes, But Type Not Known	HFO	MDO	
Medium-speed engines	16917	2700	Distillate Fuel	Not Applicable	MDO	MDO
	8087	7404	Distillate Fuel	Residual Fuel	HFO	MDO
	668	4034	Residual Fuel	Not Applicable	HFO	MDO
	312	27182	LNG	Distillate Fuel	LNG	MDO
	187	1292	Distillate Fuel	Yes, But Type Not Known	MDO	MDO
	39	3378	Distillate Fuel	Unknown	MDO	MDO
	37	5526	LNG	Not Applicable	LNG	MDO
	35	2981	Distillate Fuel	Distillate Fuel	MDO	MDO
	7	1964	Coal	Not Applicable	HFO	MDO
	6	9731	Residual Fuel	Yes, But Type Not Known	HFO	MDO
	5	6472	Yes, But Type Not Known	Residual Fuel	HFO	MDO
	3	6557	Residual Fuel	Distillate Fuel	HFO	MDO
	2	3430	Residual Fuel	Unknown	HFO	MDO
	1	24000	Methanol	Distillate Fuel	MDO	MDO
Gasturbines	23	59326	Distillate Fuel	Residual Fuel	HFO	MDO
	9	25381	Distillate Fuel	Not Applicable	MDO	MDO
	2	18389	Residual Fuel	Not Applicable	HFO	MDO
	1	44000	LNG	Distillate Fuel	LNG	MDO
	1	13000	Distillate Fuel	Unknown	MDO	MDO
Steamturbines	289	25026	Distillate Fuel	Residual Fuel	HFO	MDO
	51	29469	Residual Fuel	Not Applicable	HFO	MDO
	27	27545	Gas Boil Off	Distillate Fuel	LNG	MDO
	8	19100	LNG	Distillate Fuel	LNG	MDO
	8	57299	Nuclear	Not Applicable	none	MDO
	3	47653	Nuclear	Distillate Fuel	none	MDO
1	2589	Yes, But Type Not Known	Not Applicable	HFO	MDO	

Because there are no specific emission factors for methanol available methanol is treated as marine diesel oil in the calculations.

In cases where no specific fuel type was indicated in the IHS-data, it was assumed that HFO is applied in main engines in case main engine power is more than 3000 kW. In case main engine power is less than 3000 kW MDO was assumed when $[Power] - 0.8 \cdot [RPM]$ was lower or equal to 1000 and HFO in case same formula results in a number more than 1000.

The change-over from fuels at LNG-tankers in the model calculations is assumed dependent on the speed of the ships expressed as CRScor. Below a value of CRScor of 0.2, LNG-tankers switch from gaseous LNG to liquid fuel used by main engines according to the scheme presented in the table below. The fuels assumed to be used by the auxiliary engines are also presented in the same table A-13.

Table A- 13 Fuel switch scheme of LNG-tankers in dependence of operational speed.

Engine Type	Main engines		Auxiliary engines	
	$0.2 \leq \text{CRScor} < 1.2$	$0 \leq \text{CRScor} < 0.2$	$0.2 \leq \text{CRScor} < 1.2$	$0 \leq \text{CRScor} < 0.2$
MS	LNG	MDO	MDO	MDO
MS	LNG	HFO	HFO	MDO
SP	LNG	MDO	MDO	MDO
SP	LNG	HFO	HFO	MDO
ST	LNG	MDO	MDO	MDO
ST	LNG	HFO	HFO	MDO

A1.6 Correction factors of engine Emission Factors

At speeds around the design speed, the emissions are directly proportional to the engine's energy consumption. However, in light load conditions, the engine runs less efficiently. This phenomenon leads to a relative increase in emissions compared to the normal operating conditions. Depending on the engine load, correction factors specified per substance can be adopted according to the EMS protocols. The correction factors were extended by distinction of different engine types in order to get more accurate calculations. Three engine groups were discerned: reciprocating engines, steam turbines and gas turbines.

The correction factors used are shown in Table A-14 to Table A-16. The list was extended by some values provided in the documentation of the EXTREMIS model [4].

Table A- 14 Correction factors for reciprocating diesel engines.

Power % of MCR	CO ₂ , SO ₂		NO _x			PM-HFO/ PM-MDO	VOC, CH ₄	CO
	SP	MS	Tier 0 or I	Tier II	Tier III			
10	1.2	1.21	1.34	1.74	6	1.63	4.46	5.22
15	1.15	1.18	1.17	1.52	3	1.32	2.74	3.51
20	1.1	1.15	1.1	1.36	1.75	1.19	2.02	2.66
25	1.07	1.13	1.06	1.3	1.45	1.12	1.65	2.14
30	1.06	1.11	1.04	1.32	1.45	1.08	1.42	1.8
35	1.05	1.09	1.03	1.34	1.45	1.05	1.27	1.56
40	1.045	1.07	1.02	1.34	1.45	1.03	1.16	1.38
45	1.035	1.05	1.01	1.32	1.45	1.01	1.09	1.23
50	1.03	1.04	1.00	1.3	1.45	1.01	1.03	1.12
55	1.025	1.03	1.00	1.27	1.45	1.00	1.00	1.06
60	1.015	1.02	0.99	1.23	1.4	1.00	0.98	1.00
65	1.01	1.01	0.99	1.13	1.25	0.99	0.95	0.94
70	1.00	1.01	0.98	1.01	1	0.99	0.92	0.88
75	1.00	1.00	0.98	0.95	0.85	0.98	0.89	0.82
80	1.01	1.00	0.97	0.95	0.85	0.98	0.87	0.76
85	1.02	1.00	0.97	0.95	0.85	0.97	0.84	0.7
90	1.03	1.01	0.97	0.95	0.85	0.97	0.85	0.7
95	1.04	1.02	0.97	0.95	0.85	0.97	0.86	0.7
100	1.05	1.02	0.97	0.95	0.85	0.97	0.87	0.7

The correction factors for CO₂ and SO₂ are assumed equal. These newly added factors for CO₂ and SO₂ were derived from two recent publications [10] and [11] by taking interpolated values. A distinction was made for Slow-speed engines (referred as SP) and Medium and high-speed engines (referred as MS). Although correction factors for other substances may differ by engine type also, a numerical distinction was not possible so far.

A differentiation in NO_x correction factors between Tier 0 or I versus Tier II engines was considered necessary because of a publication [23]. The Tier II correction factors were estimated by TNO. As a consequence, NO_x emissions of vessels with Tier II engines are in the same range of higher than Tier I engine vessels. This is caused by the circumstance that vessels use most energy in lower power ranges between 30 and 50 percent of MCR and even lower power ranges in some harbour areas. The correction factors can be replaced when sufficient measurement data become available.

A further differentiation in NO_x correction factors for new vessels is introduced for TIER III engines. This is because the North Sea and the Baltic Sea have become NECA areas ("Nitrogen Oxide Emission Control Area") as of the 1st of January 2021. See for further information publication [25].

Since steam turbines are predominantly used by LNG-carriers two types of fuels were assumed to be consumed: LNG and HFO. It was assumed that at lower engine loads (up to CRScor = 0.2) steam turbines are operated by HFO. On higher loads (from CRScor = 0.2) usage of LNG (boil-off gas) is assumed. The source of the correction factors of steam turbines was taken from the EXTREMIS model [4].

Table A- 15 Correction factors for steam turbines.

Power % of MCR	CO ₂	SO ₂	NO _x	PM-HFO	VOC, CH ₄	CO
10	1.4	3.04	0.3	3	5.44	11.65
15	1.4	3.04	0.34	2.8	5.11	10.83
20	1.4	3.04	0.37	2.8	4.72	9.96
25	1.4	3.04	0.41	2.8	4.39	9.09
30	1.2	2.02	0.44	1.5	4.00	8.26
35	1.00	1.00	0.47	1.00	3.61	7.39
40	1.00	1.00	0.51	1.00	3.28	6.57
45	1.00	1.00	0.54	1.00	2.89	5.7
50	1.00	1.00	0.57	1.00	2.56	4.83
55	1.00	1.00	0.61	1.00	2.17	4
60	1.00	1.00	0.64	1.00	1.83	3.13
65	1.00	1.00	0.68	1.00	1.44	2.26
70	1.00	1.00	0.76	1.00	1.33	1.96
75	1.00	1.00	0.84	1.00	1.22	1.65
80	1.00	1.00	0.92	1.00	1.11	1.30
85	1.00	1.00	1.00	1.00	1.00	1.00
90	1.00	1.00	1.00	1.00	1.00	1.00
95	1.00	1.00	1.00	1.00	1.00	1.00
100	1.00	1.00	1.00	1.00	1.00	1.00

Correction factors for gas turbines were estimated with data from the ICAO Aircraft Engine Emissions Databank [7]. The emission behaviour of the GE CF6-6D (marine derivative: GE LM2500) and the Allison 501 (AN 501) was taken as representative for the two most occurring gas turbines in marine applications. CEF values in the low power ranges have been changed since the 2011 calculation, because an adapted interpolation scheme has been applied.

Table A- 16 Correction factors for gas turbines.

Power % of MCR	CO ₂ , SO ₂	NO _x	PM-MDO	VOC	CO
10	1.26	0.23	0.98	48.71	64.4
15	1.17	0.3	0.95	37.73	51.15
20	1.04	0.41	0.9	22.35	32.6
25	0.96	0.48	0.88	13.02	21.34
30	0.87	0.55	0.85	2.58	8.75
35	0.88	0.58	0.84	2.46	7.98
40	0.89	0.61	0.84	2.33	7.2
45	0.91	0.64	0.83	2.21	6.42
50	0.92	0.67	0.82	2.08	5.65
55	0.93	0.7	0.81	1.96	4.88
60	0.94	0.74	0.8	1.83	4.1
65	0.95	0.77	0.8	1.71	3.32
70	0.96	0.8	0.79	1.58	2.55
75	0.97	0.83	0.78	1.46	1.77
80	0.98	0.86	0.78	1.33	1
85	0.99	0.93	0.89	1.17	1
90	0.99	0.95	0.92	1.1	1
95	1	0.98	0.96	1.05	1
100	1	1	1	1	1

A2 EMISSIONS OF SHIPS AT BERTH

When a ship is berthed, in most cases the main engines are stopped. The auxiliary engines and equipment will be kept in service to provide (electrical) power to the ship's systems, on board cargo handling systems and accommodations.

The procedure for the calculation of emissions from ships at berth is derived from the EMS protocol with some minor modifications. The methodology was published in Atmospheric Environment [8]. In the EMS modelling system, a fixed value is assumed for the length of time at berth, for each ship type. In this study, the length of time at berth was derived for each individual event for each ship on the basis of AIS data. Ships with speeds below 1 knot were considered as ships at berth. Since the year of build of each ship was known, emission factors per amount of fuel dependant on the classification of year of build were applied. The amount of fuel used was calculated from the length of time at berth, ship type and volume in gross tonnage. The amount of fuel used at berth is more accurately determined in two reports on behalf of the CNSS project [14], [15].

Table A- 17 Fuel rate of ships at berth, (kg/1000 GT.hour).

Ship type	Fuel rate
Bulk carrier	2.4
Container ship	6
General Cargo	6.1
Passenger <=30000 GT	8.9
Passenger > 30000 GT	32.4
RoRo Cargo	6.1
Oil Tanker	19.3
Other Tanker	14.5
Reefer	19.6
Other	9.2
Tug/Supply	15.6

Since January 1st 2010, the sulphur content of marine fuels used for ships at berth is regulated to a maximum of 0.1 percent. This implies that only marine gas oil with a sulphur content below 0.1 percent is allowed in harbours. The specification of fuel types at berth is adapted according to this new regulation (Table A- 18).

Table A- 18 Specification of fuel types of ships at berth per ship type (%).

Ship type	HFO	MDO	MGO/ULMF
Bulk carrier	0	0	100
Container ship	0	0	100
General Cargo	0	0	100
Passenger	0	0	100
RoRo Cargo	0	0	100
Oil Tanker	0	0	100
Other Tanker	0	0	100
Fishing	0	0	100
Reefer	0	0	100
Other	0	0	100
Tug/Supply	0	0	100

Table A-19 gives figures about allocation of fuel amount over engine types and apparatus during berth.

Table A- 19 Allocation of fuels usage in auxiliary engine types and apparatus per ship type at berth (%).

Ship type	Auxiliary engine (MS)	Boiler
Bulk carrier	90	10
Container ship	70	30
General Cargo	90	10
Passenger	70	30
RoRo Cargo	70	30
Oil Tanker	20	80
Other Tanker	50	50
Reefer	90	10
Other	100	0
Tug/Supply	100	0

In following Table A-20 to Table A- 22, the emission factors used for emissions at berth are presented.

Table A- 20 Emission factors of medium/high speed engines (MS) at berth, (g/kg fuel).

Year of build	NO _x	PM-MDO	VOC	CO
Fuel	all	MGO/ULMF	all	all
1900 – 1973	53	1.4	2.7	3.25
1974 – 1979	65	1.5	2.8	3.5
1980 – 1984	73	1.6	2.9	3.75
1985 – 1989	82	1.8	3.1	3.25
1990 – 1994	74	1.3	2.6	2.75
1995 – 1999	59	0.8	2.2	2.75
2000 – 2010	50	0.8	1.6	2.75
2011 –	43	0.8	1.6	2.75
TIER III	12.81	0.91	0.3	1.50

At berth, usage of medium speed auxiliary engines was assumed at an MCR of 50% and a rate of 1200 RPM.

Table A- 21 Emission factors of boilers of boilers at berth, (g/kg fuel).

Fuel	NO _x	PM-MDO	VOC	CO
MGO/ULMF	3.5	0.7	0.8	1.6

Table A- 22 Emission factors of all engines and apparatus, (g/kg fuel).

Fuel	SO ₂	CO ₂
MGO/ULMF	2.36	3173

In tanker ships, a reduction factor for boilers (50% for PM and 90% for SO₂) is applied to the emission factors, because gas scrubbers are often applied in order to protect ship internal spaces for corrosion by inert gases produced by boilers.

A3 FISHERIES

Fisheries source category covers emissions from fishing activities in the Netherlands, including inland fishing, coastal fishing and deep-sea fishing. Diesel engines are used to propel fishing vessels such as deep-sea trawlers and cutters, and to generate electrical power on-board fishing vessels. These diesel engines can be fuelled with either diesel oil (distillate) or residual fuel oil. The combustion process that takes place in these diesel engines causes emissions of greenhouse gases and air pollutants.

A3.1 Activity data

Two methodologies based on AIS-data are applied from 2016 onwards. For deep-sea trawlers the same AIS-based methodology as used for maritime navigation is applied (see A1 and 0) because essentially no fishing activities are performed on Dutch national territory, including the Dutch Continental Shelf. This means that these vessels essentially are only sailing towards and from remote fishing grounds. For the other fishing vessel categories (rather small vessels mostly cutters) another AIS-based methodology is described in detail by Hulskotte and ter Brake, 2017 [18]. This is essentially an energy-based method whereby energy-rates of fishing vessels are split up by activity (sailing and fishing) with a distinction in available power of propulsion engine(s). For each fishery segment (combination of gear or catch method combined with power category) a fuel rate (kilogram/hour) for sailing or fishing was assessed by Turenhout et al., 2016 [19]. The distinction for each fishery segment between sailing and fishing is based on the actual speed of the fishing vessels as taken from AIS-data.

A3.2 Emission factors

The emission factors of small vessels (other than deep-sea trawlers) are assumed equal to emission factors of inland navigation because the engine types that are applied in these vessels are essentially the same.

Table A- 23 Emission factors and specific fuel consumption applied on fishing vessels, (g/kWh).

Engine year of build From – To	VOC	NOx	CO	PM	SO ₂	SFOC
1959-1973	1.2	10.8	1.1	0.6	0.47	235
1975-1979	0.8	10.6	0.9	0.6	0.46	230
1980-1984	0.7	10.4	0.8	0.6	0.45	225
1985-1989	0.6	10.1	0.65	0.5	0.44	220
1990-1994	0.5	10.1	0.55	0.4	0.44	220
1995-2001	0.4	9.4	0.45	0.3	0.41	205
2002-2007	0.3	9.2	0.4	0.3	0.4	200
2008-2014	0.2	7	0.35	0.2	0.4	200
2015-2022	0.2	7	0.3	0.2	0.4	195

The year of build of the engines of (Dutch and former Dutch) fishing ships were initially purchased from Shipdata (<http://www.shipdata.nl>) in order to select the emission factors from table A-23. Part of this data concerned the engine type and model and the year of build. Data were enriched with engine changes when indicated on the website <http://www.kotterfoto.nl> and data of foreign fishing ships (including installing data of new engines) were added from the [combined European fishing registers](#) or the [FIGIS](#)-database managed by FAO.

As fuel, marine diesel with a sulphur content of 0.1% was assumed.

REFERENCES OF APPENDIX A

- [1] J. Hulskotte (TMO-MEP), E. Bolt (RWS-AVV), D. Broekhuizen (RWS-AVV)
EMS-protocol Emissies door verbrandingsmotoren van varende en manoeuvrerende zeeschepen op het Nederlands grondgebied
Versie 1, 22 november 2003
- [2] J. Hulskotte (TMO-MEP), E. Bolt (RWS-AVV), D. Broekhuizen (RWS-AVV)
EMS-protocol Verbrandingsemissies door stilliggende zeeschepen in havens
Versie 2, 22 november 2003
- [3] Buhaug, Ø., Corbett, J. J., Endresen, Ø., Eyring, V., Faber, J., Hanayama, S., Lee, D. S., Lee, D., Lindstad, H., Mjelde, A., Pålsson, C., Wanqing, W., Winebrake, J. J., Yoshida, K.
Updated Study on Greenhouse Gas Emissions from Ships: Phase I Report, International Maritime Organization (IMO) London, UK, 1 September, 2008
- [4] F. Chiffi, Schrooten E., De Vlieger I., EX-TREMIS - Exploring non road Transport Emissions in Europe – Final Report, IPTS - Institute for Prospective Technological Studies. DG-JRC, 2007
- [5] H. Denier van der Gon, J. Hulskotte, Methodologies for estimating shipping emissions in the Netherlands; A documentation of currently used emission factors and related activity data, PBL report 500099012, ISSN: 1875-2322 (print) ISSN: 1875-2314 (on line), April 2010
- [6] UK Civil Aviation Authority, ICAO Engine Emissions Databank, updated December 2010
- [7] I. Grose and J. Flaherty, LNG Carrier Benchmarking, LNG15 2007, Shell Global Solutions International BV, 2007
- [8] Hulskotte J.H.J, H.A.C. Denier van der Gon, Emissions From Seagoing Ships At Berth Derived From An On-Board Survey, Atmospheric Environment, Doi: 10.1016/j.atmosenv.2009.10.018, 2009
- [9] Cooper D., Representative emission factors for use in “Quantification of emissions from ships associated with ship movements between port in the European Community” (ENV.C.1/ETU/2001/0090), 2002
- [10] Jalkanen J.-P., Johansson L., Kukkonen J., Brink A., Kalli J., Stipa T., Extension of an assessment model of ship traffic exhaust emissions for particulate matter and carbon monoxide, Atmos.Chem.Phys., 12, 2641-2659, 2012
- [11] MAN Diesel&Turbo, SFOC Optimisation Methods For MAN B&W Two-stroke IMO Tier II Engines, document 5510-0099-00ppr, Augustus 2012
- [12] Hulskotte J.H.J., Voorstel voor aanpassing van PM_{2,5} en PM₁₀-fracties van emissies van de zeescheepvaart, TNO-060-UT-2011-02190, 20 december 2011
- [13] J.H.J.Hulskotte, E. Bolt, D. Broekhuizen, EMS-protocol Emissies door Verbrandingsmotoren van Zeeschepen op het Nederlands Continentaal Plat, versie 2, 22 November 2003
- [14] J.H.J Hulskotte, B. Wester, A.M. Snijder, V. Matthias, International survey of fuel consumption of seagoing ships at berth, TNO 2013 R10472, 18 December 2013

- [15] J.H.J., Hulskotte, V. Matthias, Survey of fuel consumption of seagoing tankers at berth in Rotterdam, TNO 2013 R11287, 27 August 2013
- [16] Smith, T. W. P., Jalkanen, J. P., Anderson, B. A., Raucci, C., Traut, M., Ettinger, S., Nelissen, D., Lee, D. S., Ng, S., Agrawal, A., Winebrake, J. J., Hoen, M., Chesworth, S., Pandey, A., *Third IMO GHG Study 2014*; International Maritime Organization (IMO) London, UK, June 2014
- [17] Johan Mellqvist, Vladimir Conde, Jörg Beecken and Johan Ekholm, [Results from airborne Sulphur compliance monitoring in the central and border of the SECA](#), Chalmers University of Technology in commission of Miljø- of FØdevarenministerie
- [18] Hulskotte J.H.J, Brake ter M.C., Revised calculation of emissions of fisheries on the Netherlands territory, TNO report TNO 2017 R10784, 29 June 2017
- [19] Mike Turenhout, Katell Hamon, Hans van Oostenbrugge, Arie Mol en Arie Klok Emissie Nederlandse Visserij, Indicatoren brandstofverbruik voor broeikasgasemissieberekening, Wageningen Economic Research, NOTA 2016-122, Wageningen November 2016
- [20] D.R. Schouten & T.W.F. Hasselaar, Ship emission model validation with noon reports, MARIN, no: 30799-1-TM, 24 August 2018
- [21] Jensen M.C., Jacobsen S.B., Service Letter SL09-511/MTS, MAN Diesel, May 2009
- [22] Stenersen, D., Thonstadt O., HG and NO_x emissions from gas fuelled engines, Mapping, verification, reduction technologies, SINTEF Ocean AS Maritim, Report OC2017 F108, version 3.0, 13-06-2017
- [23] Chih-Wen Cheng, Jian Hua & Daw-Shang Hwang (2018). Nitrogen oxide emission calculation for post-Panamax container ships by using engine operation power probability as weighting factor: A slow-steaming case, *Journal of the Air & Waste Management Association*, 68:6, 588-597, DOI: 10.1080/10962247.2017.1413440
- [24] Tim Williamson, Jan Hulskotte, Richard German, Kirsten May, Port of London Emissions Inventory 2016, Customer Port of London Authority and Transport for London, 2017
- [25] Emiel van Eijk, Maarten Verbeek, René van Gijlswijk, Jeroen Daey Ouwens, Ruud Verbeek, Jan Hulskotte, Hein de Wilde, TNO Kennisinbreng Mobiliteit voor Klimaat- en Energieverkenning (KEV) 2019, TNO rapport, TNO 2019 P12134, 14 februari 2020